

IND F1000 SERIES

High-Efficiency Flap Barrier Turnstile

Robust access control for indoor and outdoor scenarios — engineered for speed, security, and durability in high-traffic environments.

RFID

QR Code

Facial ID



OVERVIEW

Built for Demanding, High-Traffic Access

Constructed with a robust cold-rolled SPCC steel chassis and PC retractable barrier, the IND F1000 SERIES ensures durability and safety with a modern appearance. A DC brushless motor delivers rapid operation — opening or closing in less than one second per movement — while anti-pinch and anti-tailgating detection keep every passage secure.

KEY FEATURES

**Rapid Operation**

Brushless DC motor opens/closes in ~0.3s, enabling smooth throughput of up to 60+ persons per minute.

**High Security**

Advanced infrared sensing with five sensor pairs precisely prevents tailgating and unauthorized entry.

**Exceptional Stability**

Durable motor rated for 5 million cycles (MCBF) ensures reliable, low-maintenance operation.

<1s

Per Movement

60

Passengers / min

5M

Cycles MCBF

IPX4

Protection Rating

CAPABILITIES

Flexible, Powerful & Durable



Flexible Customization

Integrates IC/ID card readers, QR code readers, and facial recognition to meet diverse venue needs.



Powerful Passage Modes

Configurable one-way, two-way, or free passage to suit varied access control scenarios.



IPX4 Weather Protection

Powder-coated cold-rolled steel resists corrosion with IPX4-rated water protection.

TECHNICAL SPECIFICATIONS

IND F1000 SERIES

Mechanical & Build		Power, Safety & Access	
Lane Type	Single Lane	Power Supply	110/220 VAC, 50–60 Hz
Lane Width	550 mm	Power Rating	10VA (Standby) / 40VA (Operation)
Lane Height	1020 mm	Logic Voltage	24V DC
Barrier Type	Retractable PC flap	Ingress Rating	IPX4
Motor	DC brushless	Op. Temp.	-20°C to 70°C
Speed	<1s per movement	Op. Humidity	20–85% RH
Chassis	Cold-rolled SPCC steel	Noise Level	<60 dB
Chassis Colour	White	Security	Anti-tailgate / intrusion
IR Sensors	5 pairs	Emergency	Auto-unlock on power off
Weight (Net)	50 kg	Flow (RFID/QR)	30 / min
Dimensions	1200×734×1020 mm	Flow (Facial)	15 / min
Certifications	CE, FCC	Environment	Indoor / Outdoor

APPLICATION SCENARIOS



School



Museum



Factory



Gym



Metro




Airport

DIMENSIONS & LAYOUT

Product Dimensions

Dimensions (mm)

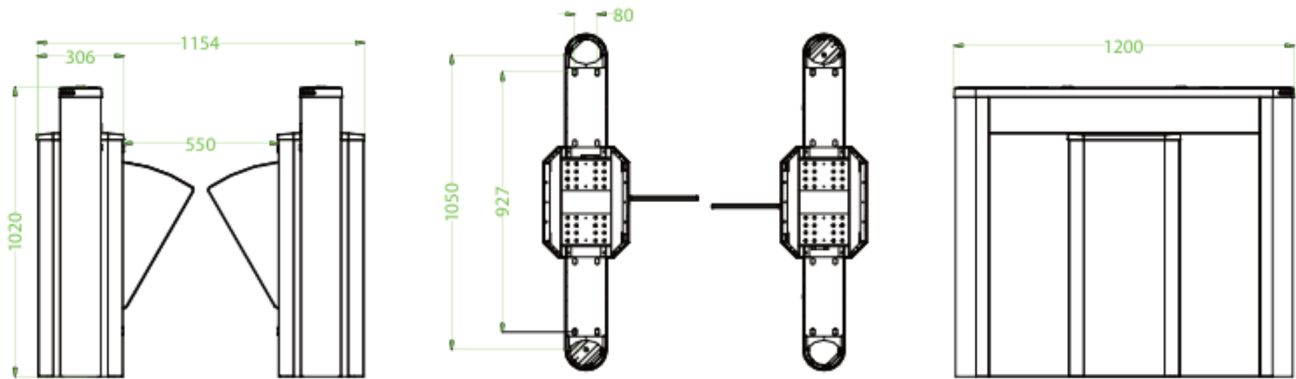

LENGTH

1200

millimetres

WIDTH

1154

millimetres

HEIGHT

1020

millimetres

LANE

550

clear passage (mm)

Cabinet & Lane		Weight & Material	
Overall Length	1200 mm	Net Weight	50 kg
Overall Width	1154 mm	Chassis Material	Cold-rolled SPCC steel
Overall Height	1020 mm	Chassis Colour	White
Lane Width	550 mm	Ingress Rating	IPX4
Lane Type	Single Lane	Mounting	Floor-fixed
Barrier Type	Retractable PC flap	Environment	Indoor / Outdoor

ⓘ All dimensions in millimetres unless stated. Allow ≥ 50 mm clearance around each cabinet for cabling and maintenance access.