

HIGH-TRAFFIC ACCESS

IND F1000 SERIES

High-efficiency flap barrier

INDIAN INFOTECH

SECURE ACCESS

PRODUCT DATA SHEET



Product Introduction

A high-efficiency flap barrier turnstile engineered for speed, security, and durability in high-traffic indoor and outdoor environments.

Core Functions



Rapid operation

Brushless motor for fast opening and closing.



Anti-tailgating

Infrared sensing supports secure passage control.



Durability

Cold-rolled SPCC steel chassis and reliable motor design.



Lane type

Single lane

Key Features

◆ Lane type

Single lane

◆ Lane width

550 mm

◆ Lane height

1020 mm

◆ Barrier

Retractable PC flap

◆ Motor

DC brushless

◆ Speed

Less than 1 second per movement

Technical Specifications

550 mm

Lane width

1020 mm

Lane height

5 pairs

IR sensors

**110/220 VAC,
50-60 Hz**

Power

Product Specifications


General & Physical

Lane type	Single lane
Lane width	550 mm
Lane height	1020 mm
Barrier	Retractable PC flap
Motor	DC brushless
Speed	Less than 1 second per movement

Electrical, Control & Safety

IR sensors	5 pairs
Power	110/220 VAC, 50-60 Hz
Ingress	IPX4
MCBF	5 million cycles
Flow RFID/QR	30 per minute
Flow facial	15 per minute


Application Scenarios

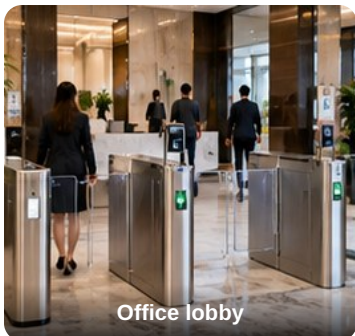

Office lobby



Transit entrance

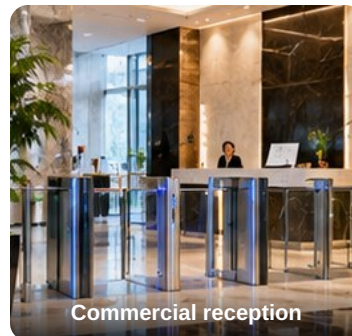

Commercial reception



Factory access

Illustrative environments — not photographs of verified Indian Infotech installations.