

**SINGLE-LANE SWING BARRIER**

# IND 300SB

A single-lane swing barrier turnstile designed for smooth, silent operation with low power draw

SINGLE-LANE SWING BARRIER

INDIAN INFOTECH

SECURE ACCESS



## Product Introduction

A single-lane swing barrier turnstile designed for smooth, silent operation with low power draw and automatic opening after valid card or fingerprint recognition.

## Core Functions



### Access recognition

Automatic opening after valid card or fingerprint recognition.



### Reliability

SUS304 stainless-steel casework for durable operation.



### Emergency release

Barrier release during power outage for exit safety.



### Low noise

Opening noise specified at 30 dB or less.

## Key Features

◆ Access: RFID and fingerprint

◆ Material: SUS304 stainless steel + acrylic

◆ Power: AC110V/220V, 50/60Hz

◆ Speed: 30 people per minute

◆ Lane width: 750 mm

◆ Motor: Brushless motor

## Technical Specifications

**0.8s**  
Opening time

**750 mm**  
Lane width

**Support**  
Emergency

**2 million**  
MCBF

## Product Specifications

### General & Physical

Access RFID and fingerprint

Material SUS304 stainless steel + acrylic

Power AC110V/220V, 50/60Hz

Speed 30 people per minute

Lane width 750 mm

### Access, Control & Electrical

Motor Brushless motor



Emergency Support

Opening time 0.8s

MCBF 2 million

Environment Indoor / outdoor if sheltered

## Application Scenarios

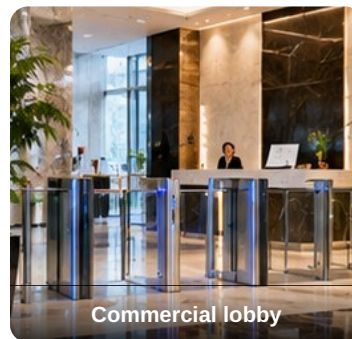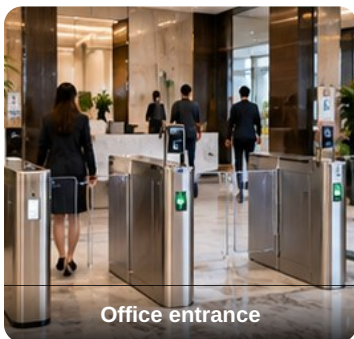

Illustrative environments — not photographs of verified Indian Infotech installations.