


429, GALA EMPIRE, OPP DOORDARSHAN KENDRA, DRIVE IN ROAD, THALTEJ, AHMEDABAD - 380054
M : 7600066770 EMAIL : info@indianinfotech.org WEB : www.indianinfotech.org

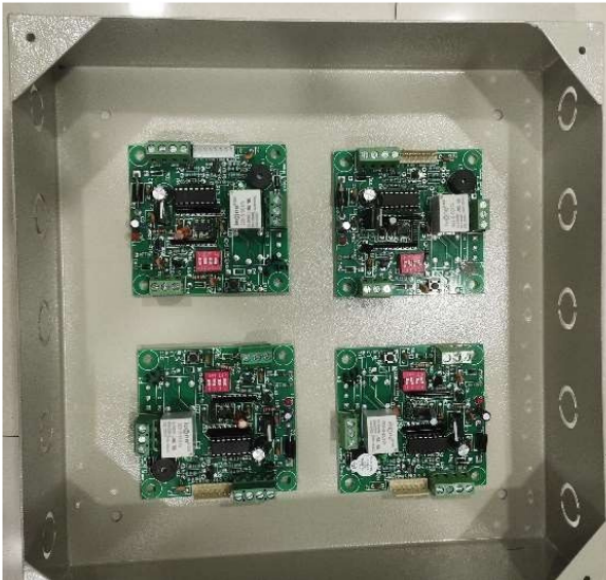

Door Interlock System

The Door Interlock Card Module is a modular system designed for scalable configurations, managing secure interlock setups for 2, 3, 4, 6, and 8 doors. Its modular design allows interlock card modules to be added or removed according to the number of doors required.

Door Interlock Systems

Number of Doors	Door Interlock System Type Normal State Model Number	
2	2 Door Interlock System Normal Close IND201DL	
3	3 Door Interlock System Normal Close IND301DL	
4	4 Door Interlock System Normal Close IND401DL	
6	6 Door Interlock System Normal Close IND601DL	
8	8 Door Interlock System Normal Close IND801DL	
Feature	Description	
Modular System	Easily scalable by adding or removing interlock card modules to accommodate door expansion.	
Power Supply	Input: 12V DC; Output: 12V DC for Electronic Locks (EM Lock).	
Magnetic Contact Input	Monitors the door status (open/closed).	
Door Open Switch Input	Allows for manual release of the door.	
Emergency Switch Input	Dedicated input for emergency door release system.	
RX/TX Connections	For communication between interlock modules.	
Green/Red LED Outputs	5V LED output for door status indicators (locked/unlocked).	
Dip Switch Configurable Logic	Allows configuration for Normal Open (NO) or Normal Closed (NC) door behavior.	
Emergency Mode	Override option to release all doors in emergency situations, configurable via dip switches.	

Inputs, Outputs and Additional Specifications

Input/Output	Description
12V DC Input	Power input for the interlock card.
12V DC EM Lock Output	Power output for Electronic Locks (EM Locks) for each door.
Magnetic Contact Input	Input for monitoring door status (open/closed).
Door Open Switch Input	Input for door release switch.
RX/TX Communication	Communication between interlock modules for synchronized control.
Green/Red LED Output (5V)	LED outputs indicating locked or unlocked status.
Emergency Switch Input	Input for an emergency override switch, which can release all doors.

Interlock Logic

Feature	Description
Dip Switch Configuration	Normal Open (NO) or Normal Closed (NC) door operation.
Emergency Mode	Dip switch settings enable or disable system-wide emergency release.
LED Indicators	Configurable door status: red for locked and green for unlocked.

Additional Specifications and Optional Features

Operating Voltage	12V DC
Status Indicators	Red/Green LEDs (5V)
Mounting Options	DIN rail or wall mount
Expansion Capability	Add interlock card modules to scale up the system.
Remote Monitoring Capability	Integrates with external control systems for real-time monitoring and control.
Backup Power Integration	Compatible with battery backup systems or UPS during power outages.
System Integration	Can integrate with building automation systems, fire alarms, and access control systems.