



SECTION 1: POWER ENTRY, REGULATION & CURRENT SENSING

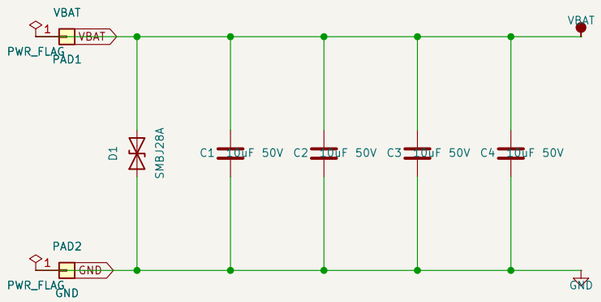

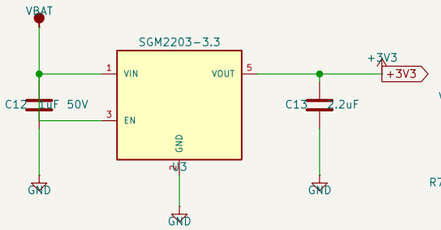





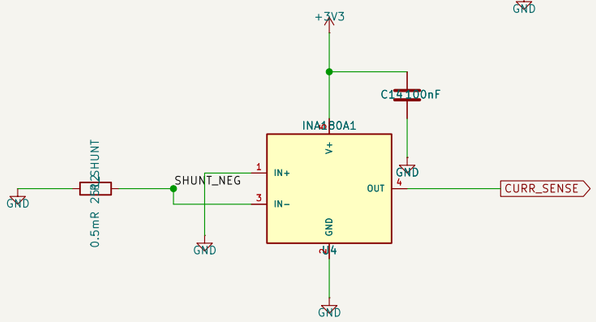


SECTION 2: MICROCONTROLLER & PERIPHERALS (STM32G071)

J1: SWD DEBUG INTERFACE




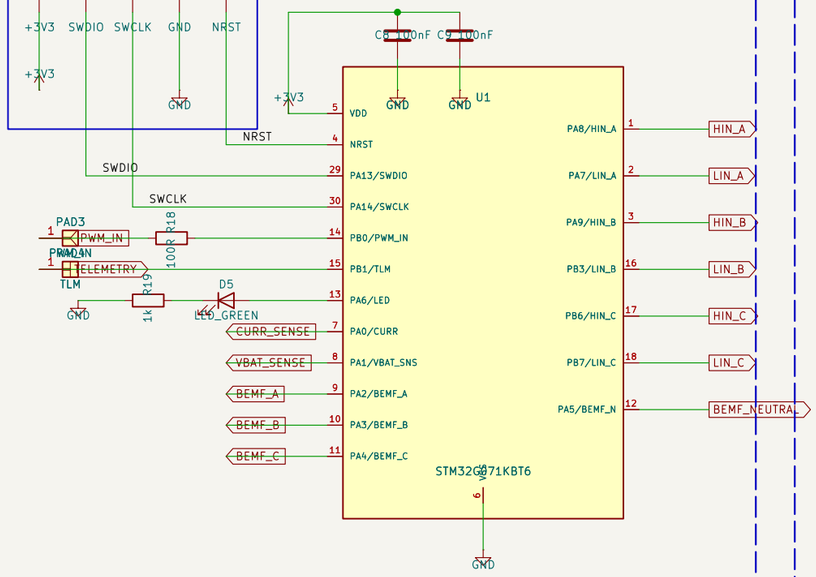



SECTION 3: 3-PHASE GATE DRIVER (FD6288Q)

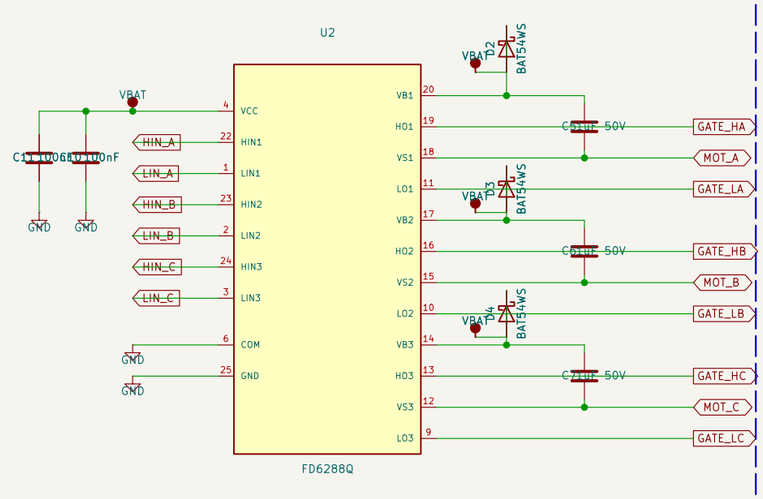

SECTION 4: 3-PHASE INVERTER BRIDGE & BEMF SENSING

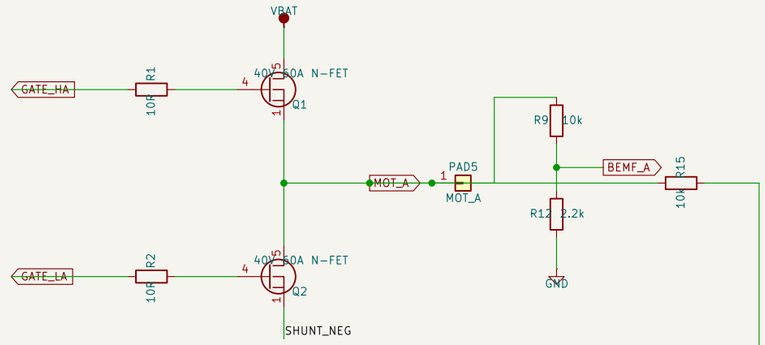

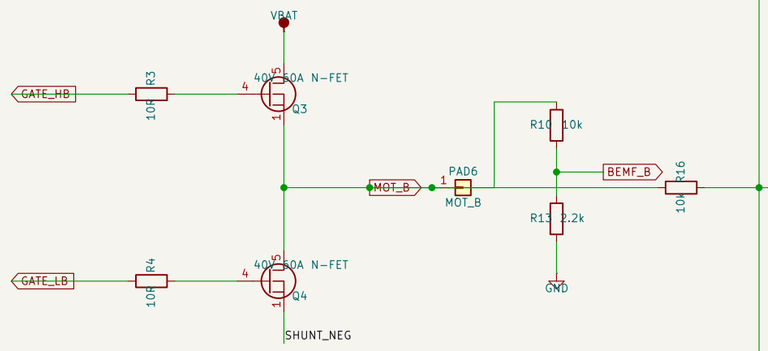

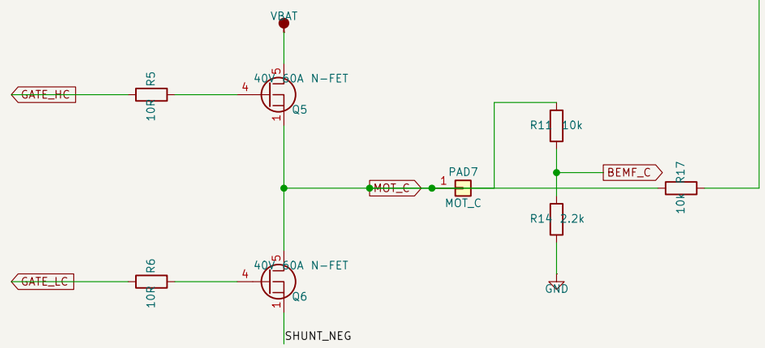

MCU: STM32G071KBT6 / Driver: FD6288Q / Six 40V/60A NFETs
Input: 3S–6S LiPo (9V – 25.2V) | Continuous: 35A / Peak: 45A
Embedded Power Stage for KiCad & FastBonding
Autonomous Power Systems

Sheet: /
File: custom_esc_35a.kicad_sch

Title: CUSTOM 3S–6S 35A/45A SINGLE BLDC ESC

Size: A3	Date: 2026-11-12	**Rev: v2.0**
KiCad E.D.A. 10.0.0		Id: 1/1