




ATLASTM
TECHNOLOGIES PVT. LTD.
CIN No.U72200GJ2009PTC056104

Cell : +91 09099 314000
+91 09099 414000

STATIONARY CONCRETE BATCHING PLANT CAP. 30 TO 200 M3

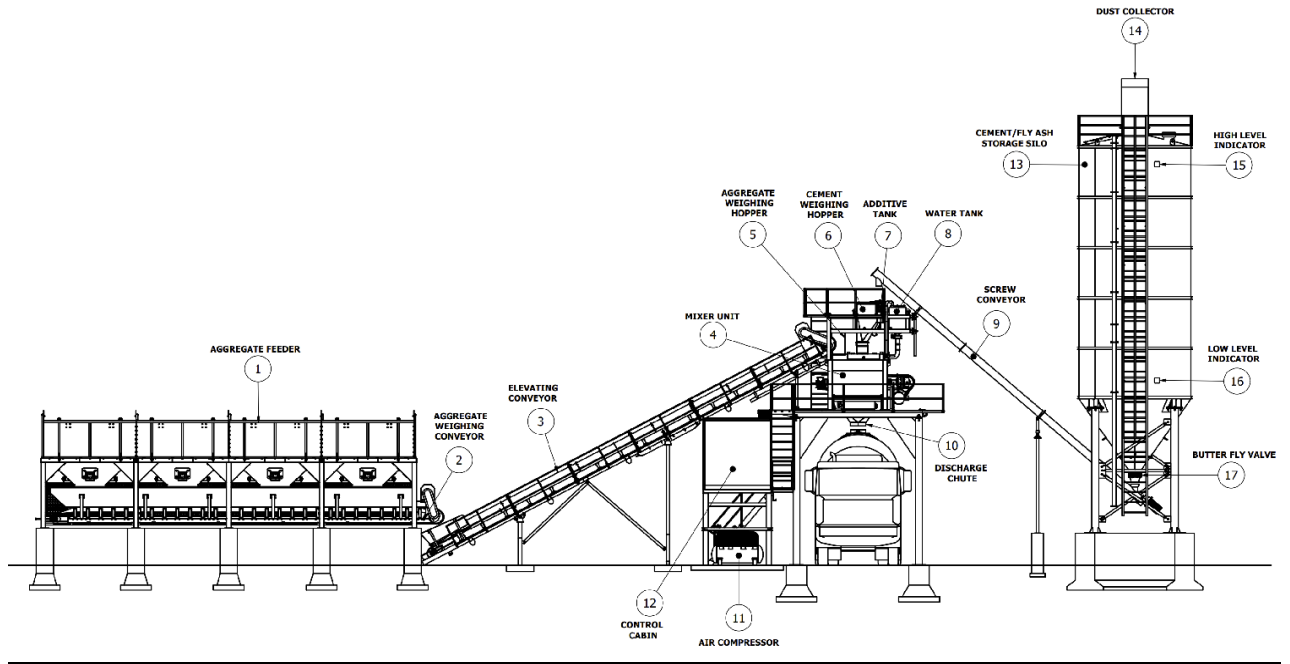

Reg. Off.: Block no.97,
Mehsana-Ahmedabad Highway,
B/h.Bhupendra House,
At & Po. Ditasan-382710,
Dist. Mehsana.[Gujarat] INDIA.

✉: contact@atlastechnologiesindia.com

🌐: www.atlastechnologiesindia.com

MFG. OF ROAD & CIVIL CONSTRUCTION MACHINERY

Subject to Mehsana Jurisdiction



**DETAIL FORM FOR STATIONERY CONCRETE BATCHING PLANT WITH TWIN SHAFT
MIXER**

BELOW REFERENCE IS 120 M³ PER HOUR

Item 1	four (4) bin feeder with individual bin , conveyors, weighing/mixing section & control cabin
Item 2	100 tons cement silo with accessories (Optional)
Item 3	cement feeding system for cement silo(Optional)
Item 4	Plant control system
Item 5	Wiring
Item 6	Supervisory installation and commissioning

TECHNICAL SPECIFICATION

PLANT CAPACITY

For Reference: 120 m³ based on a mixer capacity of 4500 / 3000 litres. Of vibrated concrete per batch 3.0 m³ and at (90) second weigh/mix cycle.

Assuming the following conditions: -

- 1) 100% Plant utilisation
- 2) Material density (2400) Kg/m³

**1 INDIVIDUAL 4 BIN FEEDERS, GATHERING CONVEYORS,
DISCHARGE CONVEYORS & CABIN**

1.1 AGGREGATE HOPPERS

Feeders	-	Four/Five (4/5) individual Bin
Capacity	-	25 m ³ /each bin
Loading width	-	2.9 meter
Loading height	-	6.5 meter
Material	-	5 mm thick mild steel plate
Vibrator	-	One (1)
Discharge gates	-	Eight (Each bean two) pneumatically controlled discharge gates.



1.2 GATHERING / WEIGH CONVEYOR

Weigh conveyor	-	Mounted under weigh hoppers
Length	-	12.8 Metres
Belt	-	1000 mm wide 4 ply with vulcanised joint
Idlers	-	Troughed bolted to steel section support frame
Drive	-	25 HP gear motor unit direct on head shaft
Belt tensioning	-	Tension bolts fitted to tail drum slide bearings
Belt scraper	-	Fitted under head drum
Weigh hopper	-	Manufactured from 5 mm mild steel plate
Weighing capacity		4.5 m ³ total from all hoppers, mounted on load cells
Load cells	-	Share beam type cap. 2200 kg. (Six nos.)
Transfer load capacity		250 Kg. cm ²
Emergency stop switch-		One (1) fitted at the bottom of the weigh conveyor

1.3 CHARGING CONVEYOR

Charging conveyor	-	Mounted between four bin feeders and mixing tower.
Length	-	22.6 Metres
Belt	-	1000 mm wide 4 ply chevron type (Ribbed) with vulcanised joint
Idlers	-	Troughed bolted to steel section support frame
Drive	-	40 HP gear motor unit direct on head shaft
Belt tensioning	-	Tension bolts fitted to tail drum slide bearings
Belt scraper	-	Fitted under head drum
Transfer load capacity		250 Kg. cm ²

1.4 CEMENT WEIGH HOPPERS

Capacity	-	Load cell mounted cement hopper cap. 2 m3.
Load cells	-	1100 kg. Shear beam type - 3 nos.
Plate thickness	-	5 mm steel plate
Discharge doors	-	300 mm pneumatically operated butterfly valves with On-Off limit switch
Vibrator	-	0.25 HP vibrating motor
Total inlets	-	Two for optional customer supply flyesh silo / feed screw

1.5 WATER WEIGH HOPPER

Reg. Off.: Block no.97,
Mehsana-Ahmedabad Highway,
B/h.Bhupendra House,
At & Po. Ditasan-382710,
Dist. Mehsana.[Gujarat] INDIA.

✉: contact@atlastechnologiesindia.com
🌐: www.atlastechnologiesindia.com



Capacity	-	Load cell mounted water tank cap. 1.2 m3
Load cells	-	750 kg. Shear beam type – 3 nos.
Plate thickness	-	5 mm mild steel plate
Discharge valve	-	150 mm pneumatically operated butterfly valve with On-Off switch

1.6 ADDITIVE WEIGH HOPPER

Capacity	-	20 Kg. load cell mounted
Load cells	-	50 kg. "S " type - 1 no.
Material	-	5 mm thick and transparent acrylic dispenser.
Discharge valve	-	Spherical valve operated via actuator

1.7 TWIN SHAFT MIXER (4500/3000) – BHS OR SICOMA MAKE

- VIBRATED MATERIAL YIELD 3000 LITRES PER CYCLE
- WITH AUTOMATIC DISCHARGE DOOR, HYDRAULIC OPENING
- WITH EMERGENCY MANUAL PUMP FOR DISCHARGE DOOR OPENING
- WITH MIXING BLADES IN WEAR RESISTING CAST IRON (600HB)
- WITH SCRAPER BLADES IN WEAR RESISTING CAST IRON (600HB)
- WITH BOTTOM LINERS IN WEAR RESISTING CAST IRON (16mm TH) (500HB)
- WITH LATERAL LINERS IN WEAR RESISTING CAST IRON (12mm TH) (500HB)
- HYDRAULIC POWER PACK MOTOR 1 x 1.5kW
- AUTOMATIC GREASE PUMP
- DISCHARGE GATE THREE STAGES LIMIT SWITCHES
- INSPECTION HATCHWITH MESH GRILL AND SAFETY SWITCH
- JUNCTION BOXES FOR POWER SUPPLY AND CONTROL
- MIXING BLADE, 6 SETS
- SCRAPER BLADE, 4 SETS
- MIXING ARM, 10 SETS
- ARMS 90 DEGREE
- SANDBLASTING, UNDERCOAT PRIMER AND FINISH PAINT
- SINGLE OR DOUBLE ELECTRIC MOTOR 415 V, 3PH, 50HZ
- PLATFORM STEP

1.8 PNEUMATICS

Reg. Off.: Block no.97,
Mehsana-Ahmedabad Highway,
B/h.Bhupendra House,
At & Po. Ditasan-382710,
Dist. Mehsana.[Gujarat] INDIA.

✉: contact@atlastechnologiesindia.com
🌐: www.atlastechnologiesindia.com



- | | | |
|------------|---|---|
| Compressor | - | 15 HP to give 10 Kg. Pressure with 45.8 CFM of piston displacement. |
| Pneumatics | - | Cylinder, Solenoid valves, nylon pipe work and fittings |

1.9

CONTROL CABIN

- | | | |
|--------------|---|---|
| Type | - | Fixed control cabin with four legs size 2000 mm x 2500 mm. |
| Construction | - | Corrugated sheet steel cladding and folds into under frame for transport |
| Base frame | - | Constructed from rolled steel section |
| Roof | - | Sheet steel. Roof void fully insulated with 50mm thermocol sheet. |
| Floor | - | Wooden floor with carpet. |
| Walls | - | Clad internally with decorative boarding. Walls fully insulated with 50mm mineral wool. |
| Windows | - | Three sides |
| Lighting | - | Overhead LED fitted. |
| Heating | - | Air conditioning unit (Optional) |
| Door | - | Wide access door with door closer and lock |
| Power | - | Access from bottom of panel |

1.10

PLATFORMS

- | | | |
|-----------|---|--|
| Platforms | - | Maintenance platform for ease of access to mixer and weigh hoppers, with hand railing and access ladders |
|-----------|---|--|

1.11

UNDER FRAME

- | | | |
|----------------|---|--|
| Under frame | - | Fabricated rolled steel section chassis |
| Support jacks | - | Fixed supports under mixer |
| Loading height | - | 4.2 meter clearance under mixer outlet chute |

2

100 T CEMENT SILO (OPTIONAL)

Reg. Off.: Block no.97,
Mehsana-Ahmedabad Highway,
B/h.Bhupendra House,
At & Po. Ditasan-382710,
Dist. Mehsana.[Gujarat] INDIA.

✉: contact@atlastechnologiesindia.com
🌐: www.atlastechnologiesindia.com



- 2.1 100 Ton Capacity Silo for Cement** With fabricated 4 Column, Cross Bracings, Railing at Top, Climbing Ladder, Seamless Pipe (Dia: 100 mm Seamless pipe for feeding material in silo), Aeration System at Bottom of cone & with other necessary filaments.

2.2 SILO ACCESSORIES (1 set)

Double Flange Butterfly Valve with Cast Iron Disc Dia. 300 mm and Manual Lever for above Butterfly valve	- One unit
Special Dust Collector for Silo Venting	- One unit
Level Indicator 115/230 V/AC Paddle type Rotating	- Two units
Pressure Safety Relief Valve M.O.C. – M– M.S.	- One unit
Vibrating Bin aerator - (1 set inclusive of below items)	
1" Two way valve with coil	- 1 no.
1" Filter regulator with gauge	- 1 no.
Bracket for FRL	- 1 no.
Manifold 1/2" female x 2 outlet.	- 1 no.
Reducer 1" male X 1/2" female.	- 1 no.
1" Nipple-- 3 Nos	
Straight connector 1/2" x 12mm OD	- 4 no.
Equal tee 12mm OD	- 2 no.
PU tube 12mm OD	- 10 Meter
Male elbow 3/8" X 12mm OD	- 4 no.

Transfer screws - 323 mm diameter with 10 meters length cement screw conveyor

3 SILO FEEDING SYSTEM (OPTIONAL)

3.1 Cement feeding compressor for bulker feeding

SPECIFICATION	
CAPACITY (FAD)	400(800 M3 / Hr)
PRESSURE	1.0 Kg. / Cm2.
MACHINE SPEED	1450 RPM
POWER AT SHAFT	38 K.W.
RECOMM. MOTOR	50 H.P. / 1450 RPM.
TYPE OF DRIVE	V – BELT
TYPE OF COOLING	AIR COOLED

Reg. Off.: Block no.97,
Mehsana-Ahmedabad Highway,
B/h.Bhupendra House,
At & Po. Ditasan-382710,
Dist. Mehsana.[Gujarat] INDIA.

✉: contact@atlastechnologiesindia.com
🌐: www.atlastechnologiesindia.com



PLANT CONTROL SYSTEM (Located in Cabin)

4

CONTROLS

4.1 CONTROL CABIN

Control panel
Glazed door

- Lockable IP55 cabinet with weather canopy
- Lockable glazed door protecting visible Instrumentation, controls and lamp indication

Panel isolator
Control voltage
Contactors

- 125A 3-pole door isolator
- 220volt/50 HZ control circuit
- Combination circuit breakers/contactors

4.2 CONTROL DESK

- Containing key switches for manual/auto control, manual Start/stop buttons and PLC weigh/mix control system

4.3 WEIGH/MIX

- Weighing and mixing control system comprising of:
Operator interface terminal with Siemens S7-1200 PLC
Automatic control of the batching process via English interface with unlimited recipe storage.
Printer supplied for production logging of essential data from each batch. Production data stored on non-volatile Compact Flash, accessible by USB cable.
Network port to allow remote viewing and control of the batching process on customers PC.
SCADA type control system with Wi-Fi internet attachment facility and also facility to operate plant by mobile / tablet.

Stationery Concrete Plant Motor List

<i>Item</i>	<i>Quantity</i>	<i>HP</i>	<i>Qty.</i>	<i>Power (HP)</i>
1	Twin shaft mixer	75	2	150
2	Weigh conveyor	25	1	25
3	Agg hopper vibrator	0.25	1	0.25
4	Charging Conveyor	40	1	40
5	Cement weigh hopper vibrator	0.25	1	0.25
6	Air compressor	15	1	15
7	Water pump	10	1	10
8	Additive motor	2	1	2
9	Hydraulic power pack	3	1	3
10	Screw conveyor 323 mm x 10 meters	30	2	60
11	Cement feeding system (Optional)	50	1	50
			TOTAL	355 HP

Reg. Off.: Block no.97,
Mehsana-Ahmedabad Highway,
B/h.Bhupendra House,
At & Po. Ditasan-382710,
Dist. Mehsana.[Gujarat] INDIA.

✉: contact@atlastechnologiesindia.com

🌐: www.atlastechnologiesindia.com



<i>Sr. No.</i>	<i>DESCRIPTION</i>	<i>MAKE</i>
1	Mixer gear box	Sicoma(Italy) OR BHS (Germany)
2	All other gear boxes	Bonfiglioli/Wam/Prashant/Transolo
3	Screw conveyor	WAM / IVA BULK
4	Motors	Hindustan/ Kirloskar / Crompton
5	Conveyor belt	MRF OR COMPERABLE
6	V belt	Fenner
7	Compressor	Ingersoll-Rand OR Indo Air
8	Pneumatics	SMC
9	Load cell	ASI OR KELLY OR SENSOTRONIC
10	Pedestal bearing	TR
11	Vibrating motors	Oli OR Macwel
12	Silo accessories	WAM OR IVA BULK
13	Water Pump	Kirloskar OR kebee

Note: We recommend you to buy gen set of 320 kva. For the plant

Main cable size: 120 sq. mm x 4 core armoured copper (2 Pcs.) Length depending on the
Distance between generators to control cabin.

Exclusions

Civil works, foundations etc

Mains power supply or generator (for usage of 380 KVA , 3 phases for grid and equivalent generator for power consumption on site)

Mains incoming cable or distribution board

Water supply and incoming pipework

Aggregate storage hopper grids

Site labour and carnage

Any item not specified

Warranty

The equipment is covered by guarantee under proper use, for faulty material or workman ship for a period of 12 month from the date of dispatch.

Consumable, electric components, rubber components and general wear and tear components are not covered under guarantee.

Purchaser shall inform supplier in writing, of any defect in equipment noticed during guarantee period. On receipt of purchaser's letter, supplier shall at his option, replace or repair free of cost the defective part supplied by him. In case repair is required to be done at works, purchaser shall send such defective part to the works after receiving supplier's confirmation.

Reg. Off.: Block no.97,
Mehsana-Ahmedabad Highway,
B/h.Bhupendra House,
At & Po. Ditasan-382710,
Dist. Mehsana.[Gujarat] INDIA.

✉: contact@atlastechnologiesindia.com

🌐: www.atlastechnologiesindia.com



ATLASTM
TECHNOLOGIES PVT. LTD.
CIN No.U72200GJ2009PTC056104

Cell : +91 09099 314000
+91 09099 414000

We are in no event be liable for any damages whatsoever (including special, incidental consequential, direct or indirect damages, for personal injury, loss of business profits, or any other pecuniary loss) arising out of the use of or inability to use the equipment.

Reg. Off.: Block no.97,
Mehsana-Ahmedabad Highway,
B/h.Bhupendra House,
At & Po. Ditasan-382710,
Dist. Mehsana.[Gujarat] INDIA.

✉: contact@atlastechnologiesindia.com
🌐: www.atlastechnologiesindia.com

MFG. OF ROAD & CIVIL CONSTRUCTION MACHINERY

Subject to Mehsana Jurisdiction