


BACKPLANE C96 (FX-SEND class)

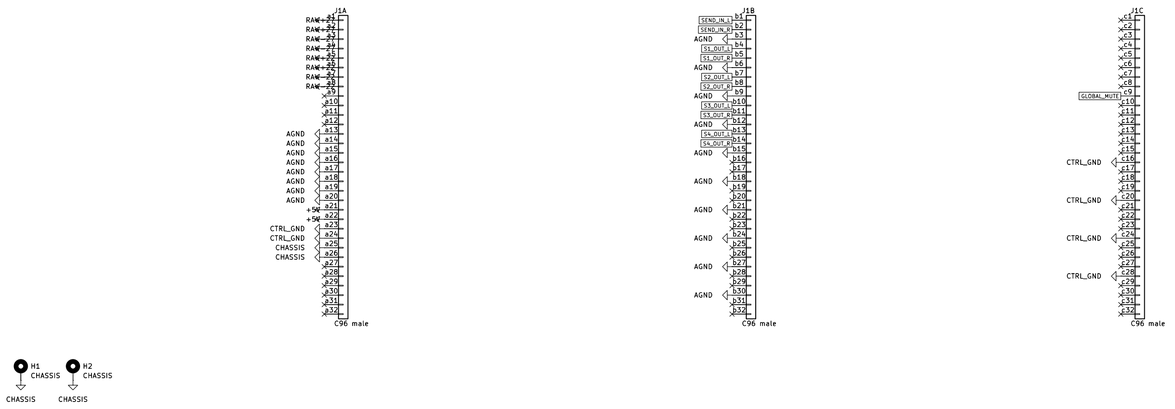


POWER +-18 audio, +-15 switch, +5

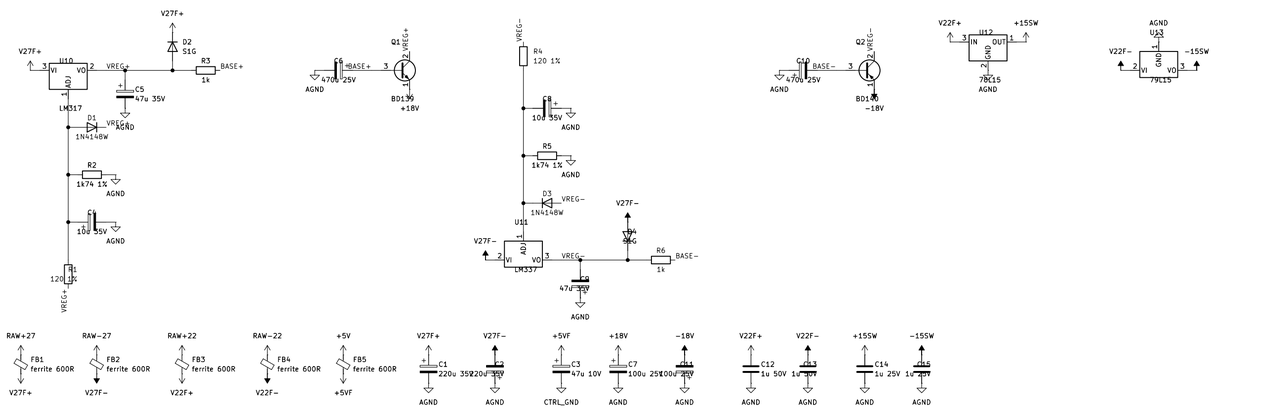


INPUT BUFFER (OPA1612)

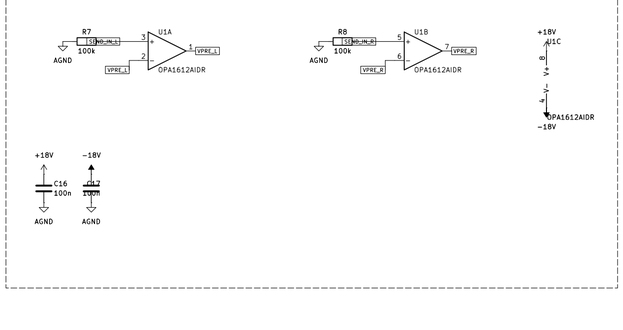


EQ2 left side (LOW 120 Hz + HIGH 4.5 kHz, fx-eq2-pot10k.cir)

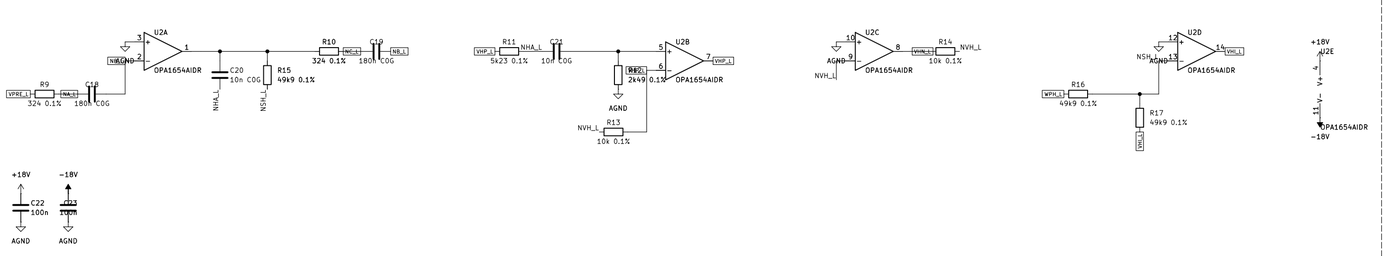


INJECTION left side (OPA1654 + 10k to the buses)

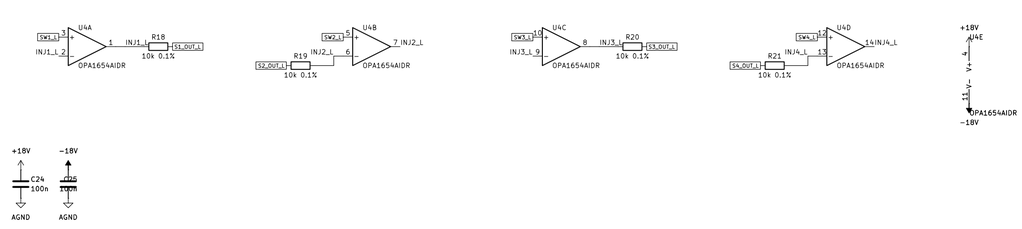

EQ2 right side (LOW 120 Hz + HIGH 4.5 kHz, fx-eq2-pot10k.cir)

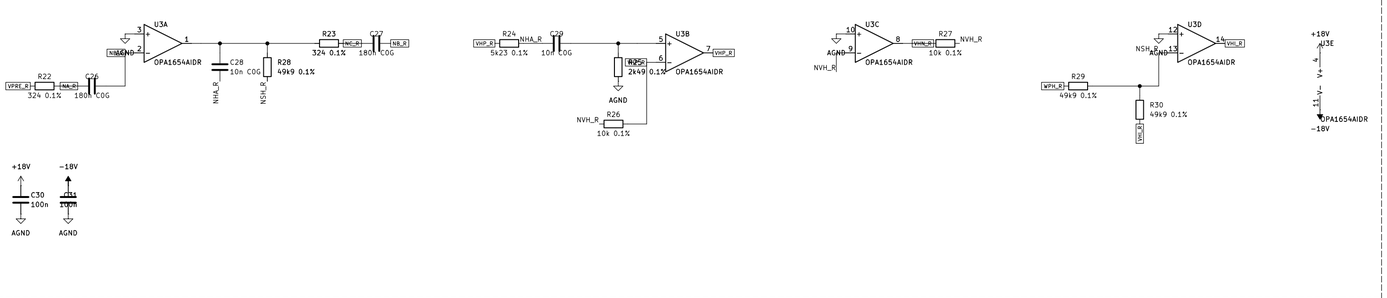

INJECTION right side (OPA1654 + 10k to the buses)

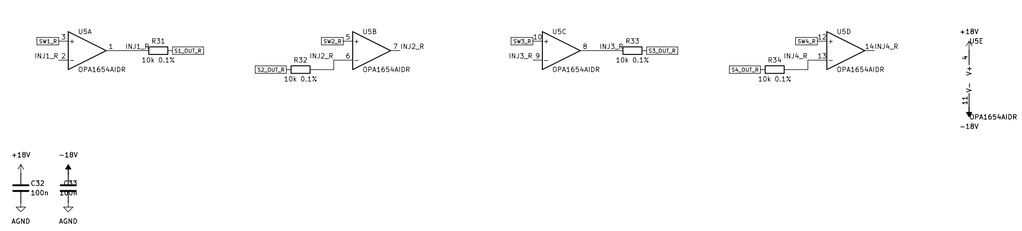

ASSIGN S1-S4 (ADG1434 pi SPDT, 1 ms soft switch, global mute)

CONTROL BOARD CABLE (J2) and ASSIGN BUTTONS (J3)

PWR_FLAG (for the ERC check only)

Generated by pcb/tools/leggibile.py from the same netlist as the PCB: do not edit by hand

Sheet: /
File: fx-send.kicad_sch

Title: maelcum FX-SEND (dec. 91a) — draft v0.2 — readable schematic

Size: User | Date: | Rev: 0.3-draft
KiCad E.D.A. 10.0.7 | Id: 1/1