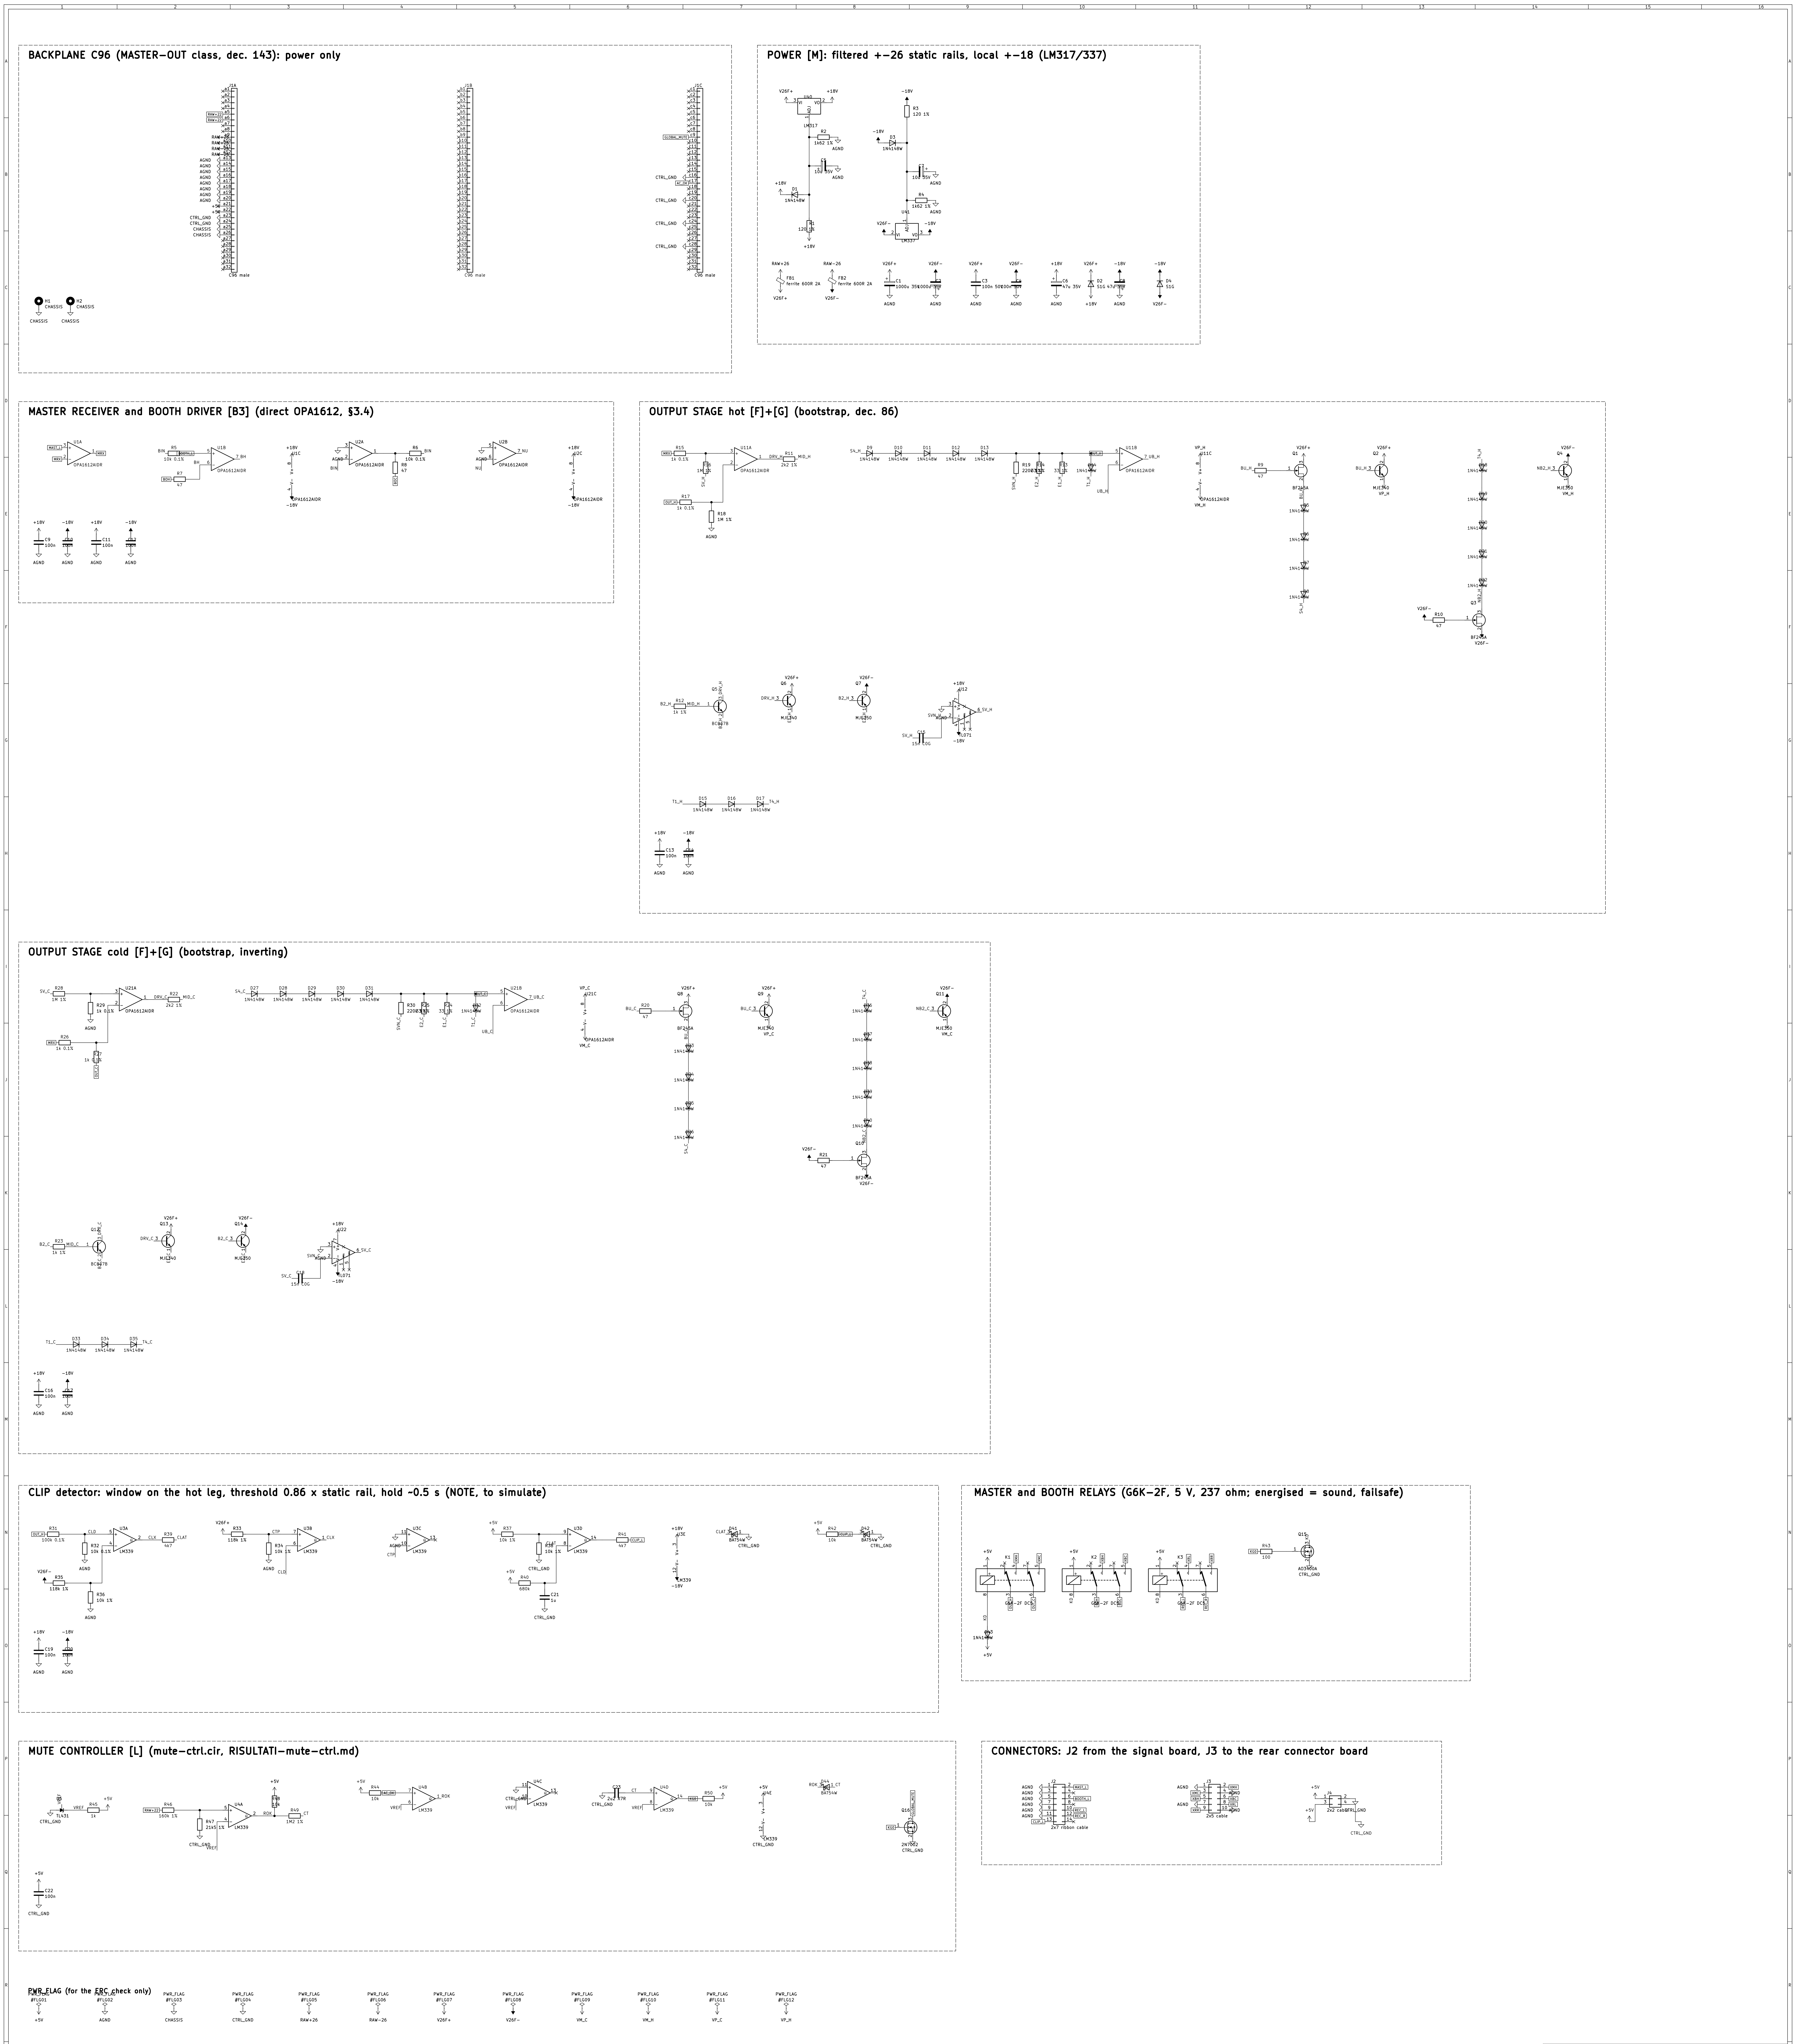
BACKPLANE C96 (MASTER–OUT class, dec. 143): power only
POWER [M]: filtered +–26 static rails, local +–18 (LM317/337)
MASTER RECEIVER and BOOTH DRIVER [B3] (direct OPA1612, §3.4)
OUTPUT STAGE hot [F]+[G] (bootstrap, dec. 86)
OUTPUT STAGE cold [F]+[G] (bootstrap, inverting)
CLIP detector: window on the hot leg, threshold 0.86 x static rail, hold ~0.5 s (NOTE, to simulate)
MASTER and BOOTH RELAYS (G6K–2F, 5 V, 237 ohm; energised = sound, failsafe)
MUTE CONTROLLER [L] (mute–ctrl.cir, RISULTATI–mute–ctrl.md)
CONNECTORS: J2 from the signal board, J3 to the rear connector board
PWR_FLAG (for the ERC check only)

Generated by pcb/tools/leggibile.py from the same netlist as the PCB: do not edit by hand

Sheet: /
File: master–uscita–L.kicad_sch

Title: maelcum MASTER OUTPUT board L (dec. 142–143) – draft v0.1 – reac

Size: User	Date:	**Rev: 0.1–draft**
KiCad E.D.A. 10.0.7		Id: 1/1