


BRIDGE from the signal board (J1) and local bulk caps

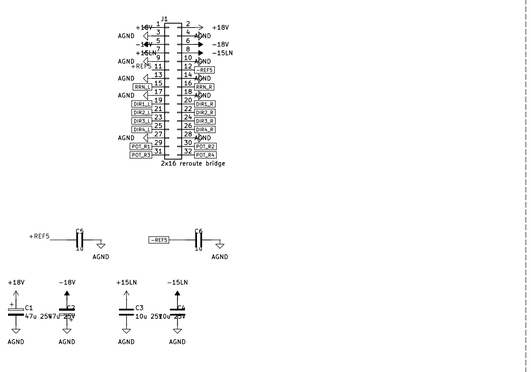


REROUTE to S1 (2 VCAs, I/V, inverting driver, reroute shaper, trim)

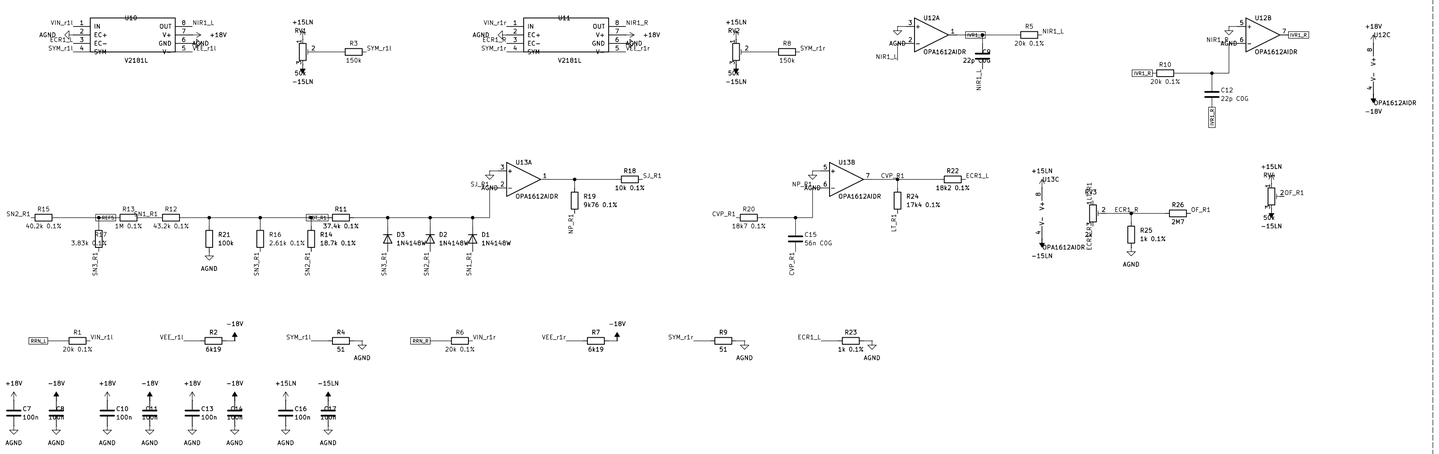


REROUTE to S2 (2 VCAs, I/V, inverting driver, reroute shaper, trim)

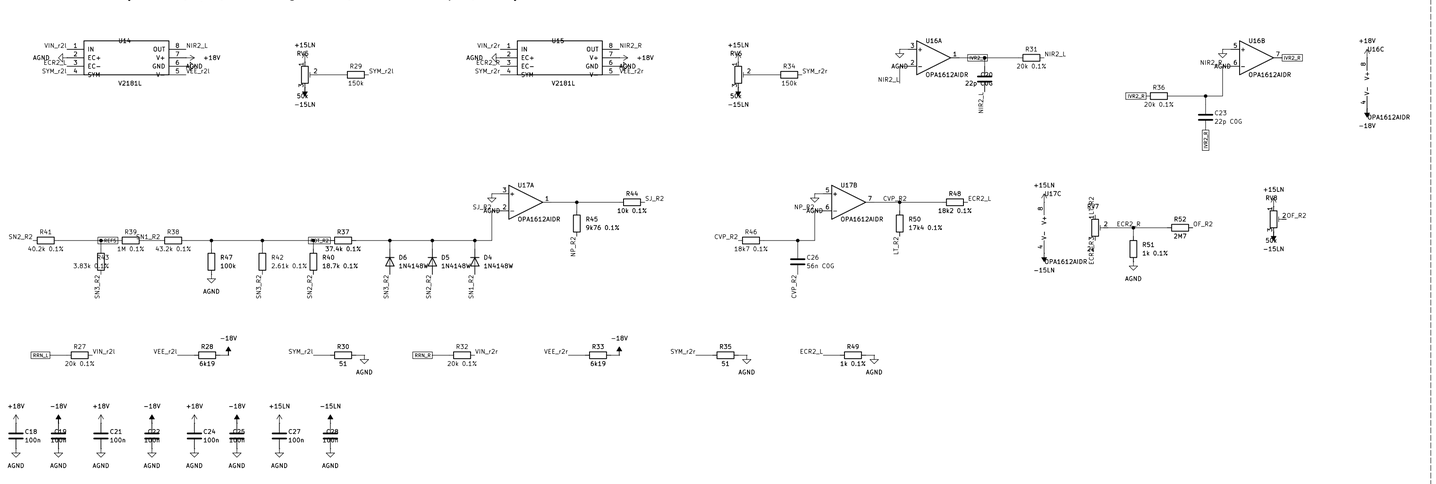


REROUTE to S3 (2 VCAs, I/V, inverting driver, reroute shaper, trim)

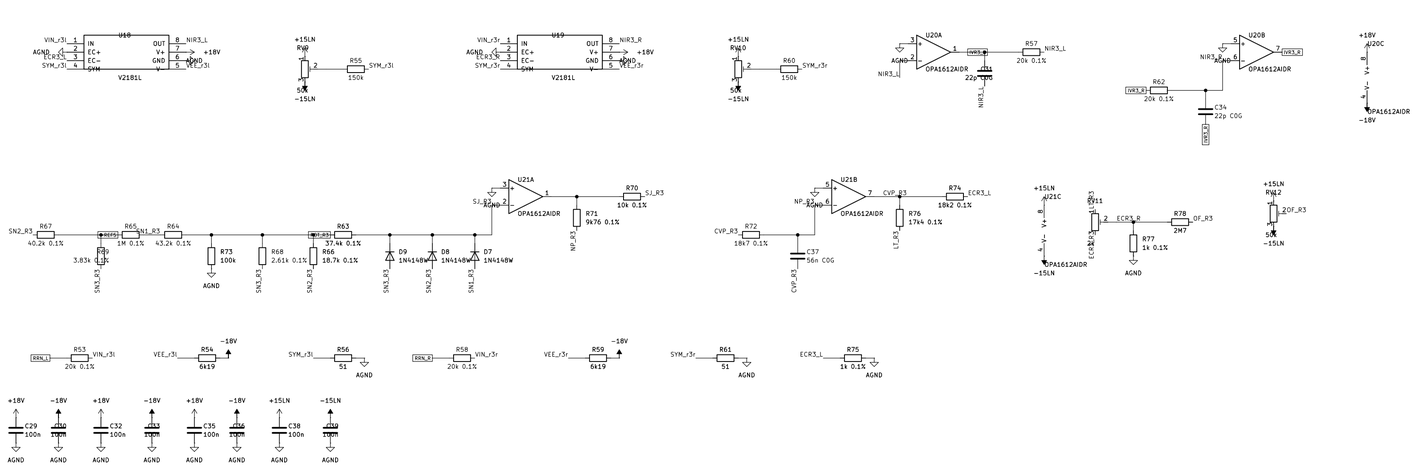

REROUTE to S4 (2 VCAs, I/V, inverting driver, reroute shaper, trim)

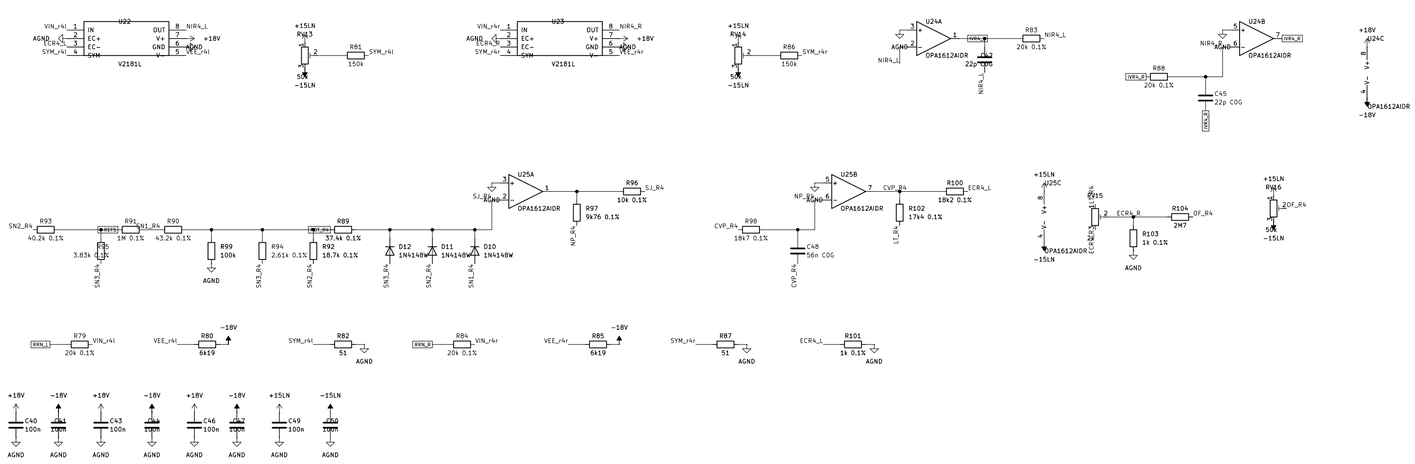

REROUTE INJECTION DRIVERS (2 OPA1654, inverting unity)

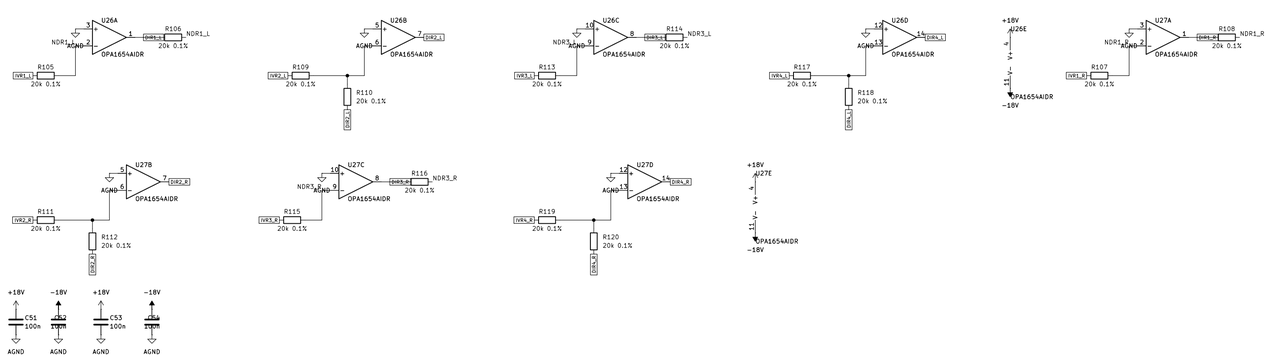

PWR_FLAG (for the ERC check only)



Generated by pcb/tools/leggibile.py from the same netlist as the PCB: do not edit by hand.

Sheet: /	
File: fx-ret-reroute.kicad_sch	
Title: maelcum FX-RET reroute (dec. 91) — draft v0.1 — readable schematic	
Size: User	Date:
KiCad E.D.A. 10.0.7	**Rev: 0.1-draft**
	Id: 1/1