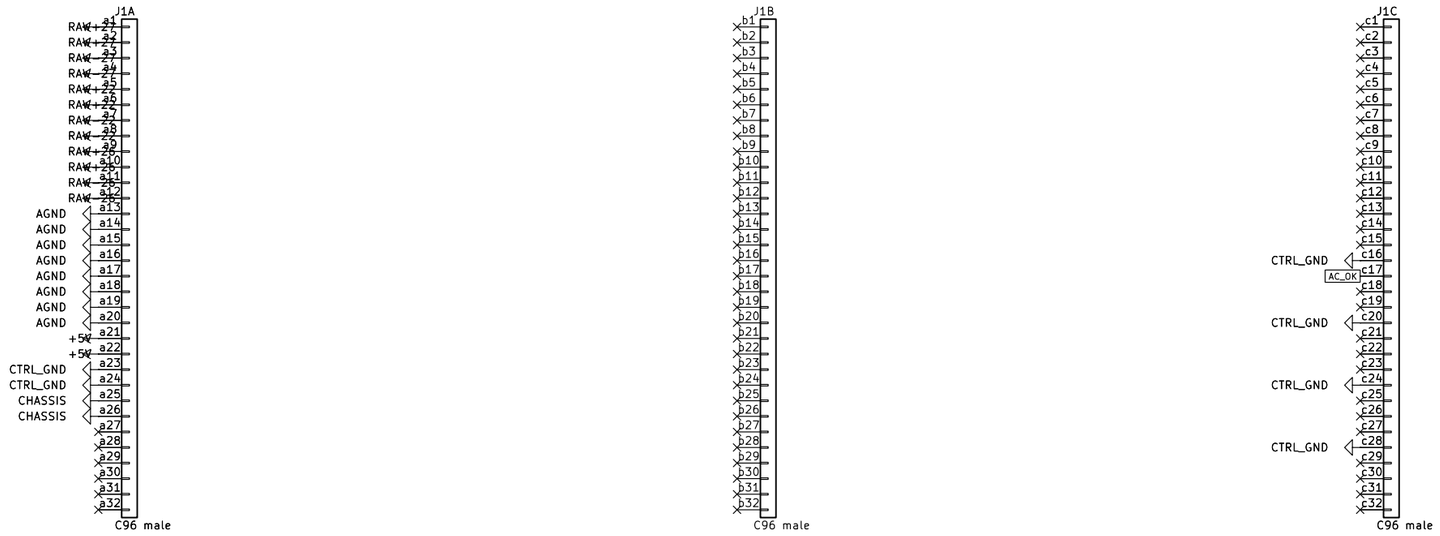

## BACKPLANE C96 (PSU-IN slot): whole row a, AC_OK on c17



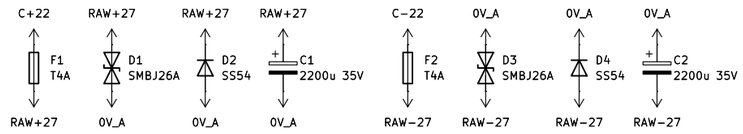




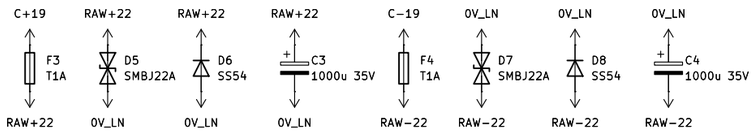
## CABLE FROM THE BOX (20 conductors, §3)



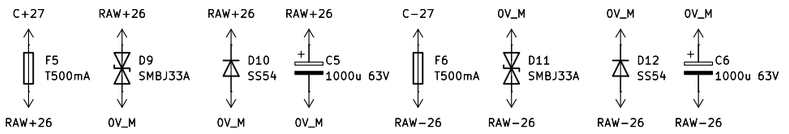

## AUDIO RAIL +-22.0 V (raw +-27 pins): T4 A, TVS 26 V, 2.2 mF



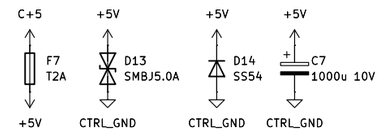

## LN RAIL +-19 V (raw +-22 pins): T1 A, TVS 22 V, 1 mF



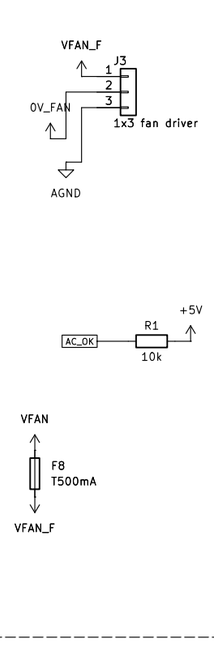

## RAIL [M] raw +-27 V (raw +-26 pins): T500 mA, TVS 33 V, 1 mF



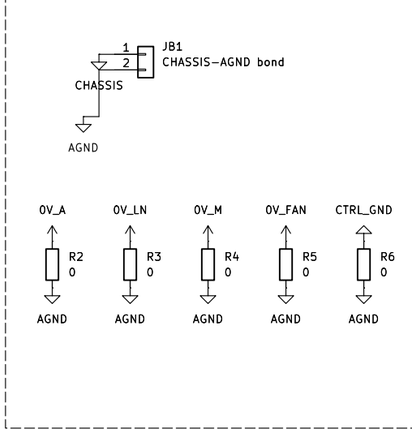

## RAIL +5 V: T2 A, TVS 5.0 V, 1 mF



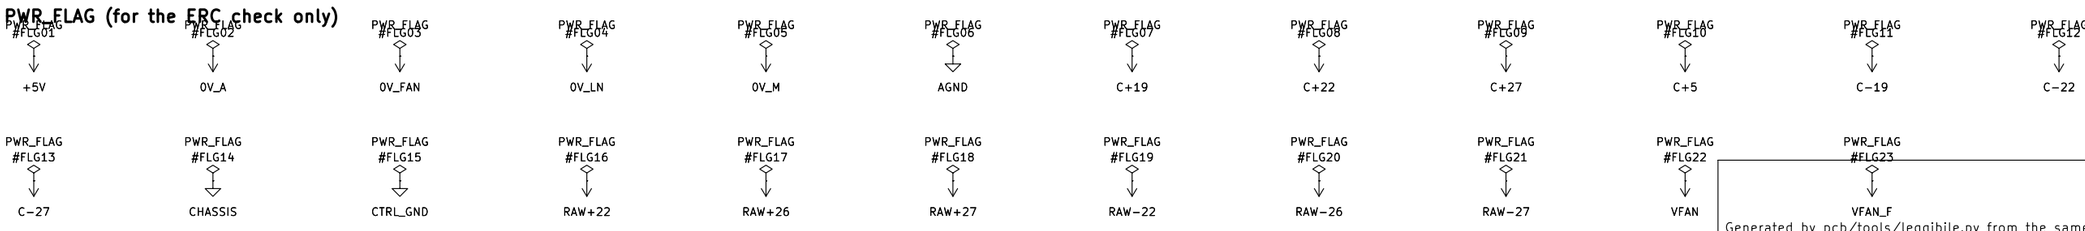

## V_FAN (T500 mA) and AC_OK




## analogue-0V STAR (§4.2, grounding §2)




## PWR_FLAG (for the ERC check only)




Generated by pcb/tools/leggibile.py from the same netlist as the PCB: do not edit by hand

Sheet: /
File: psu-in.kicad_sch

**Title: maelcum PSU-IN (dec. 113) — draft v0.1 — readable schematic**

| Size: User | Date: | Rev: 0.1-draft |
|---|---|---|
| KiCad E.D.A. 10.0.7 | | Id: 1/1 |