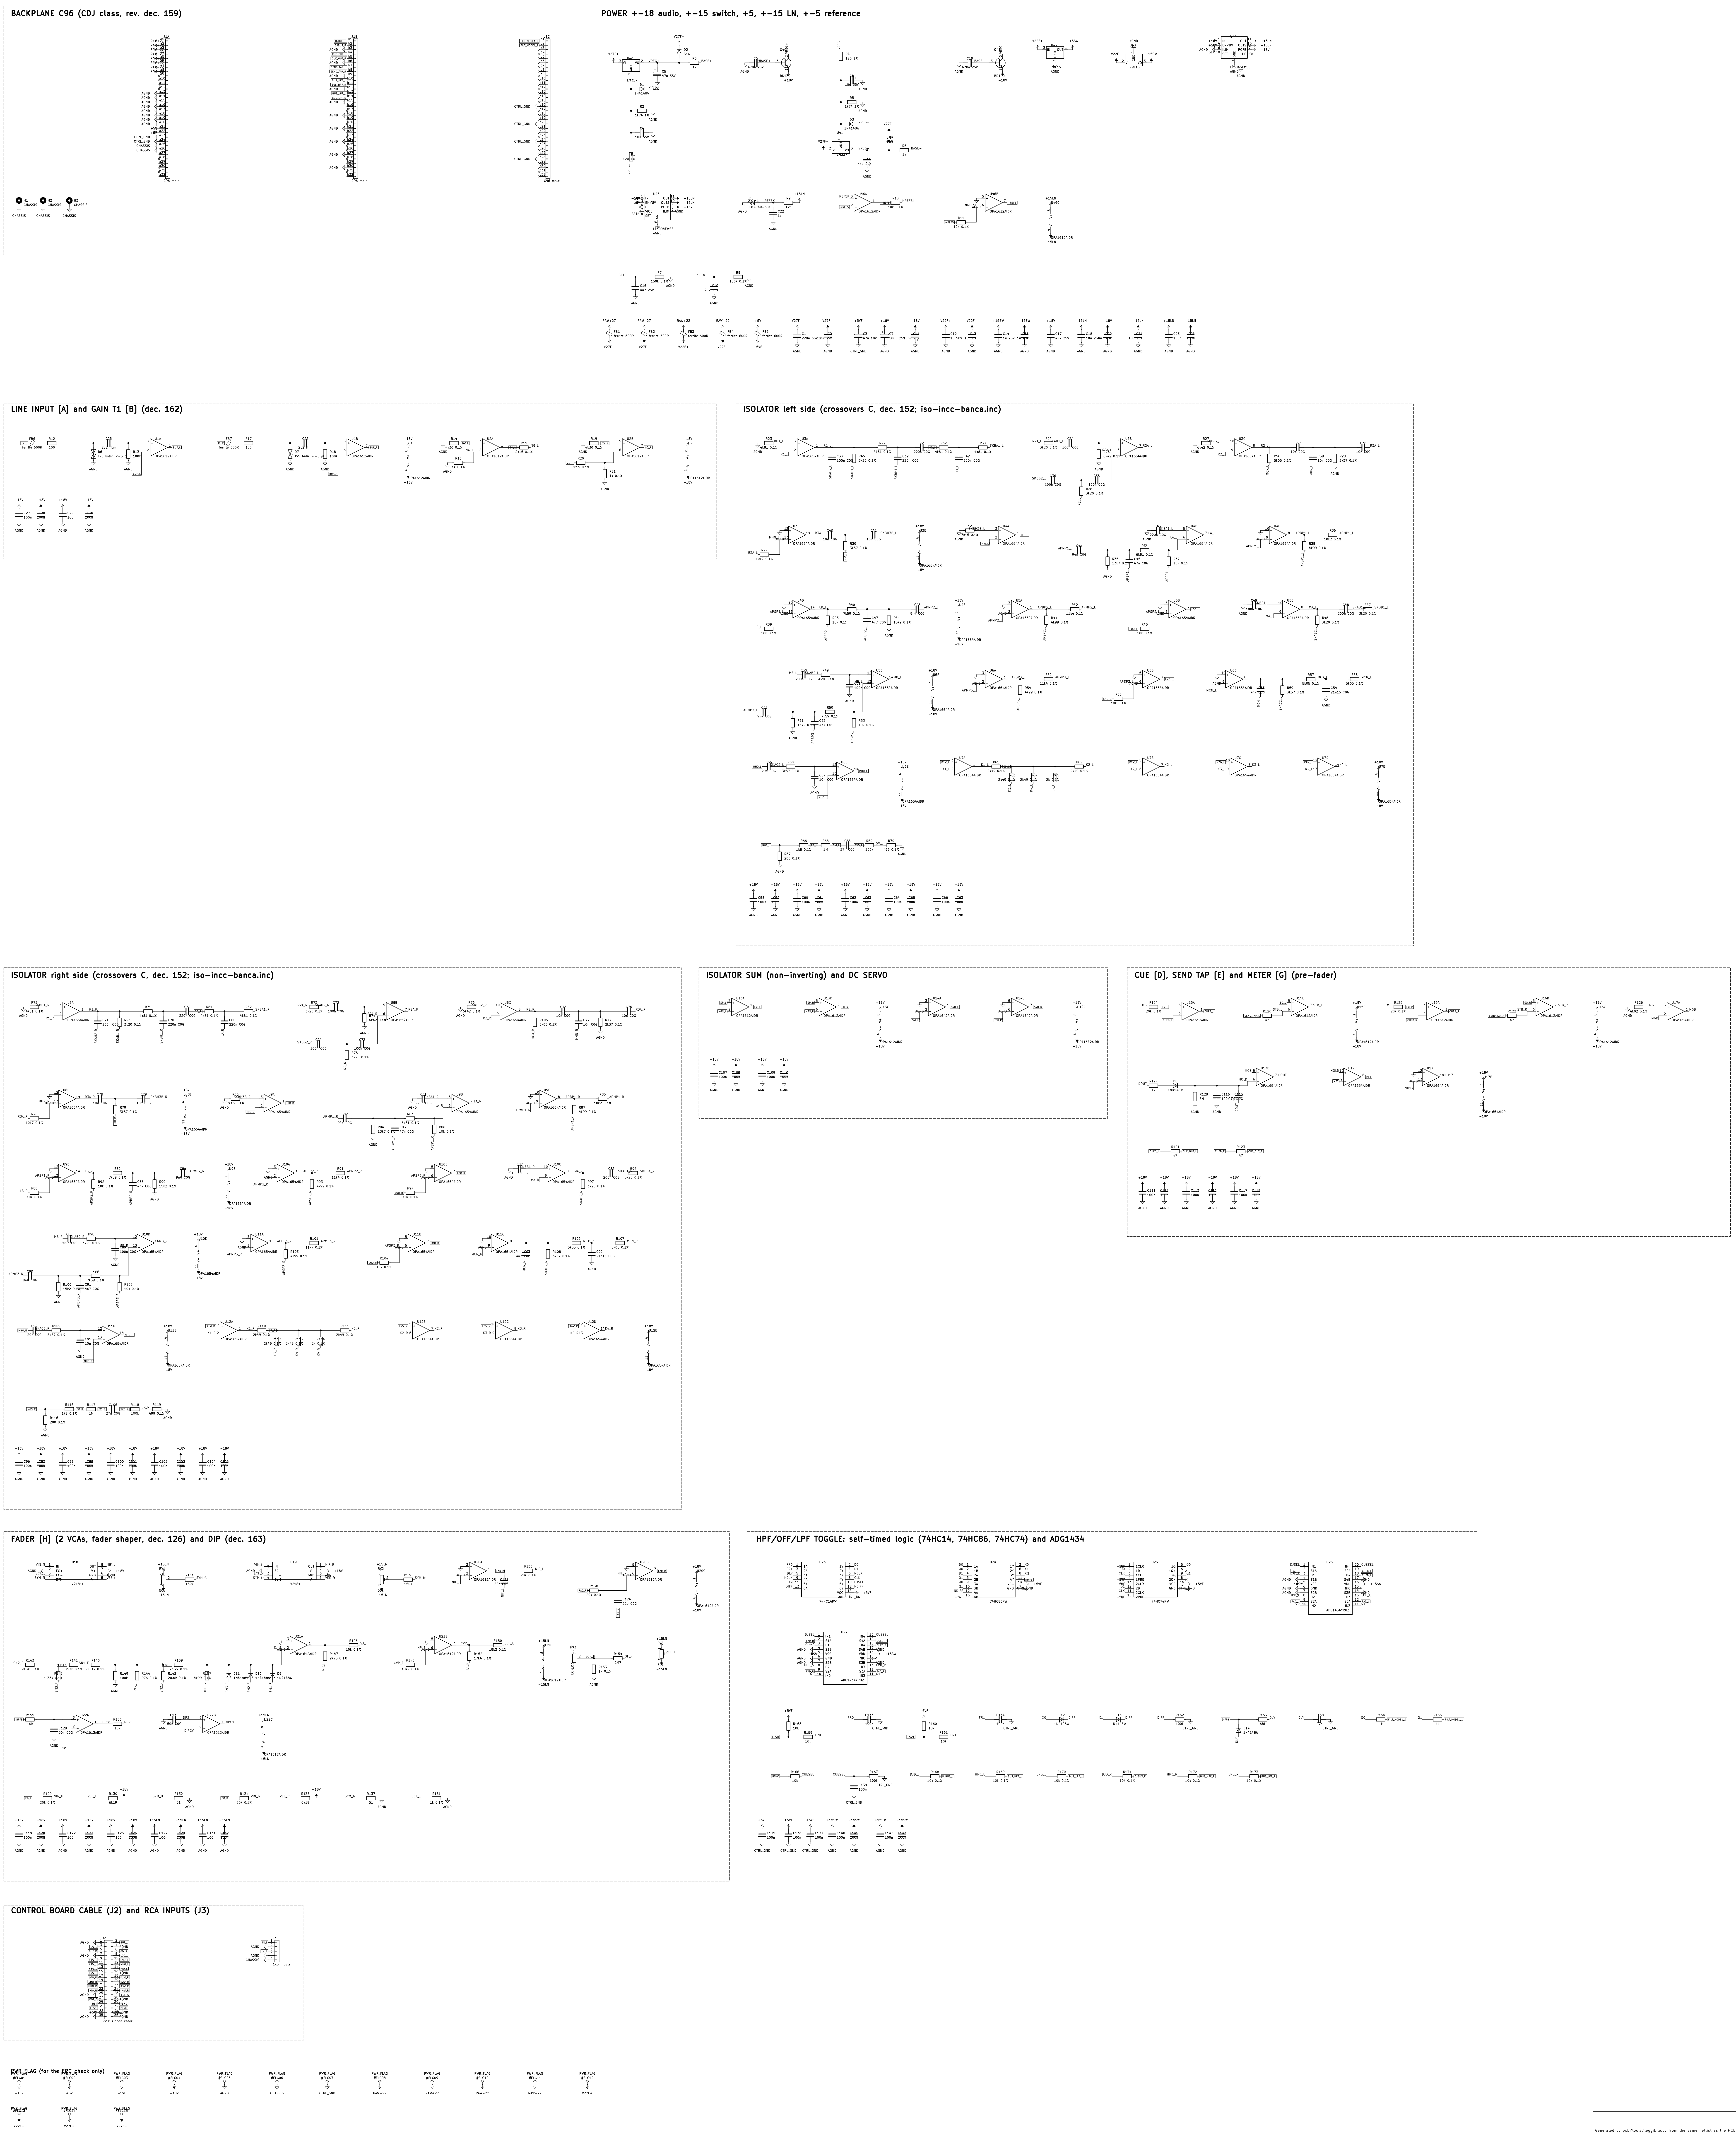
BACKPLANE C96 (CDJ class, rev. dec. 159)
POWER +−18 audio, +−15 switch, +5, +−15 LN, +−5 reference
LINE INPUT [A] and GAIN T1 [B] (dec. 162)
ISOLATOR left side (crossovers C, dec. 152; iso−lncc−banca.inc)
ISOLATOR right side (crossovers C, dec. 152; iso−lncc−banca.inc)
ISOLATOR SUM (non−inverting) and DC SERVO
CUE [D], SEND TAP [E] and METER [G] (pre−fader)
FADER [H] (2 VCAs, fader shaper, dec. 126) and DIP (dec. 163)
HPF/OFF/LPF TOGGLE: self−timed logic (74HC14, 74HC86, 74HC74) and ADG1434
CONTROL BOARD CABLE (J2) and RCA INPUTS (J3)
2x18 ribbon cable
1x5 inputs
PWR_FLAG (for the ERC check only)

Generated by pcb/tools/leggibile.py from the same netlist as the PCB: do not edit by hand

Sheet: /
File: canale.kicad_sch

Title: maelcum CHANNEL CDJ/LINE (v0.4) – draft v0.1 – readable schematic

Size: User	Date:	**Rev: 0.2–draft**
KiCad E.D.A. 10.0.7		Id: 1/1