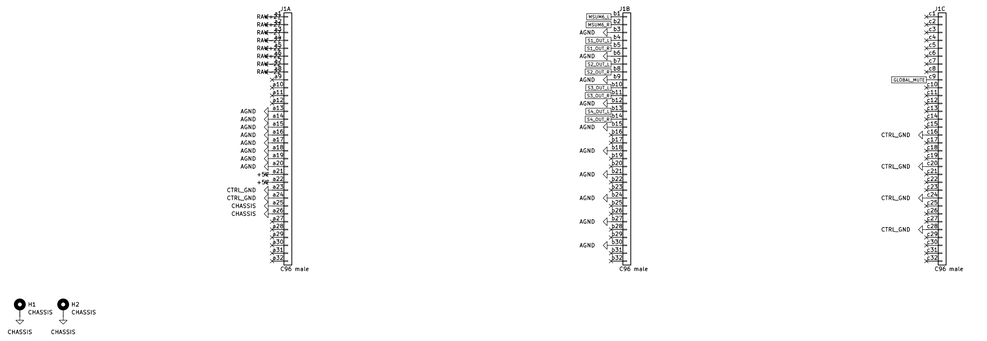
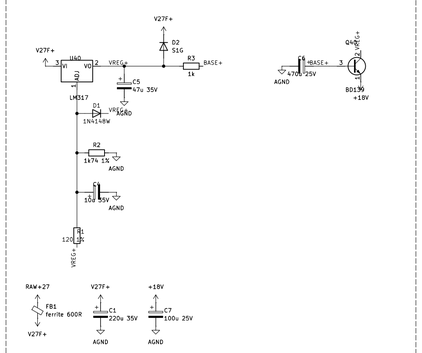
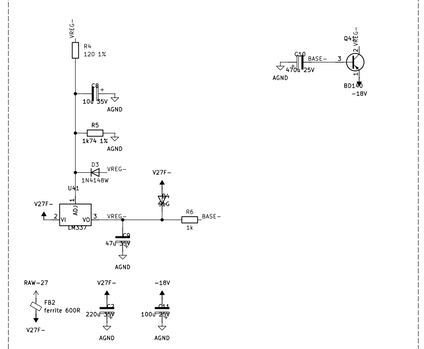
## BACKPLANE C96 (MIC/GEN class, MSUM6)





## POWER: +18V (LM317 + BD139)





## POWER: −18V (LM337 + BD140)





## POWER: +15SW (78L15)



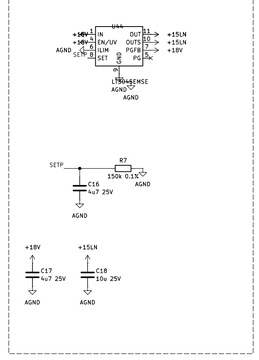

## POWER: −15SW (79L15)



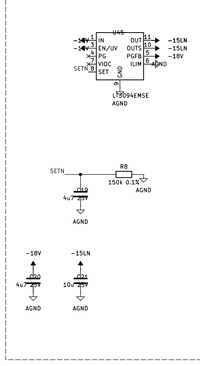

## POWER: +5VF



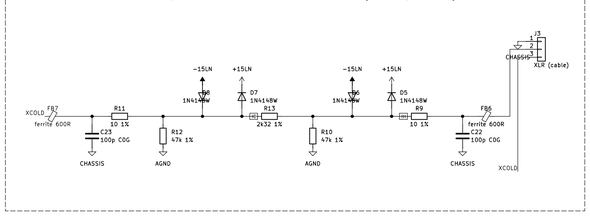

## POWER: +15LN (LT3045)



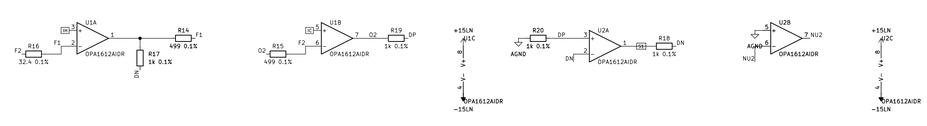

## POWER: −15LN (LT3094)



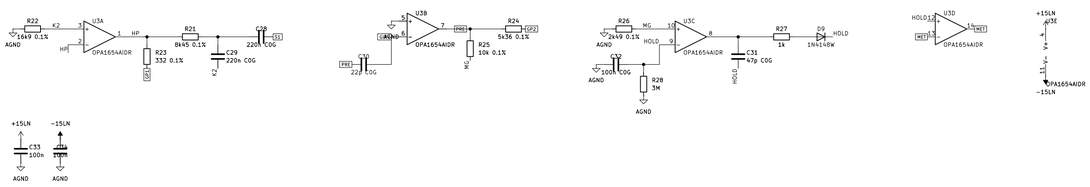

## XLR INPUT: RFI, clamp, 2.32k load, 2x47k bias (mic−pre.inc)



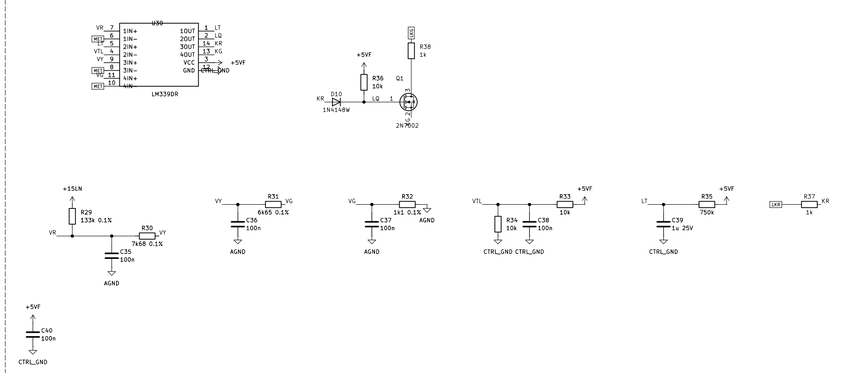

## INA +30.05 dB and unity differential (OPA1612)



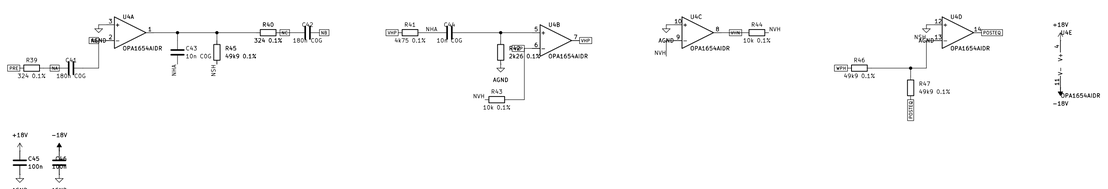

## HIGH−PASS 60 Hz, STAGE 2 (0...+30 dB), LED DETECTOR (OPA1654)



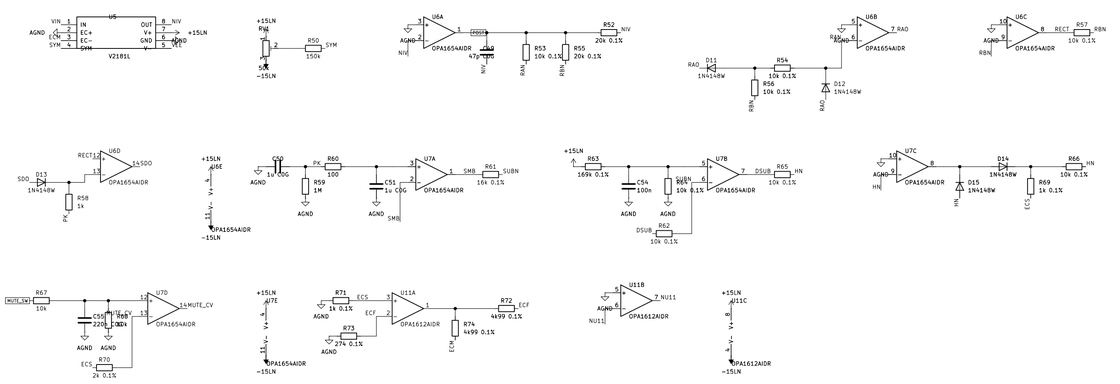

## Three−colour LED (LM339)



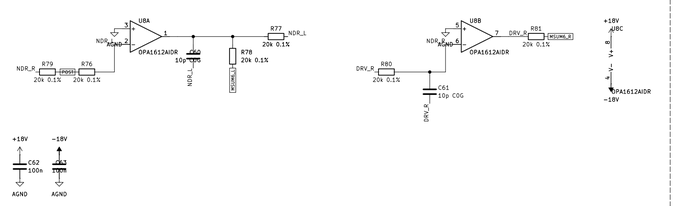

## EQ2 (+−18)



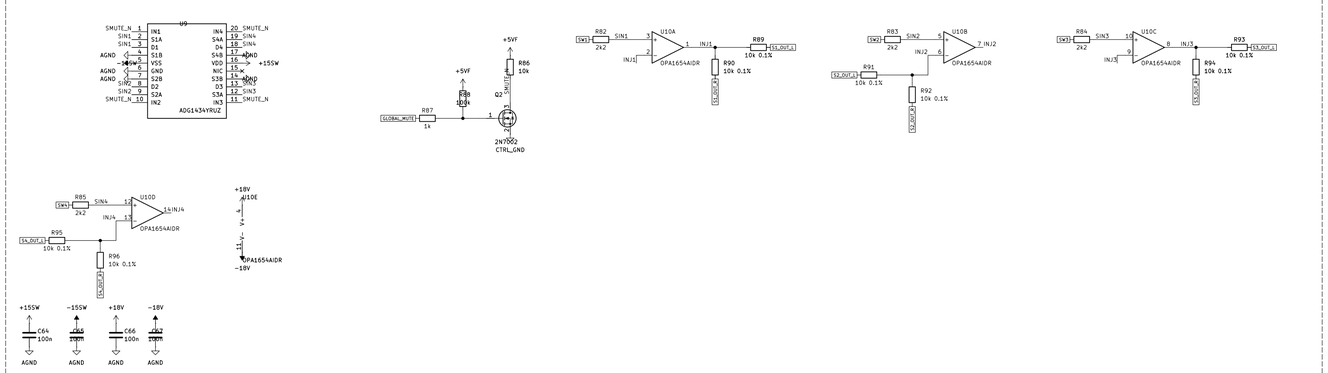

## MUTE and limiter VCA (dec. 111, 145; sim/mic/mic−limiter.cir)





## MSUM6 L/R DRIVERS (inverting, todo 227)




## SENDS S1−S4 (pots on the cable, global mute, injection)




## CONTROL BOARD CABLE (J2)




## PWR_FLAG (for the ERC check only)




Generated by pcb/tools/leggibile.py from the same netlist as the PCB: do not edit by hand

Sheet: /
File: mic.kicad_sch

**Title: maelcum MIC (dec. 97) — draft v0.1 — readable schematic**

| Size: User | Date: | Rev: 0.1−draft |
|---|---|---|
| KiCad E.D.A. 10.0.7 | | Id: 1/1 |