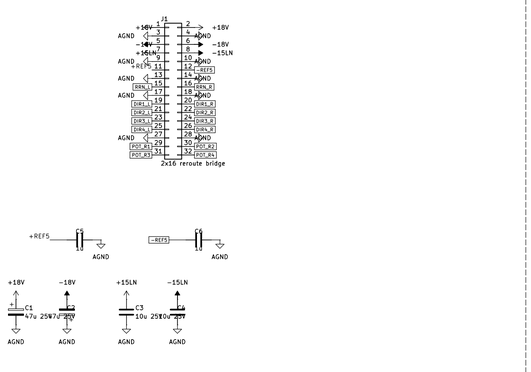
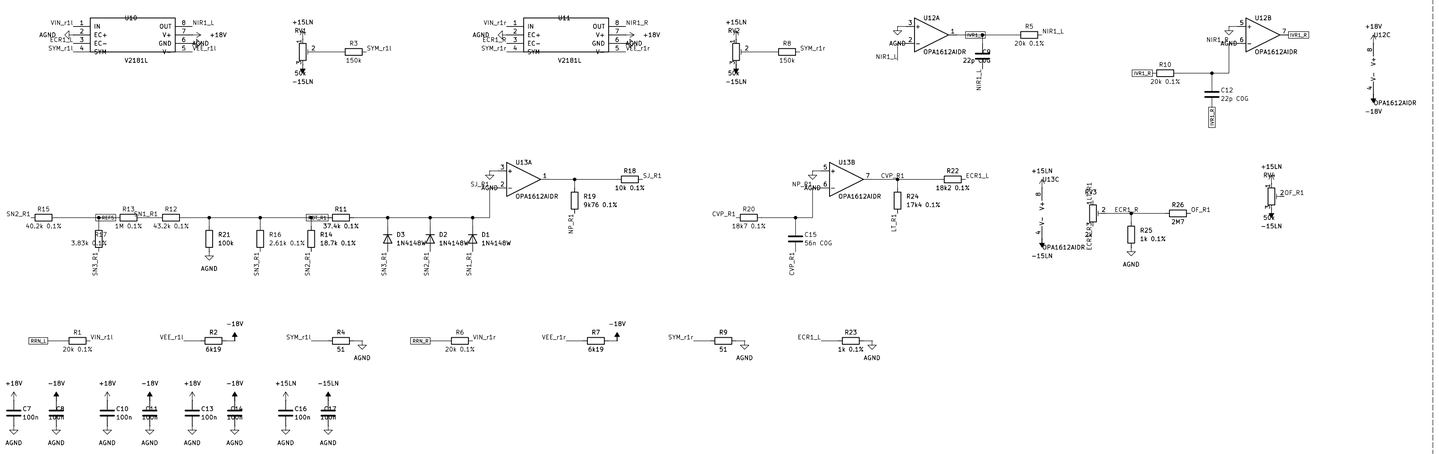
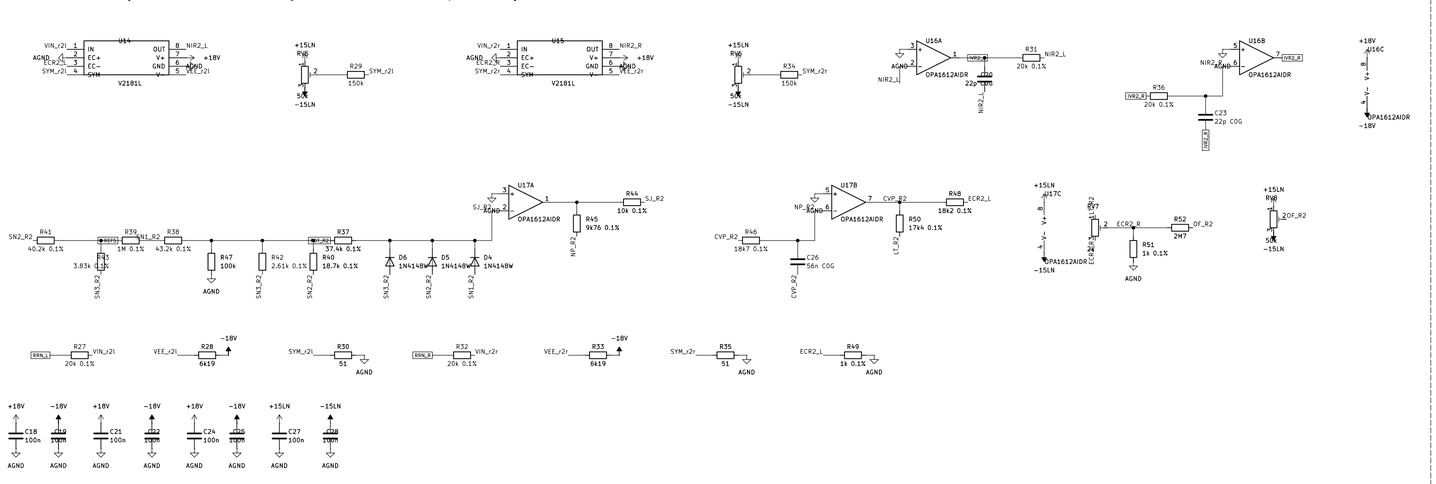
## BRIDGE from the signal board (J1) and local bulk caps



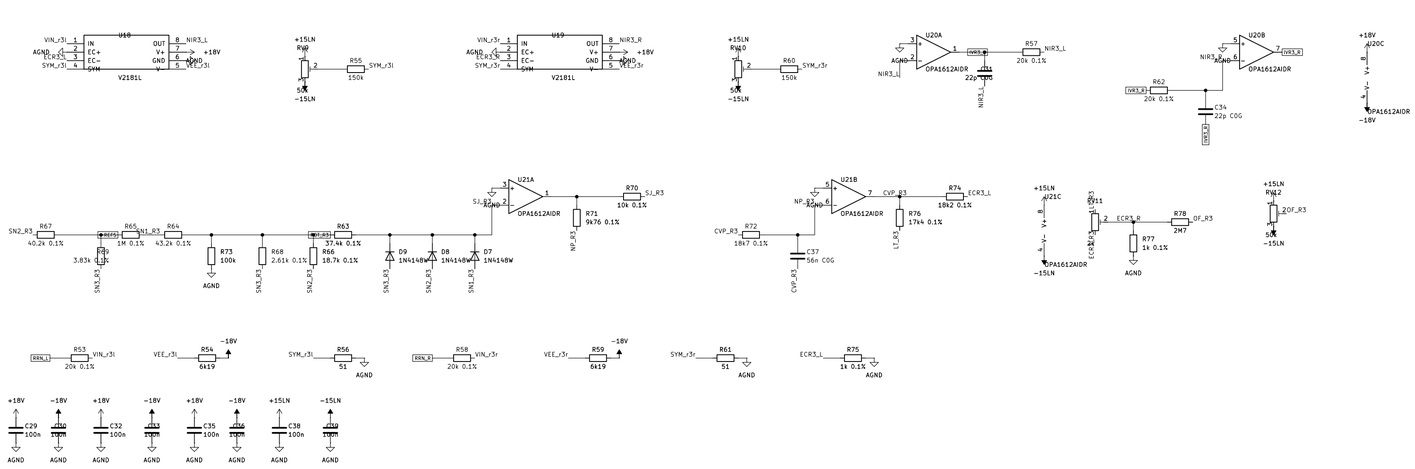

## REROUTE to S1 (2 VCAs, I/V, inverting driver, reroute shaper, trim)



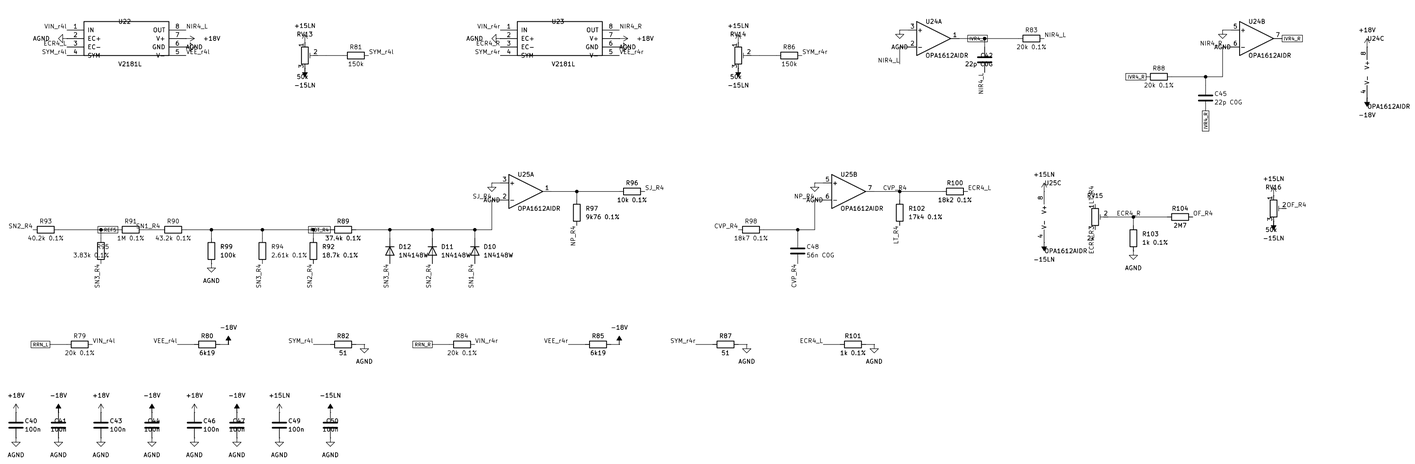

## REROUTE to S2 (2 VCAs, I/V, inverting driver, reroute shaper, trim)



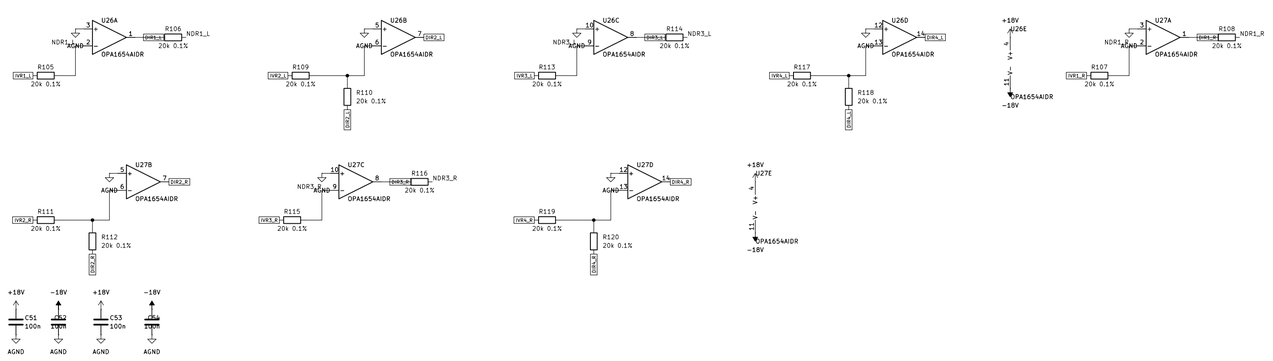

## REROUTE to S3 (2 VCAs, I/V, inverting driver, reroute shaper, trim)




## REROUTE to S4 (2 VCAs, I/V, inverting driver, reroute shaper, trim)




## REROUTE INJECTION DRIVERS (2 OPA1654, inverting unity)




**PWR_FLAG (for the ERC check only)**




Generated by pcb/tools/leggibile.py from the same netlist as the PCB: do not edit by hand.

| | |
|---|---|
| Sheet: / | |
| File: fx-ret-reroute.kicad_sch | |
| **Title: maelcum FX-RET reroute (dec. 91) — draft v0.1 — readable schematic** | |
| Size: User | Date: |
| KiCad E.D.A. 10.0.7 | **Rev: 0.1-draft** |
| | Id: 1/1 |