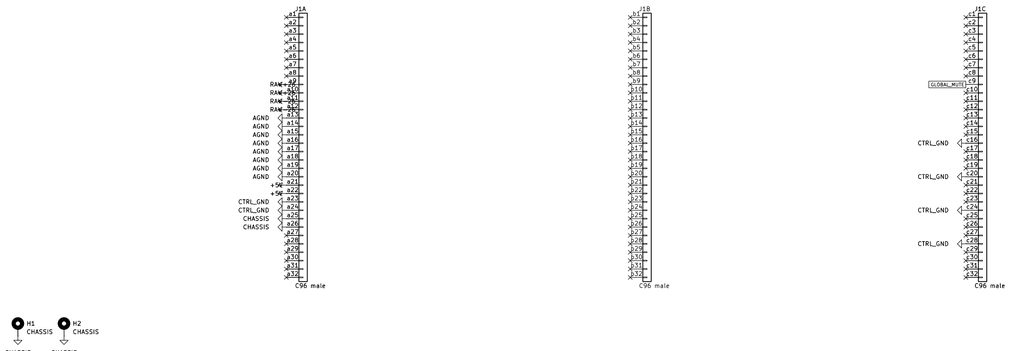
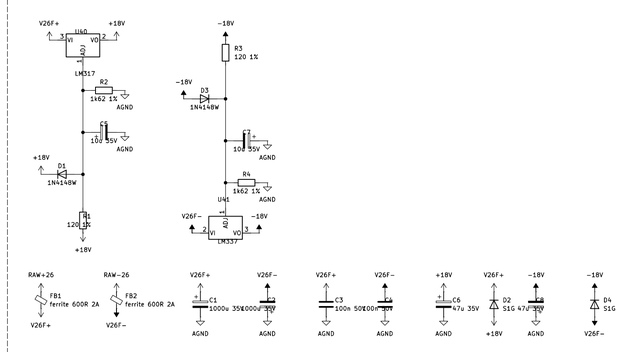
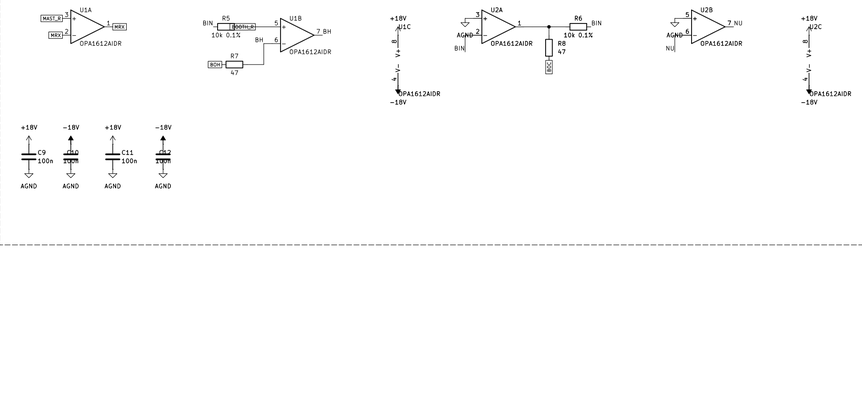
## BACKPLANE C96 (MASTER-OUT class, dec. 143): power only



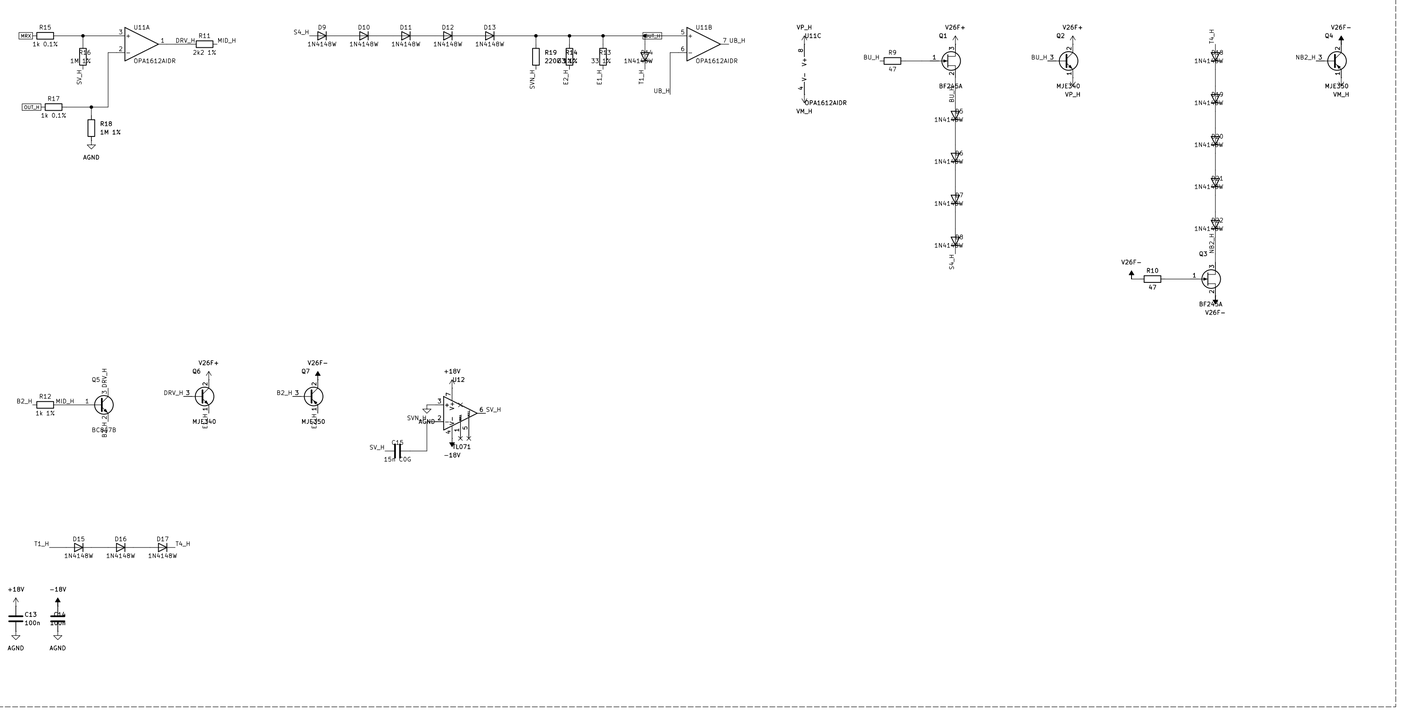

## POWER [M]: filtered +-26 static rails, local +-18 (LM317/337)



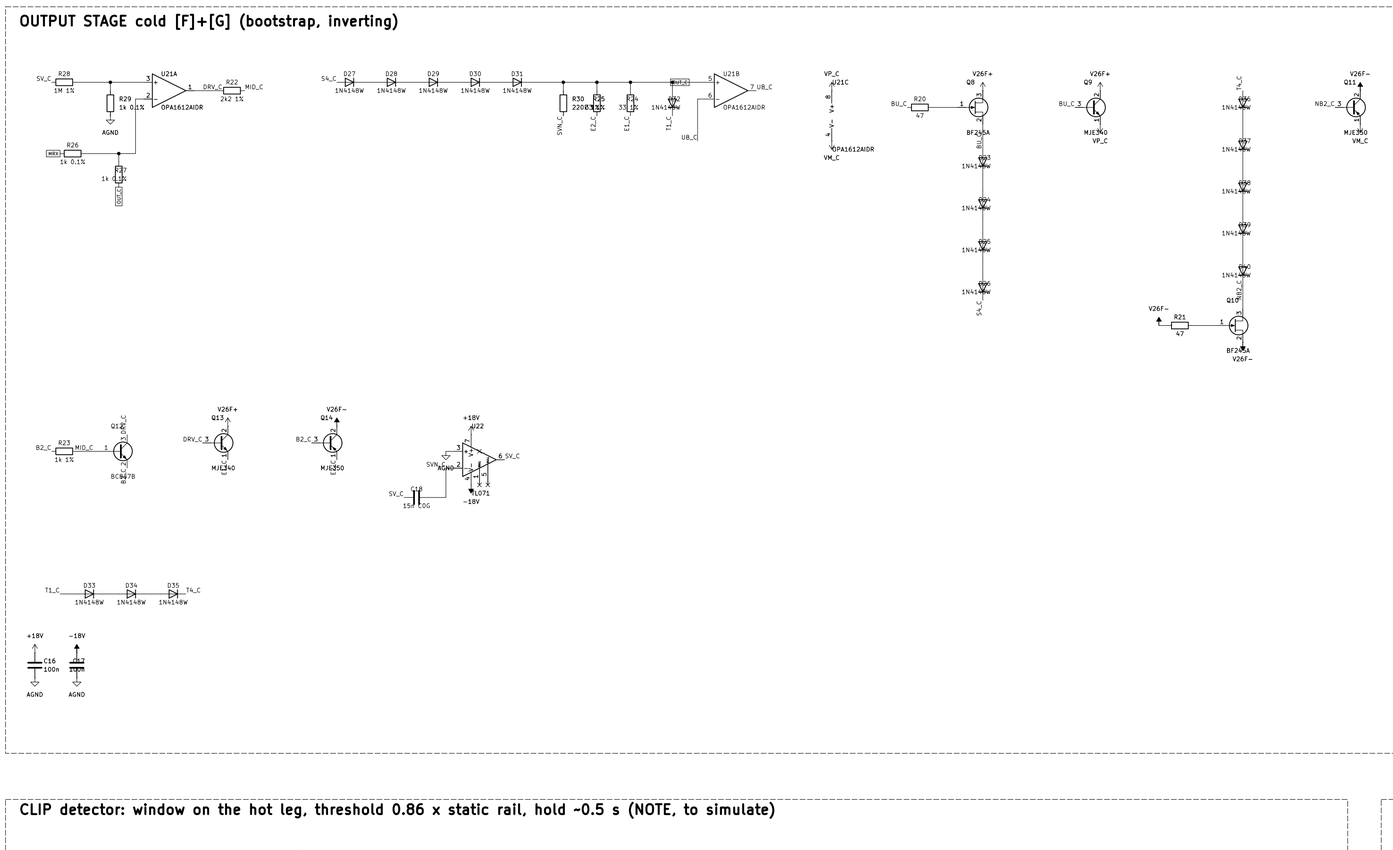

## MASTER RECEIVER and BOOTH DRIVER [B3] (direct OPA1612, §3.4)



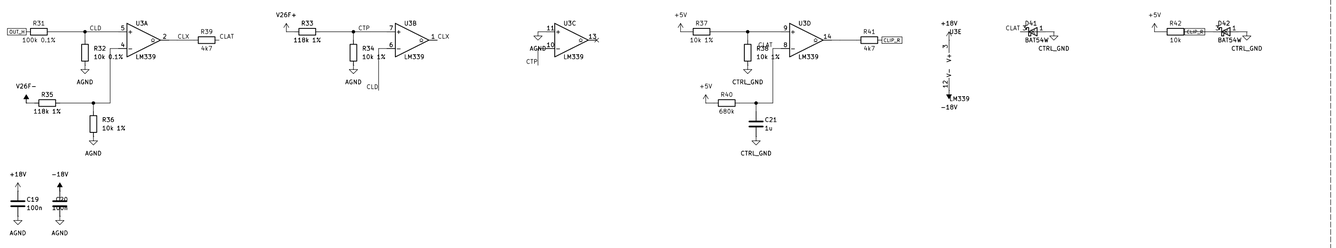

## OUTPUT STAGE hot [F]+[G] (bootstrap, dec. 86)



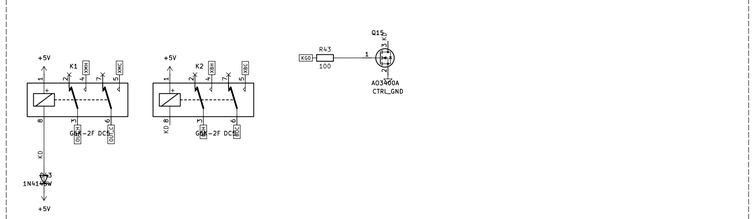

## OUTPUT STAGE cold [F]+[G] (bootstrap, inverting)



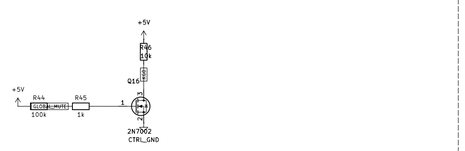

## CLIP detector: window on the hot leg, threshold 0.86 x static rail, hold ~0.5 s (NOTE, to simulate)




## MASTER and BOOTH RELAYS (G6K-2F, 5 V, 237 ohm; energised = sound, failsafe)




## RELAY DRIVE from GLOBAL_MUTE (c9): low = sound




## CONNECTORS: J2 from the signal board, J3 to the rear connector board




## PWR_FLAG (for the ERC check only)




Generated by pcb/tools/leggibile.py from the same netlist as the PCB: do not edit by hand

Sheet: /
File: master-uscita-R.kicad_sch

**Title: maelcum MASTER OUTPUT board R (dec. 142-143) - draft v0.1 - rea**

| Size: User | Date: | Rev: 0.1-draft |
|---|---|---|
| KiCad E.D.A. 10.0.7 | | Id: 1/1 |