


BACKPLANE C96 (CUE class: slots 1–4 = CUE1–4 in, slot 5 = MON in)

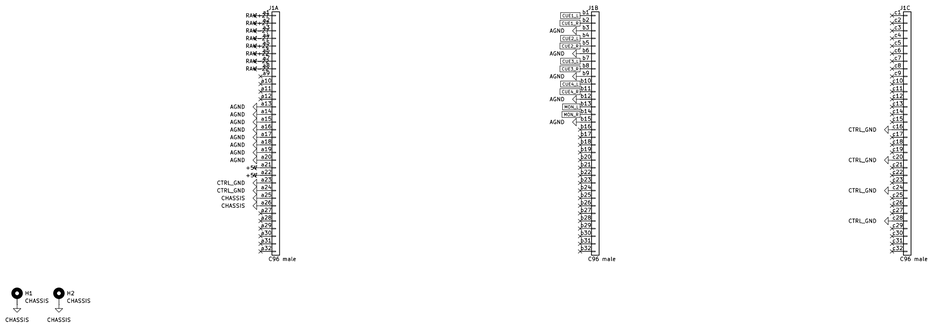


POWER +18 audio (LM317 from raw +27, 1000 uF bulk)

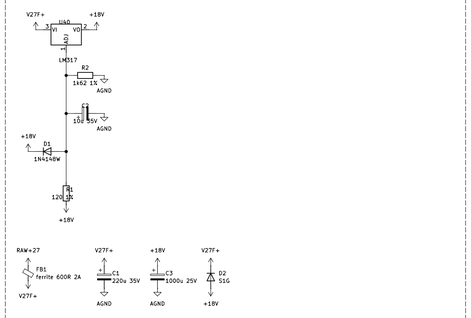


POWER −18 audio (LM337 from raw −27, 1000 uF bulk)

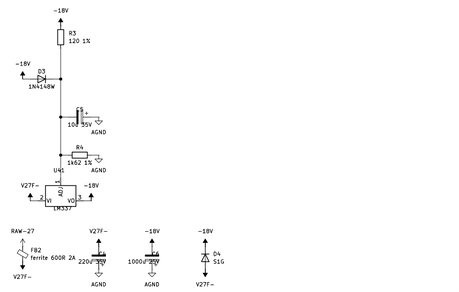


POWER +15 LN (LM317 to +16.5 from raw +22, then LT3045)

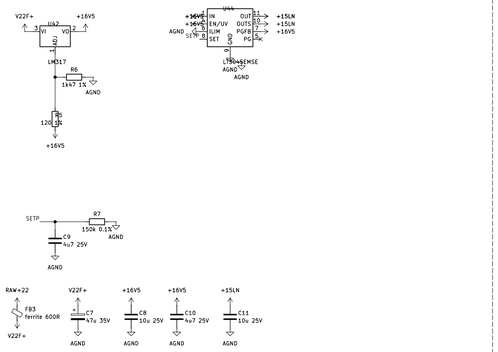


POWER −15 LN (LM337 to −16.5 from raw −22, then LT3094)

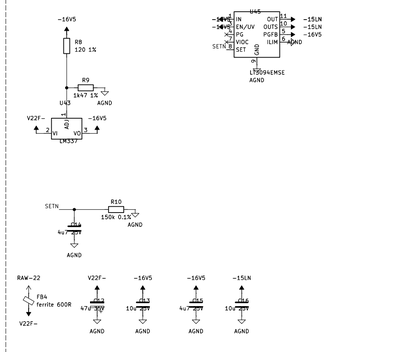


[A] CUE SUMMING L/R (virtual earth, Rf 10k, −1) and [B] MON (inverting 20k/20k, F4)

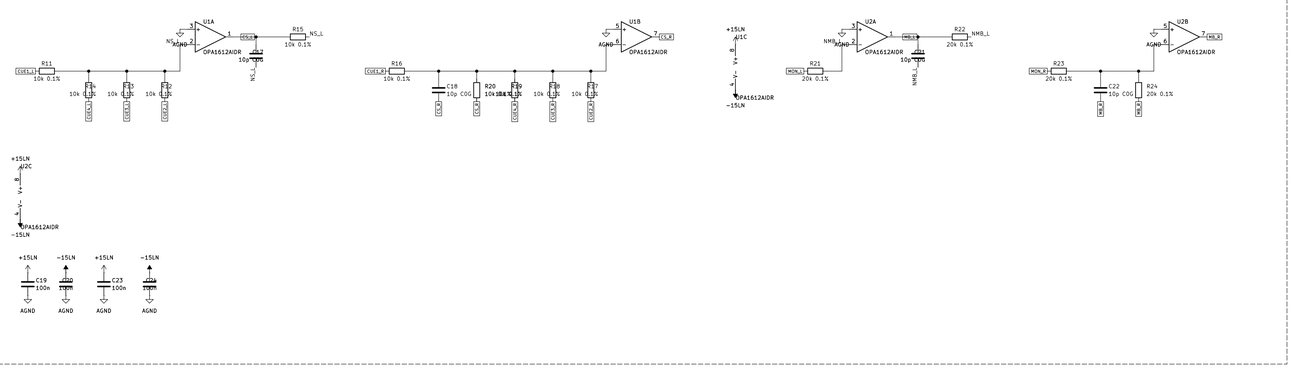


[C2] buffer between BLEND and LEVEL (keeps the blend law exact)

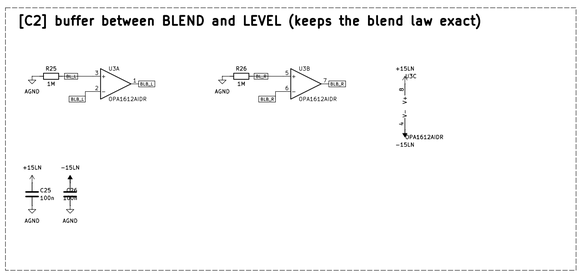


[E] HEADPHONE AMP L (OPA1612 + MJE340/350 diamond, v0.2)

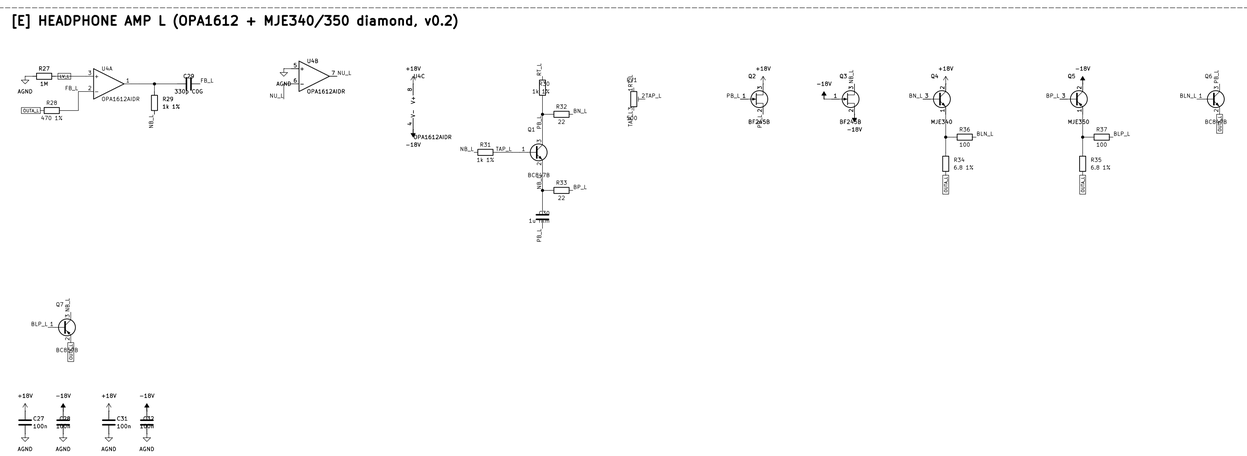

[F] SERIES R L (10 ohm 2 W, one per jack)

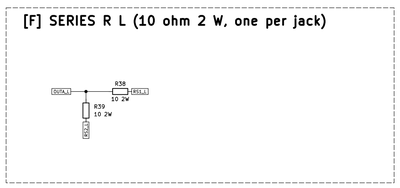


[E] HEADPHONE AMP R (OPA1612 + MJE340/350 diamond, v0.2)

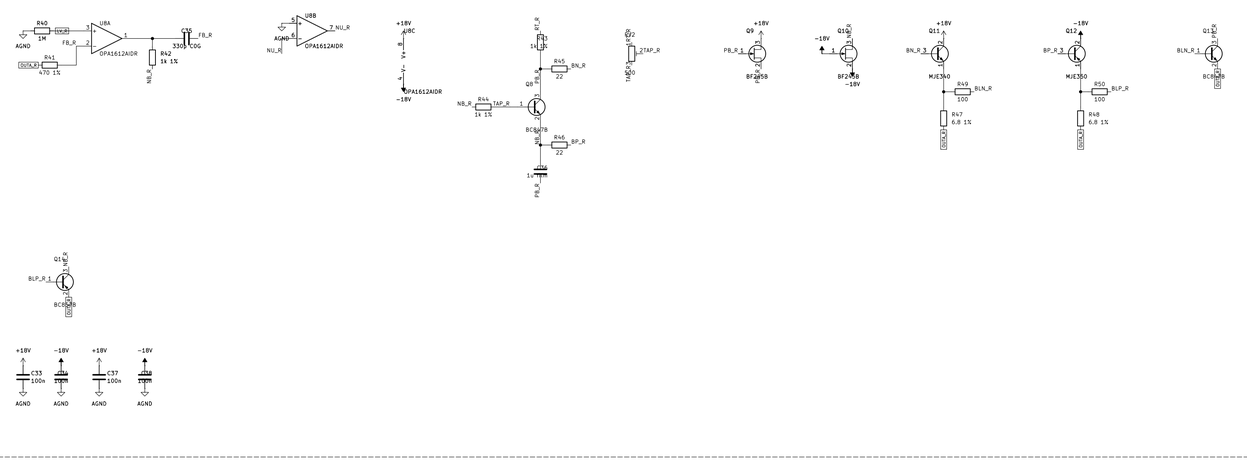


[F] SERIES R R (10 ohm 2 W, one per jack)



[F] HEADPHONE RELAYS (G6K−2F, 5 V, 237 ohm; energised = sound; failsafe)

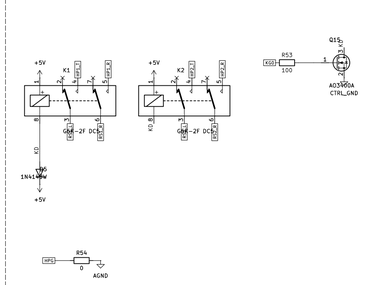

[G] PROTECTION: windows on raw +−22 and +−27, 1.8 s timer (the CUE ignores c9)

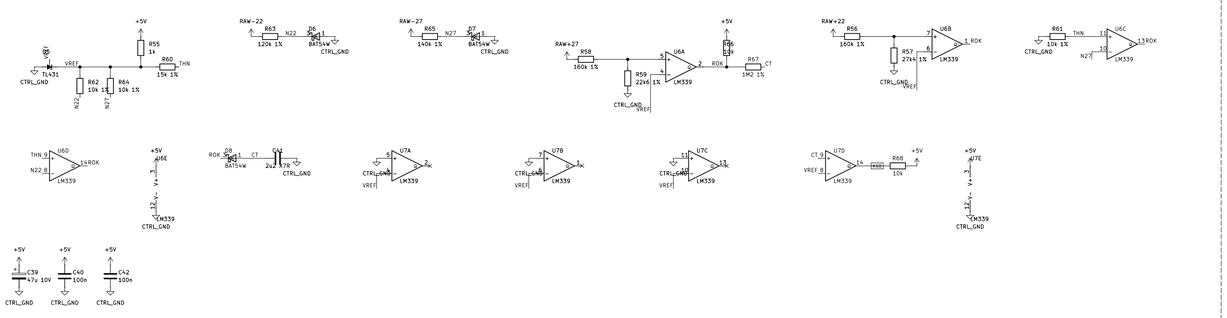

CABLES to the control board: J2 pots, J3 headphones



PWR_FLAG (for the ERC check only)



Generated by pcb/tools/leggibile.py from the same netlist as the PCB: do not edit by hand

Sheet: /
File: cue.kicad_sch

Title: maelcum CUE / cuffie (sistema-cue v0.2) — draft v0.1 — readable sc

Size: User	Date:	Rev: 0.1-draft
KiCad E.D.A. 10.0.7		Id: 1/1