


BACKPLANE C96 (MIC/GEN class, MSUM7)

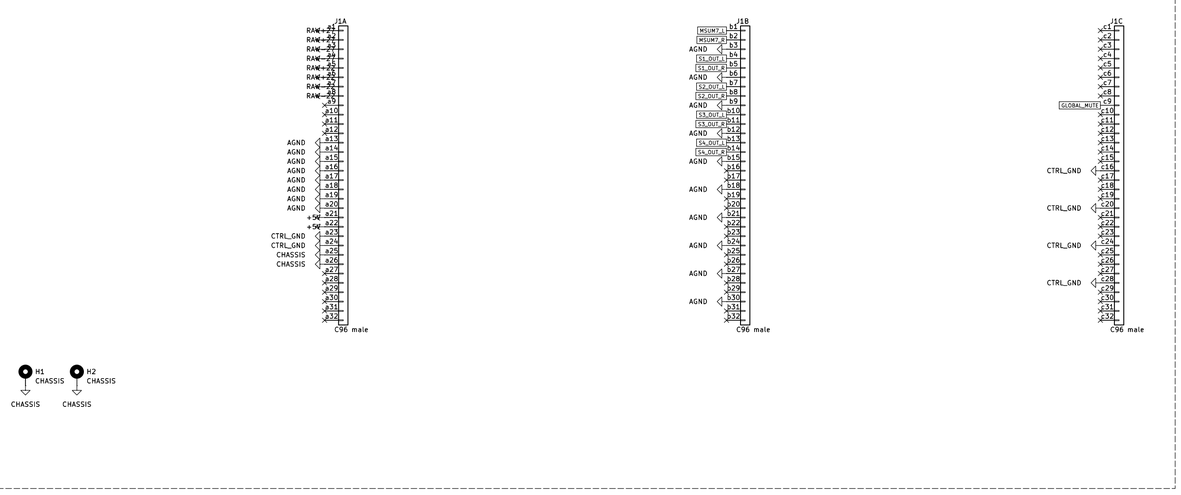


POWER +−18 audio, +−15 switch, +5

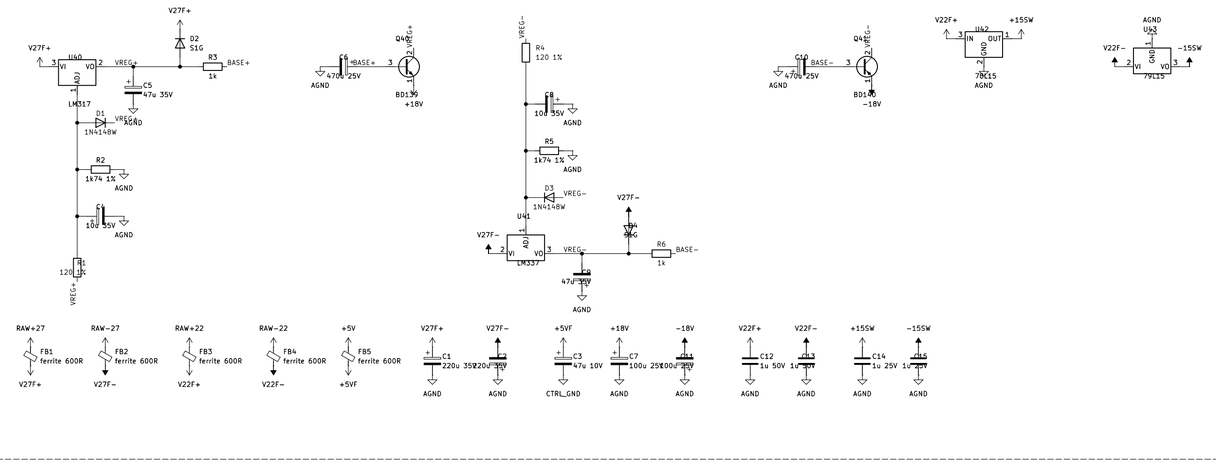


TS JACK INPUT: series R, clamp, TVS, film C, 1M bias

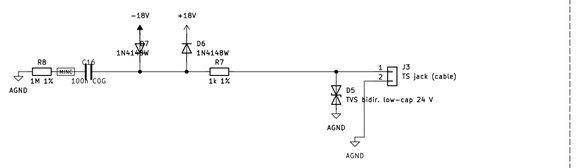


BUFFER, MAKE−UP +10 dB, LED DETECTOR (OPA1654)

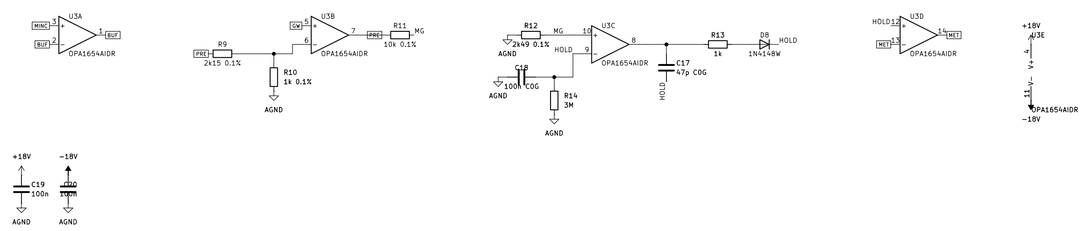


Three−colour LED (LM339)

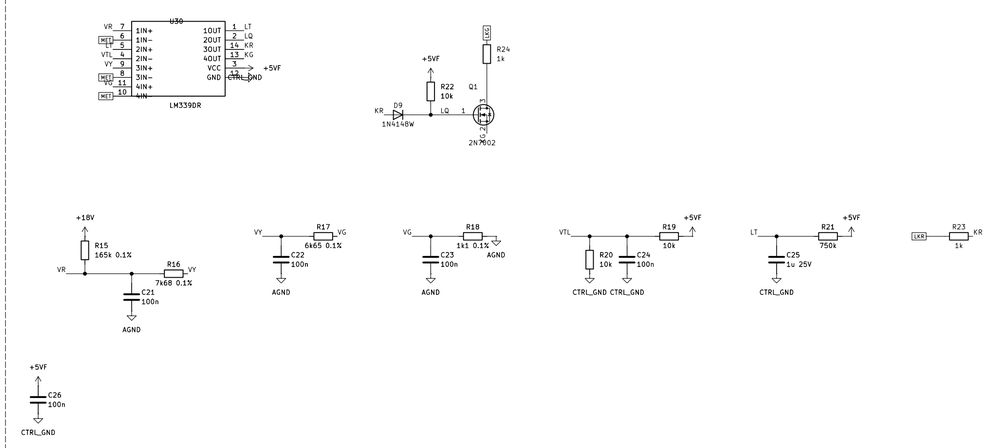


EQ2 (+−18)

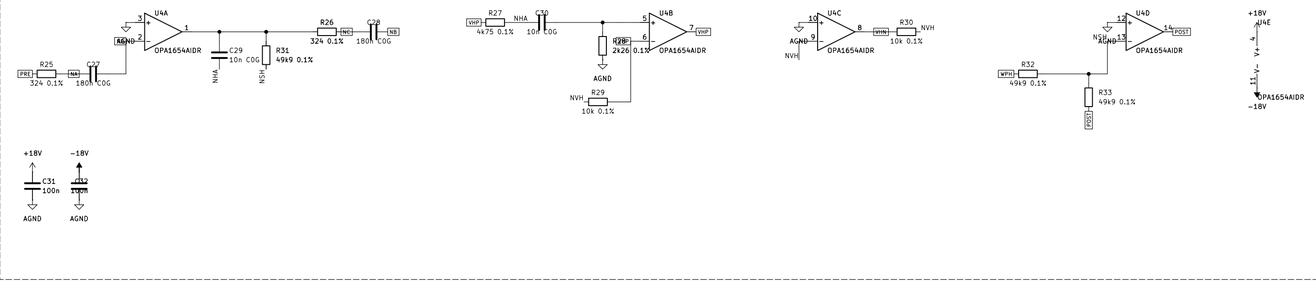


MSUM7 L/R DRIVERS (inverting, todo 227)

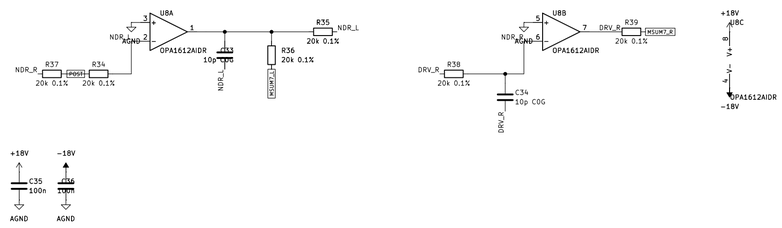


SENDS S1−S4 (pots on the cable, global mute, injection)

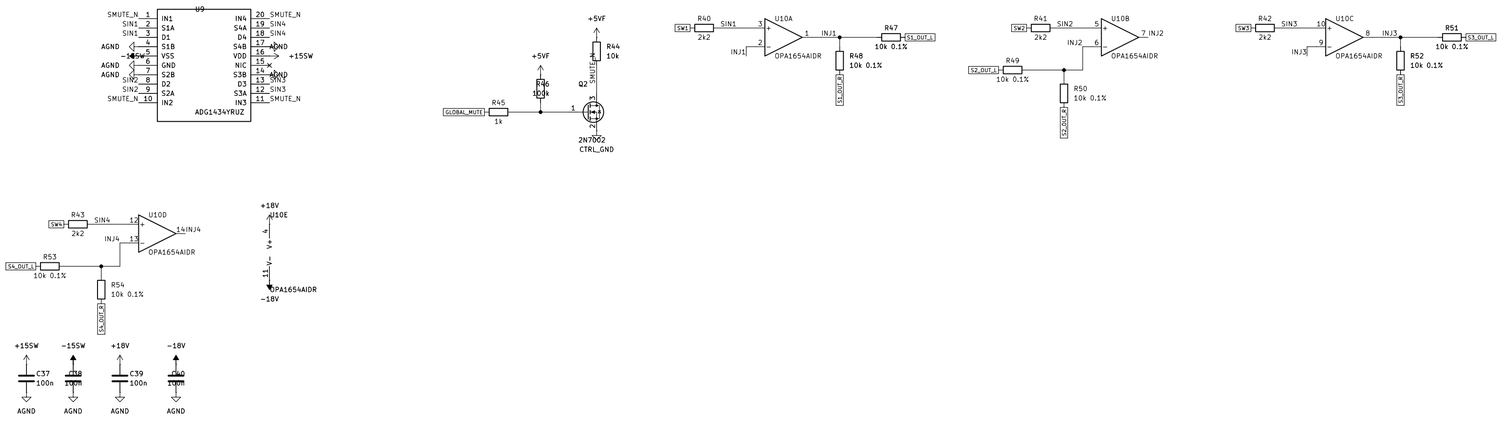

CONTROL BOARD CABLE (J2)



PWR_FLAG (for the ERC check only)

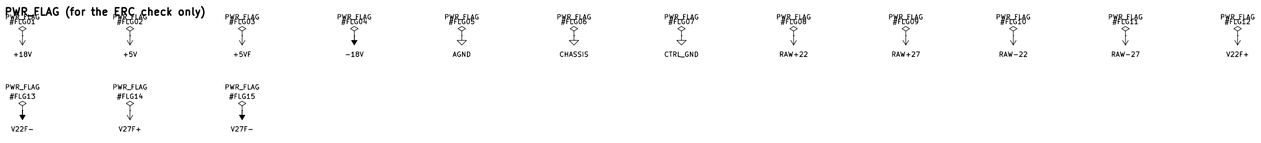

Generated by pcb/tools/leggibile.py from the same netlist as the PCB: do not edit by hand

Sheet: /
File: mono.kicad_sch

Title: maelcum MONO (dec. 97) — draft v0.1 — readable schematic

Size: User	Date:	Rev: 0.1−draft
KiCad E.D.A. 10.0.7		Id: 1/1