


BACKPLANE C96 (MIC/GEN class, MSUM6)

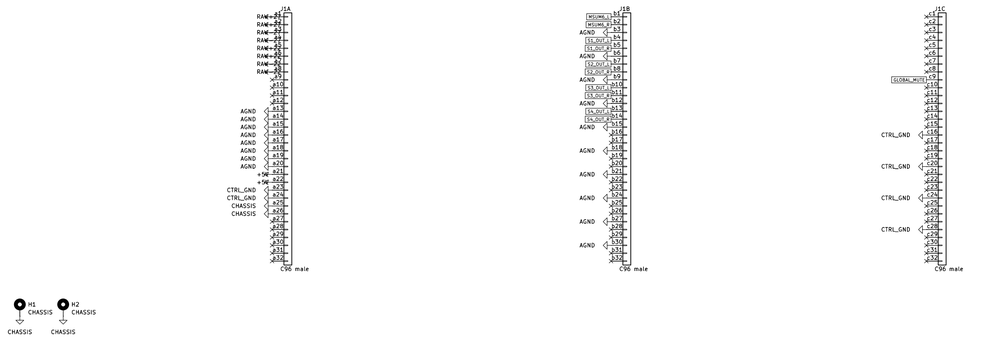


POWER: +18V (LM317 + BD139)

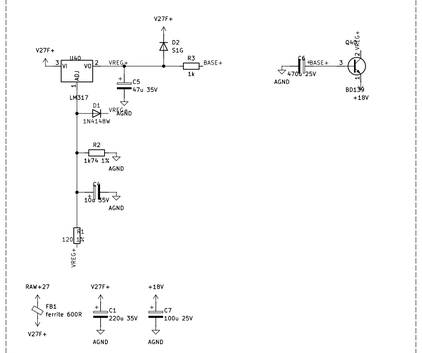


POWER: −18V (LM337 + BD140)

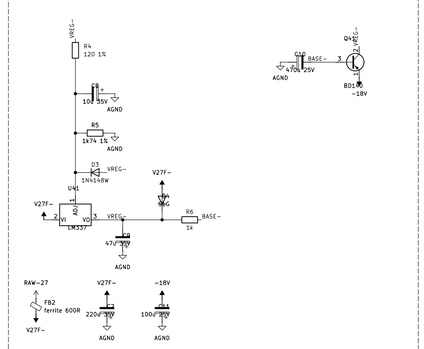


POWER: +15SW (78L15)




POWER: −15SW (79L15)




POWER: +5VF




POWER: +15LN (LT3045)

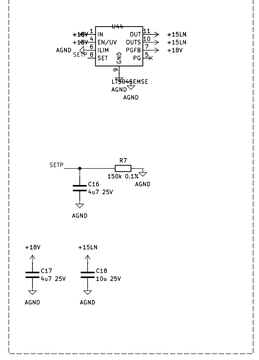


POWER: −15LN (LT3094)

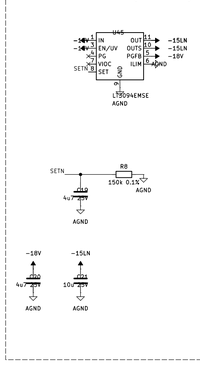


XLR INPUT: RFI, clamp, 2.32k load, 2x47k bias (mic−pre.inc)

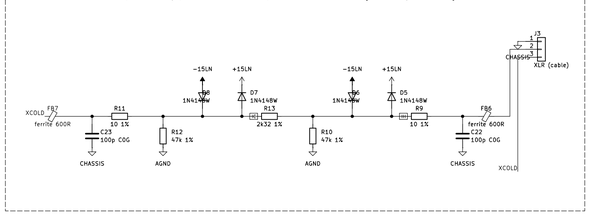


INA +30.05 dB and unity differential (OPA1612)

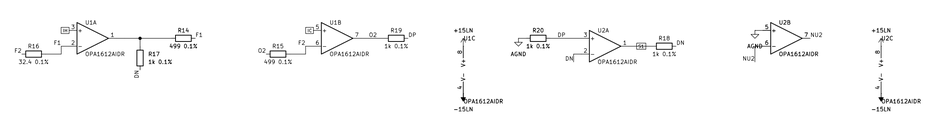


HIGH−PASS 60 Hz, STAGE 2 (0...+30 dB), LED DETECTOR (OPA1654)

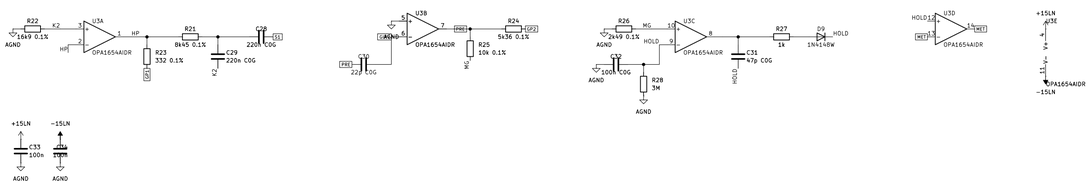


Three−colour LED (LM339)

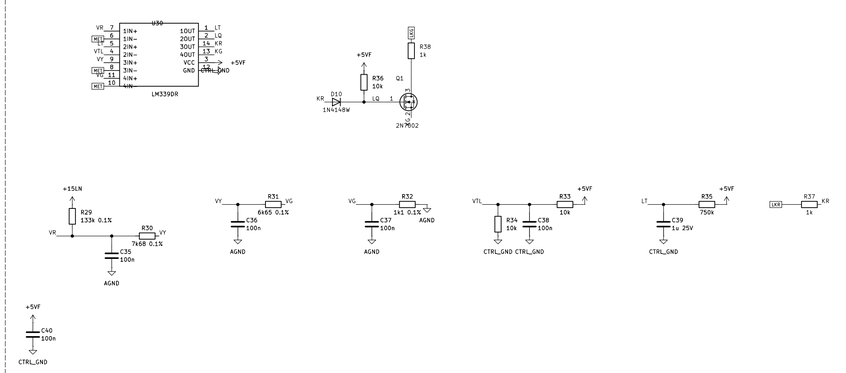


EQ2 (+−18)

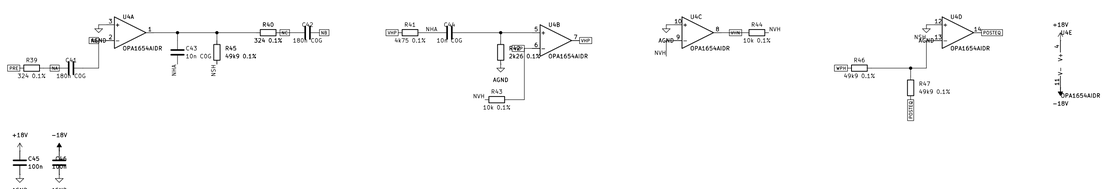


MUTE and limiter VCA (dec. 111, 145; sim/mic/mic−limiter.cir)

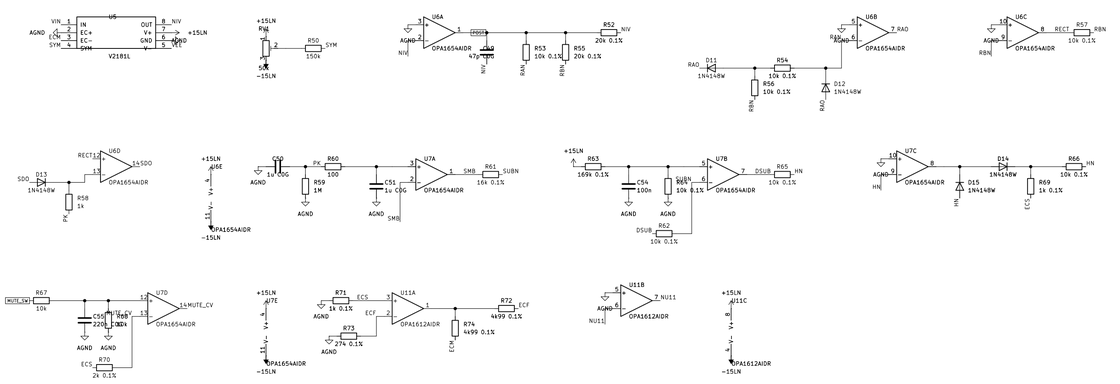


MSUM6 L/R DRIVERS (inverting, todo 227)

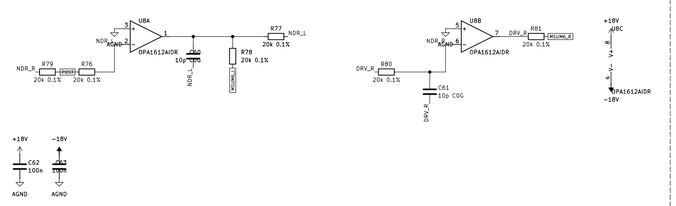

SENDS S1−S4 (pots on the cable, global mute, injection)

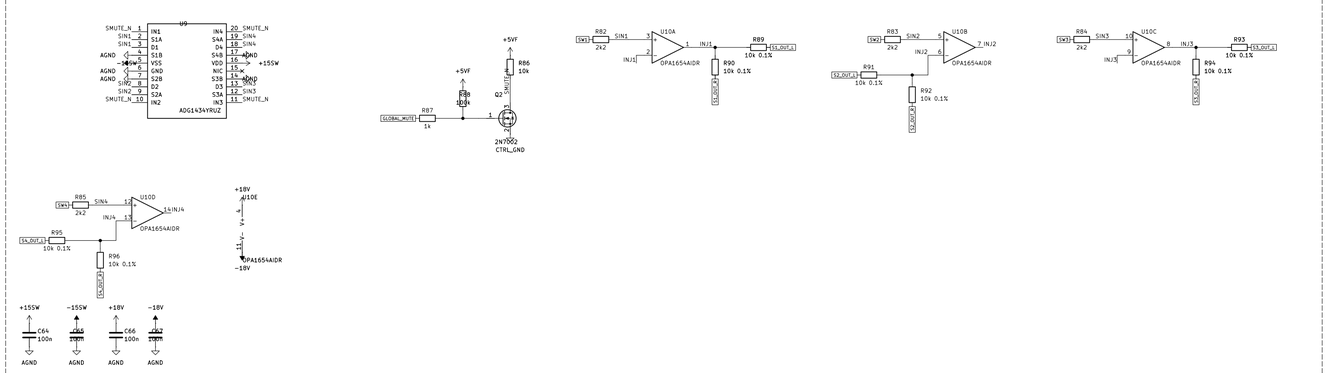

CONTROL BOARD CABLE (J2)



PWR_FLAG (for the ERC check only)



Generated by pcb/tools/leggibile.py from the same netlist as the PCB: do not edit by hand

Sheet: /
File: mic.kicad_sch

Title: maelcum MIC (dec. 97) — draft v0.1 — readable schematic

Size: User	Date:	Rev: 0.1−draft
KiCad E.D.A. 10.0.7		Id: 1/1