

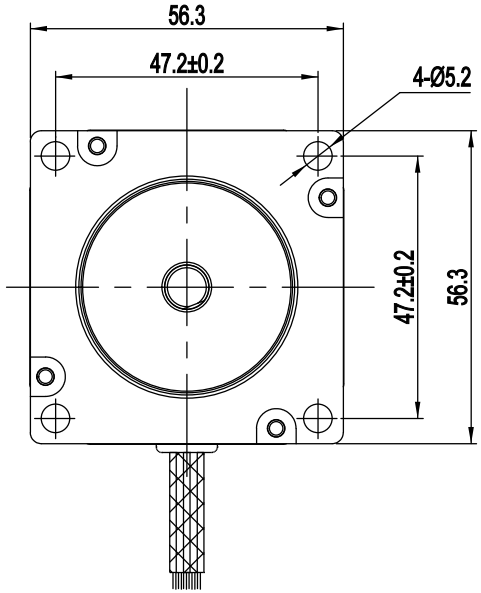


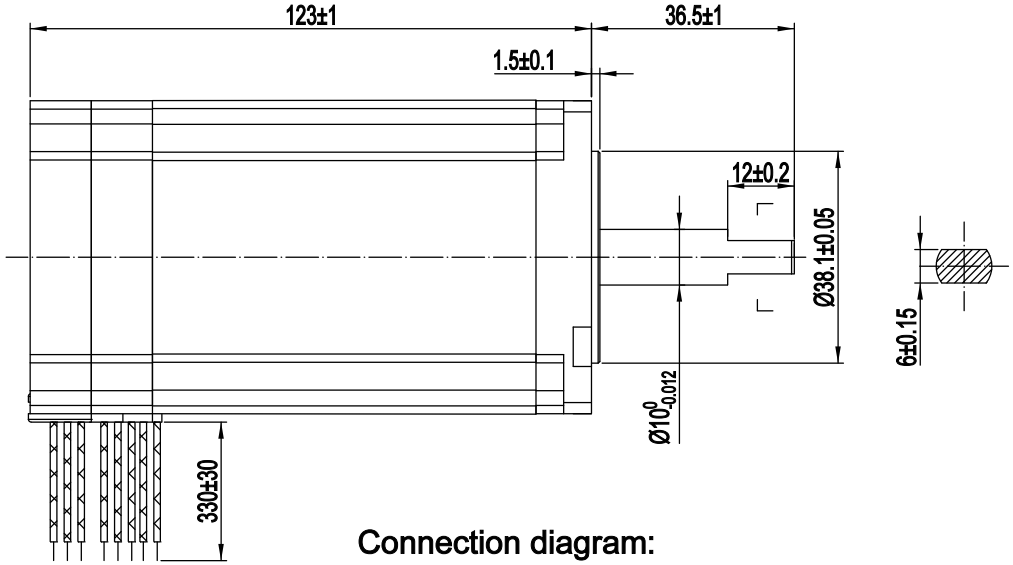


Connection diagram:

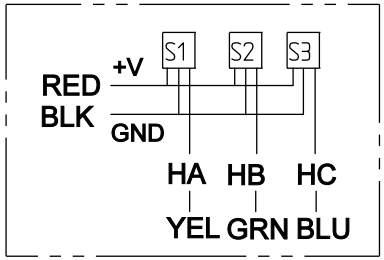

Hall sensor cable

Note: hall sensor power supply voltage +5 to +20VDC



Wiring cable

ROTATION: CW SEE FROM LEAD END

MANUFACTUER MODEL	57BLF04U-XX
RESISTANCE	0.15 OHMS
NOMINAL VOLTAGE	24 VDC
NO LOAD SPEED	4000 RPM
NO LOAD CURRENT	1.5 Amps
RATED TORQUE	0.8 N-m
RATED SPEED	3000 ±300 RPM
BACK EMF CONSTANT	6 V/kRPM
TORQUE CONSTANT	0.057 N-m/A
INSULATION CLASS	B

ELECTRICAL CONNECTION TABLE			
+5V	RED	红	UL1007 26 AWG
HALL A	YELLOW	黄	
HALL B	GREEN	绿	
HALL C	BLUE	蓝	
GND	BLACK	黑	
PHASE A	YELLOW	黄	AF 0.75
PHASE B	GREEN	绿	
PHASE C	BLUE	蓝	

版本	位置	更改说明	签名	日期

设计			标准化		
绘图			审核		
校对			批准		
工艺					

客户图号					
图样标记	质量	图幅	比例		
S			A3	1:1	
版本 A	共1 张 第1 张				

57BLF04U-XX

外形图

常州合泰电机电器股份有限公司

签字

打印日期