
TETRA COMPACT 40 RATINGS AND SPECIFICATIONS

TIME RATING	Continuous	AMBIENT TEMPERATURE	0 to 40 °C
INSULATION CLASS	F	AMBIENT HUMIDITY	20 to 80% (not condensation)
ENCLOSURE	Totally enclosed. Self-cooled	POLES	8
PROTECTION CLASS	IP 65 standard on the body	THERMAL PROTECTION	Not available
INSULATION SYSTEM UL /CSA	cURus , DV155J File nr.:E216686	CE certified	


		TC 40 0.16 32	TC 40 0.16 01	TC 40 0.32 01	TC 40 0.32 21
Stall Torque	Nm	0,21	0,21	0,34	0,34
Peak Torque	Nm	0,48	0,48	0,96	0,96
Nominal Torque	Nm	0,2	0,2	0,32	0,32
Rated Output	W	60	60	100	100
Stall Current	Arms	4,200	2,340	3,160	0,642
Peak Current	Arms	10,50	5,60	11,20	2,00
Nominal Current	Arms	4,120	2,190	3,510	0,620
Rated Speed	rpm	3000	3000	3000	3000
Maximum Speed 24VDC	rpm	5000	3000	3000	-
Maximum Speed 48VDC	rpm	-	5000	5000	-
Maximum Speed 230VAC	rpm	-	-	-	5000
Torque Constant ± 5%	Nm/Arms	0,050	0,094	0,094	0,526
Voltage Constant ± 5%	Vrms/Krpm	3,000	5,700	5,700	31,800
Phase/phase resistance ± 5%	Ohm	2,2	0,92	0,99	33,84
Phase/phase inductance	mH	2,5	0,7	3,4	0,6
Electrical time constant	ms	1,13	0,76	1,43	1,40
Thermal Resistance	°C/W	1,12	8,63	4,39	3,11
Mechanical time constant	ms	0,9	0,9	0,7	0,7
Rotor Inertia	Kg cm^2	0,027	0,027	0,047	0,047
Motor Weight	Kg	0,4	0,4	0,54	0,54
Dimensions					
L * (Without Brake)	mm	91	91	109	109
L * (With Brake)	mm	122	122	140	140
A	mm	25	25	25	25
d	mm	3x3x15	3x3x15	3x3x15	3x3x15
C	mm	8 (h7)	8 (h7)	8 (h7)	8 (h7)

Rated output with 250 x 250 x 6 mm metallic heat sink flange coupling - Derating must be considered if the oil seal is applied - IP 42 standard shaft bushing


* Motor's lenght increases of 11mm with absolute encoder feedback

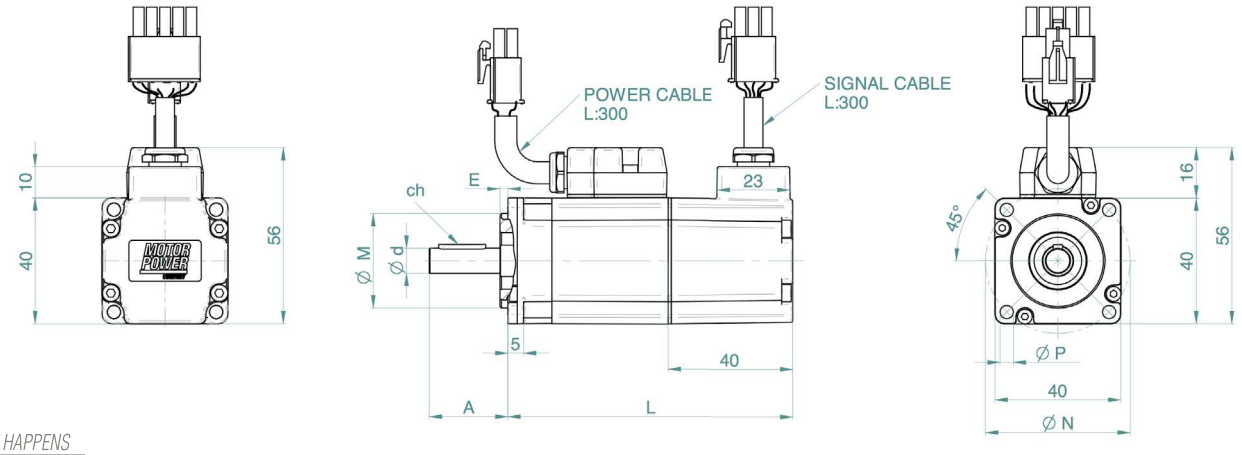


TETRA COMPACT 40 TORQUE AND SPEED CHARTS

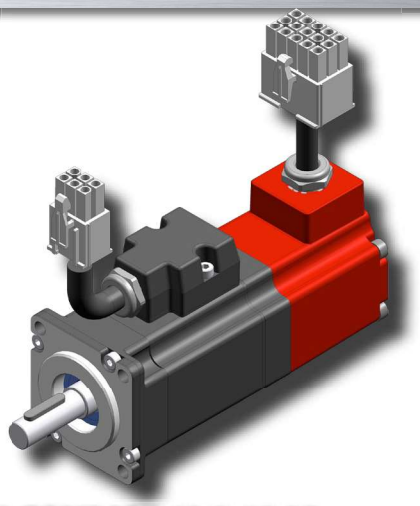


TETRA COMPACT 40 0.16 01

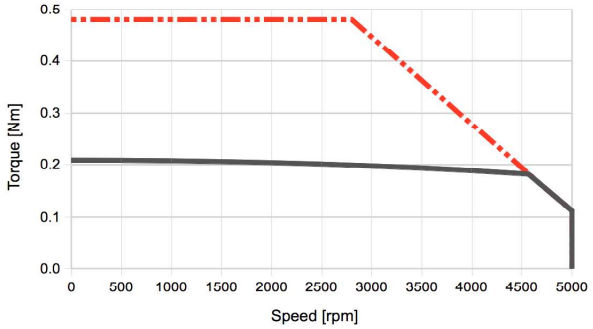

TETRA COMPACT 40 0.16 32

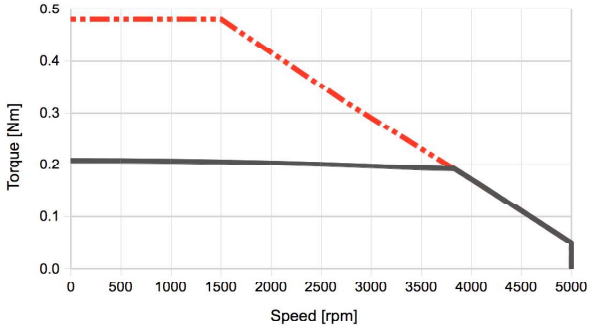

TETRA COMPACT 40 0.32 01

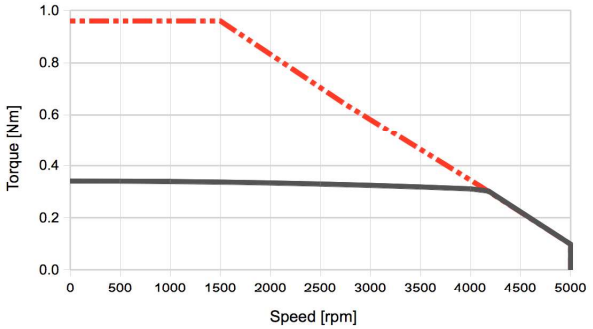

TETRA COMPACT 40 0.32 21

