SPRING-ACTUATED BRAKES

Product Lineup

BXW-L/H/S



Three types for various applications

The line-up includes three types: the S type for holding, the L type for braking, and the H type for both holding and braking.


2-way mounting

The stator (a heat source) can be mounted facing either inwards or outwards.

Brake type		BXW-□-□L	BXW-□-□H	BXW-□-□S
Brake torque	[N·m]	0.12 ~ 2.00	0.24 ~ 4.00	0.36 ~ 5.20
Operating temperature	[℃]	−10 ~ +40	−10 ~ +40	−10 ~ +40
Backlash		Extremely small size	Extremely small size	Extremely small size

Structure

Has release lever

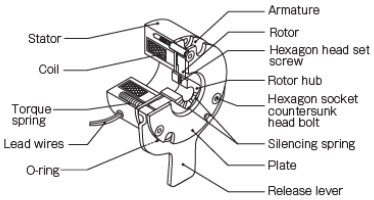


BXW-□-□S (Holding use)

Model	Size	Static friction torque T_S [N·m]	Coil (at 20℃) Voltage [V]	Wattage [W]	Current [A]	Resistance [Ω]	Heat resistance class	Lead wire UL style	Lead wire Size	Max. rotation speed [min⁻¹]	Rotating part moment of inertia J [kg·m²]	Allowable braking energy rate $P_{b\alpha\beta}$ [W]	Total braking energy Er[J]	Armature pull-in time t_a [s]	Armature release time t_{ar} [s]	Mass [kg]
BXW-01-10S	01	0.36	24	5.0	0.208	115	F	UL3398	AWG26	5000	0.6×10^{-6}	—	—	0.025	0.010	0.2
BXW-02-10S BXW-02-12S	02	0.75	24	6.6	0.275	87.3	F	UL3398	AWG26	5000	1.9×10^{-6}	—	—	0.030	0.010	0.3
BXW-03-10S BXW-03-12S	03	1.50	24	9.0	0.375	64.0	F	UL3398	AWG26	5000	3.8×10^{-6}	—	—	0.035	0.020	0.4
BXW-04-10S BXW-04-12S	04	2.60	24	11.5	0.479	50.1	F	UL3398	AWG22	5000	12.0×10^{-6}	—	—	0.040	0.025	0.6
BXW-05-10S BXW-05-12S	05	5.20	24	13.0	0.542	44.3	F	UL3398	AWG22	5000	23.0×10^{-6}	—	—	0.045	0.030	0.8

* The armature pull-in time and armature release time are taken during DC switching.

Dimensions

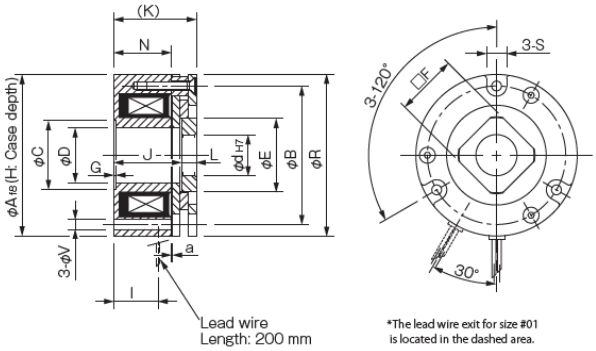

*The lead wire exit for size #01 is located in the dashed area.

Unit [mm]

Size	Radial direction dimensions									Axial direction dimentions								Bore dimensions	
	A	B	C	D	E	S	V	R	F	G	H	I	J	K	L	N	a	d	d max
01	33	26.5	16	9	14	7	3.4	32.5	12	0.2	4	19	26	30	4	22.8	0.1	8.5	8.5
03	48	42	26	14	23	8	3.4	47.5	19	0.2	4	18	26	30	4	22.6	0.1	11	15
05	64	56	28	22	31	8	4.5	63.5	25	0.2	4	16	25.5	30	4.5	21.3	0.1	16	20

* Bore diameters other than the standard bore diameters given above are also possible. d max indicates the maximum bore diameter with a round shaft.
* In addition to round bores, key processing can also be handled. Consult Miki Pulley for details.
* Dimensions, mounting and the like are not interchangeable with other BXW models.

How to Place an Order

BXW-01-10R-24V-8.5

- Size
- Release lever 10: Not included
- Application R: Servo motor-use
- Voltage (Specifications table)
- Bore diameter (dimensional symbol d)

*Contact Miki Pulley for assistance with bore diameters, d, not listed in the Dimensions tales and voltages not listed in the Specifications table.