


2S input: connector, fuse, reverse-polarity P-FET, clamps, bulk input

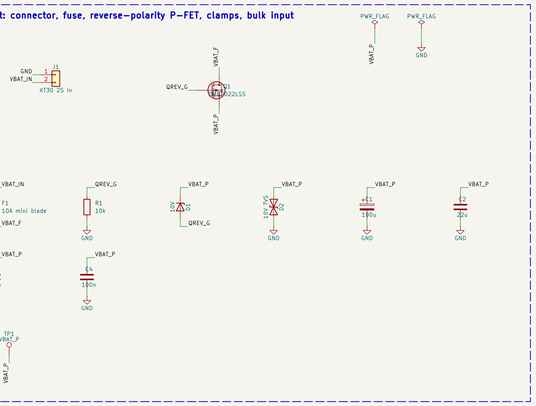


TPS54821 synchronous buck, compensation and output filter

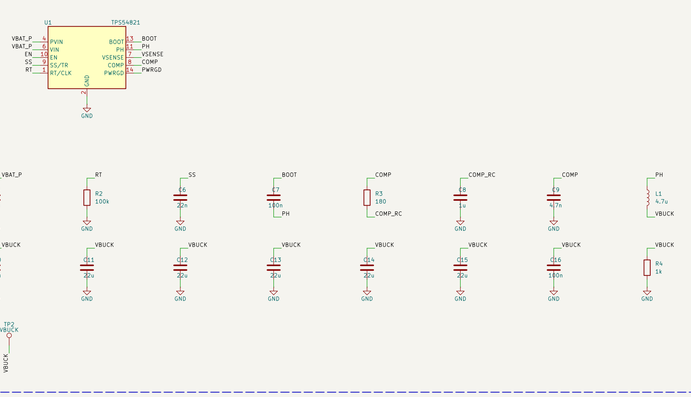


Shunt, INA186 regulation feedback, INA300 backup trip, output disconnect

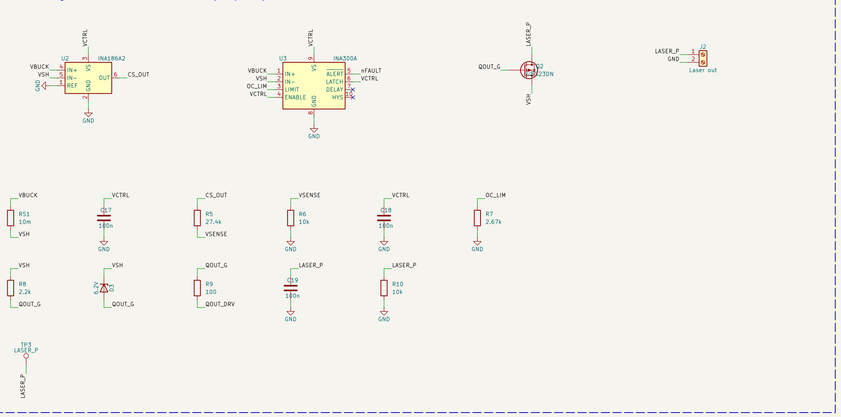

Default-off interface (DD-32): nFAULT line, latch, monitors, series AND switches

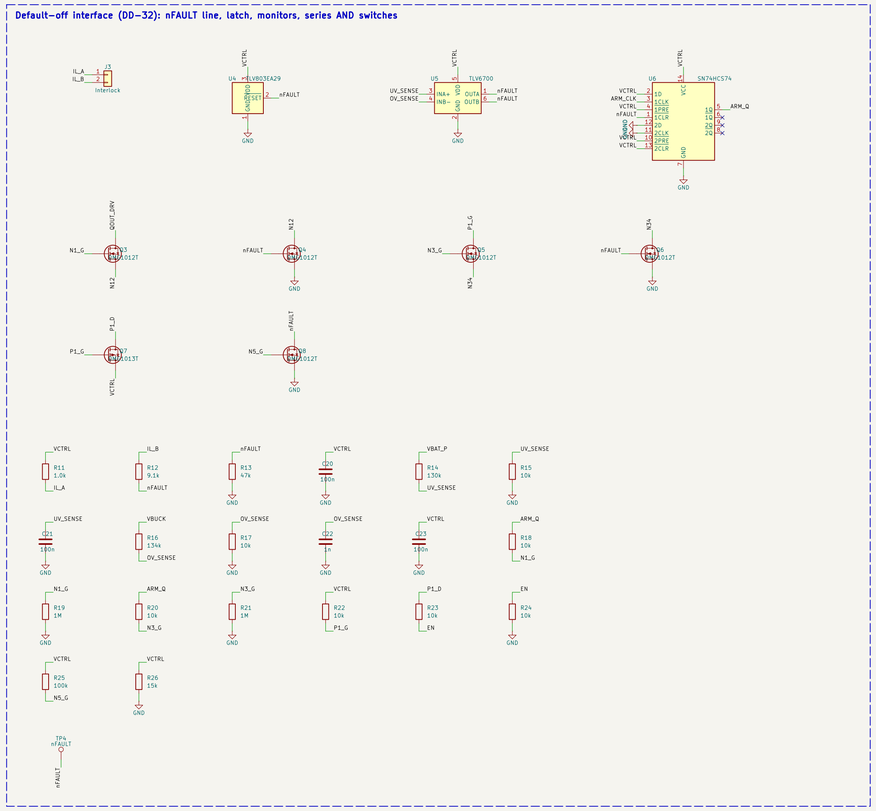

3.3 V rail, ATtiny1616, measurement and user interface

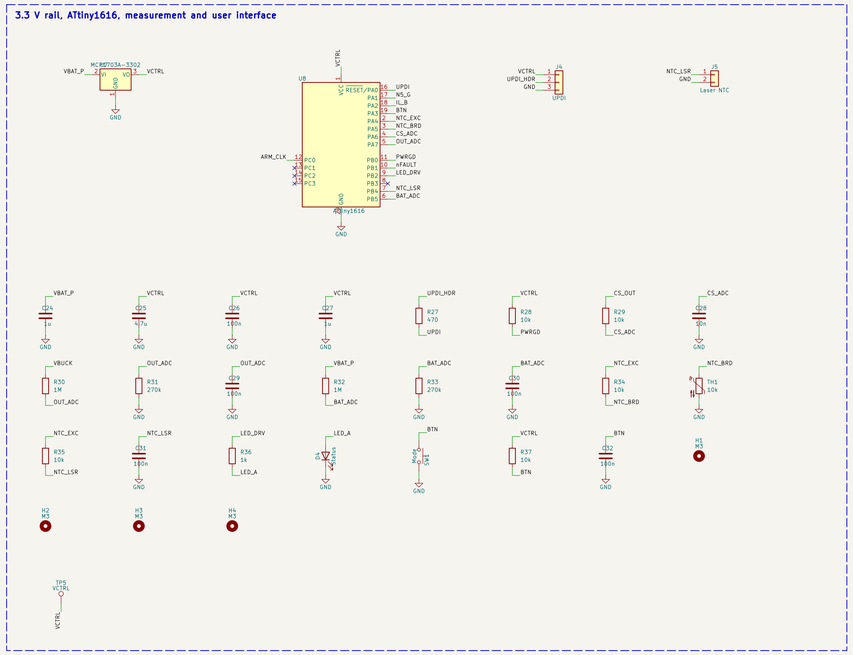

Class 4 laser product: see documentation/testing for safety requirements
DRAFT: ELECTRICAL_QUALIFICATION, not for fabrication: footprints marked budget2s: are OPEN
Generated from engineering/design/budget-2s/connectivity.yaml — do not edit by hand
NUBM44 driver project — budget-2s (separate circuit)

Sheets: /
File: nubm44_budget2s.kicad_sch

Title: NUBM44 budget 2S driver

Size: A1	Date: 2026-10-29	Rev: B3-draft
KiCad E.D.A. 10.0.6		Id: 1/1