


Battery input and reverse-polarity protection

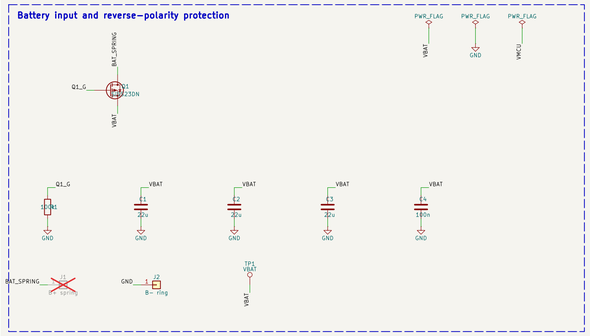


TPS552882 4-switch buck-boost power stage

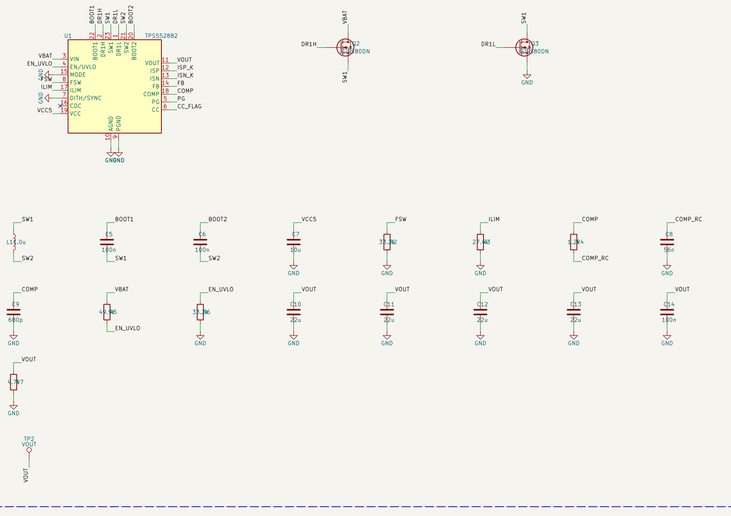


Laser current sensing, regulation feedback and output

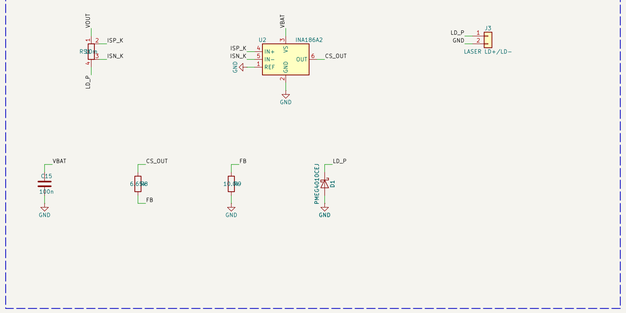

ATtiny1616 control, monitoring and user interface

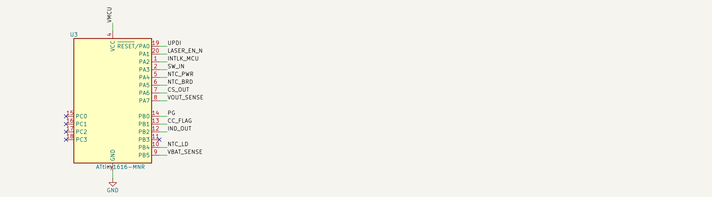

Hardware enable chain: default-off, interlock, over-voltage backstop

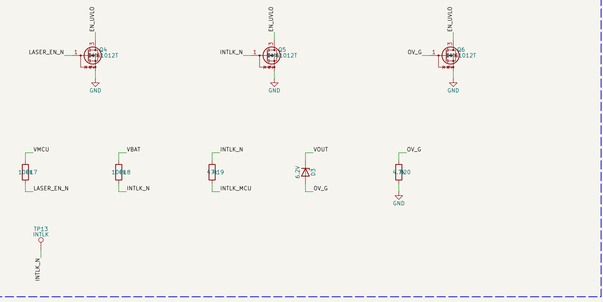

Hardware enable chain: default-off, interlock, over-voltage backstop

Class 4 laser product: see documentation/testing for safety requirements
Battery polarity: centre spring = B+, ring = B- (REQ-BAT-04/DD-12: marked on the silkscreen)
Generated from engineering/design/connectivity.yaml — do not edit by hand

NUBM44 driver project	
Sheet: /	
File: nubm44_driver.kicad_sch	
Title: NUBM44 driver — Variant A (22 mm)	
Size: A1 Date: 2026-10-24	**Rev: A**
KiCad E.D.A. 10.0.6	Id: 1/1