


2S input: connector, fuse, reverse-polarity P-FET, clamps, bulk input

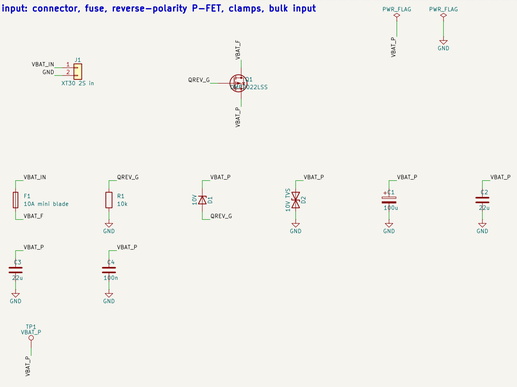


TPS54821 synchronous buck, compensation and output filter

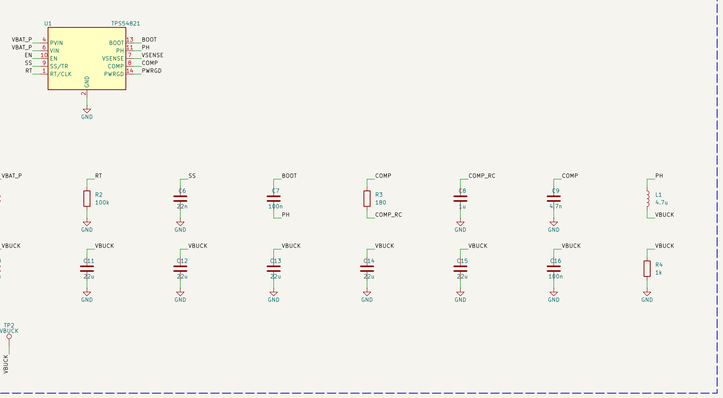


Shunt, INA186 regulation feedback, INA300 backup trip, output disconnect

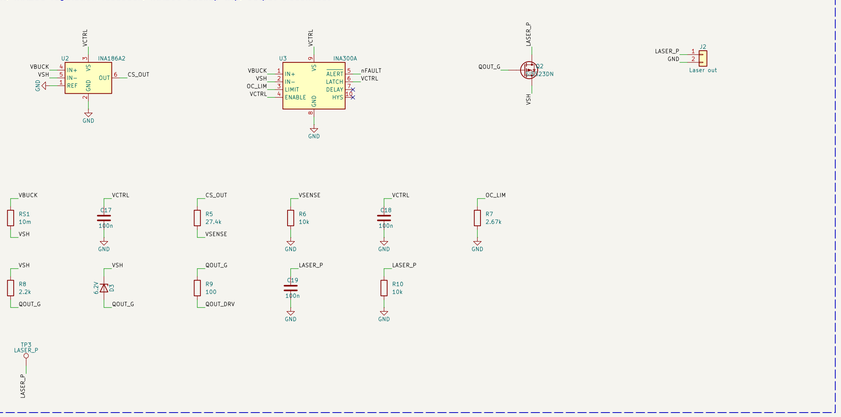

Default-off interface (DD-32): nFAULT line, latch, monitors, series AND switches

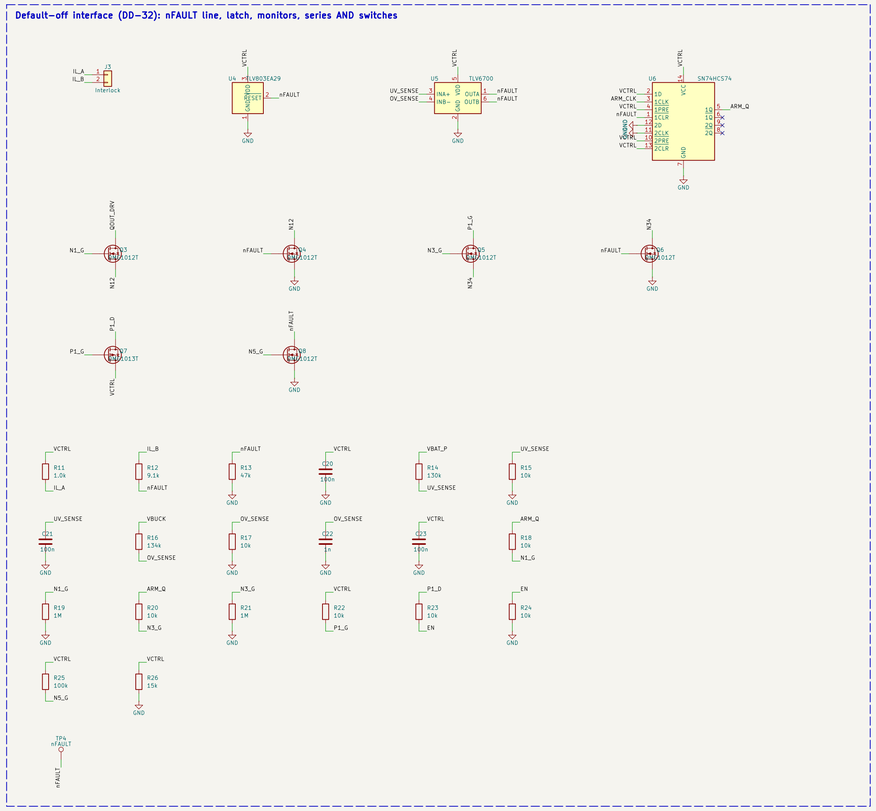

3.3 V rail, ATtiny1616, measurement and user interface

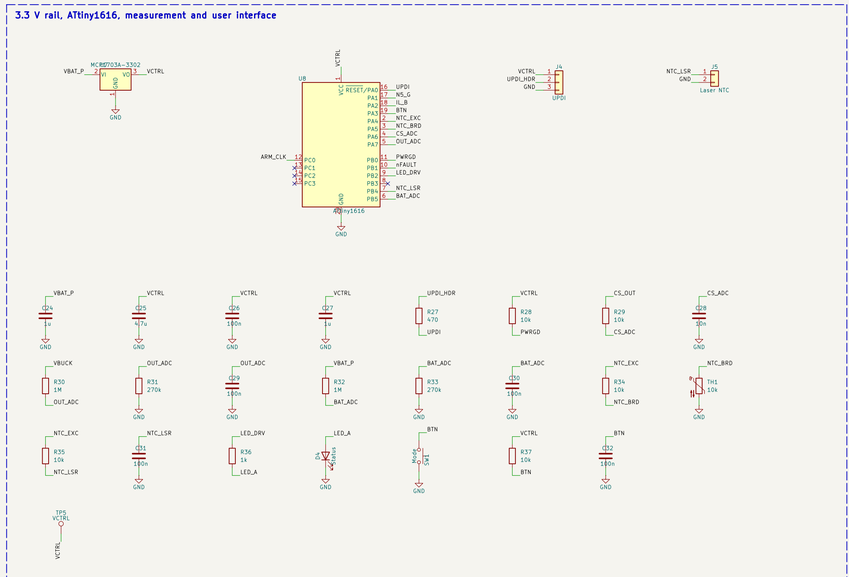

Class 4 laser product: see documentation/testing for safety requirements
DRAFT: ELECTRICAL_QUALIFICATION, not for fabrication: footprints marked budget2s: are OPEN
Generated from engineering/design/budget-2s/connectivity.yaml — do not edit by hand

NUBM44 driver project — budget-2s (separate circuit)	
Sheets: /	
File: nubm44_budget2s.kicad_sch	
Title: NUBM44 budget 2S driver	
Size: A1 | Date: 2026-10-29	**Rev: B3-draft**
KiCad E.D.A. 10.0.6	Id: 1/1