Pinoutguide.com

Распиновка PCI Express Mini Card (Mini PCIe)

распиновки разъемов на материнской плате

Pinouts > Распиновки слотов расширения на материнской плате

52 pin mini-PCIE edge pcb connector

PCI Express Mini Card (also known as Mini PCI Express, Mini PCIe, and Mini PCI-E) is a replacement for the Mini PCI form factor based on PCI Express. It is developed by the PCI-SIG. The host device supports both PCI Express and USB 2.0 connectivity, and each card uses whichever the designer feels most appropriate to the task. Most laptop computers built after 2005 are based on PCI Express and can have several Mini Card slots.

Top side		Bottom side	
1	WAKE#	2	3.3V
3	Reserved****	4	GND
5	Reserved****	6	1.5V
7	CLKREQ#	8	VCC**
9	GND	10	I/O**
11	REFCLK-	12	CLK**
13	REFCLK+	14	RST**
15	N/C or GND	16	VPP**
Mechanical key			
17	Reserved	18	GND
19	Reserved	20	Reserved***
21	GND	22	PERST#
23	PERn0	24	+3.3Vaux
25	PERp0	26	GND
27	GND	28	+1.5V
29	GND	30	SMB_CLK

31	PETn0	32	SMB_DATA
33	PETp0	34	GND
35	GND	36	USB_D-
37	Reserved*	38	USB_D+
39	Reserved*	40	GND
41	Reserved*	42	LED_WWAN#
43	Reserved*	44	LED_WLAN#
45	Reserved*	46	LED_WPAN#
47	Reserved*	48	+1.5V
49	Reserved*	50	GND
51	Reserved*	52	+3.3V

*Reserved for future second PCI Express Lane (if needed). Pin 51 has changed to be W_DISABLE2#
**Reserved for future Subscriber Identity Module (SIM) interface (if needed)
***Reserved for future wireless disable signal (if needed)
****Reserved for future wireless coexistence control interface (if needed)

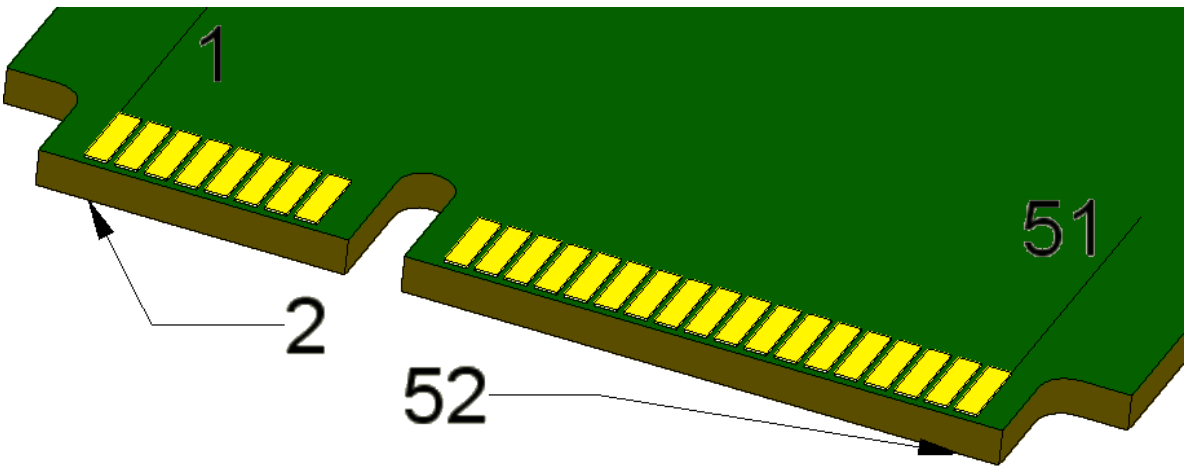

Статус распиновки: +17 -1

На распиновку PCI Express Mini Card (Mini PCIe) есть 23 отзыв(а): 17 положительных и 1 отрицательных.

Эта распиновка
правильная с ошибками

1 DIY устройства

1 источников информации

- pdf

Прислал: Miklos Morton, Mihail
Последнее обновление 2020-08-24 18:54:24.

Copyright © 2000-2021 by pinouts.ru team, except user uploaded images.
No portion of this webpage may be reproduced in any form without visible link to pinoutguide.com .
Efforts have been made to ensure this page is correct, but it is the responsibility of the user to verify the data is correct for their application.