

Manufacturing Analysis Report

core_one_assembly

Total Holes:	12479
Turned Part:	No
Volume:	4,569,821 mm ³
Surface Area:	5,259,902 mm ²
ISO 2768:	ISO 2768-mK
Est. Mass (Steel):	35.87 kg

Applicable Standards:

- ✓ ISO 2768 - General tolerances
- ✓ ISO 286 - Limits and fits
- ✓ ISO 1302 - Surface texture
- ✓ ISO 68-1 / ISO 261 - Metric screw threads
- ✓ ISO 13715 - Edge conditions
- ✓ EN 10025 / EN 573 - Material specifications

Module Configuratie / Module Configuration:

Werkvoorbereiding: 5/5 modules actief

- ✓ AAN - Kostprijsberekening
- ✓ AAN - Gereedschapslijst
- ✓ AAN - Uitbesteding
- ✓ AAN - Oppervlaktebehandeling
- ✓ AAN - Inkoop Specificatie

ISO 2768 - General Tolerances

Recommended Designation: ISO 2768-mK

Linear Tolerance Class: M (f=fine, m=medium, c=coarse, v=very coarse)

Geometric Tolerance Class: K (H=precise, K=standard, L=relaxed)

Dimension Tolerances:

Dimension (mm)	Tolerance	Class
415.5	±0.8	M
549.0	±0.8	M
555.6	±0.8	M

ISO 286 - Hole Fits & Tolerances

Diameter	Count	Recommended Fit	Fit Type	H7 Tolerance
Ø0.0 mm	2	H7/h6	clearance	N/A
Ø0.1 mm	4	H7/h6	clearance	N/A
Ø0.2 mm	60	H7/h6	clearance	N/A
Ø0.3 mm	244	H7/h6	clearance	N/A
Ø0.4 mm	471	H7/h6	clearance	N/A
Ø0.5 mm	33	H7/h6	clearance	N/A
Ø0.6 mm	726	H7/h6	clearance	N/A
Ø0.7 mm	1	H7/h6	clearance	N/A
Ø0.8 mm	31	H7/h6	clearance	N/A
Ø0.9 mm	2	H7/h6	clearance	N/A
Ø1.0 mm	630	H7/h6	clearance	±0.0100 mm
Ø1.1 mm	344	H7/h6	clearance	±0.0100 mm
Ø1.2 mm	63	H7/h6	clearance	±0.0100 mm
Ø1.4 mm	6	H7/h6	clearance	±0.0100 mm
Ø1.5 mm	13	H7/h6	clearance	±0.0100 mm

... and 149 more hole sizes

ISO 68-1 / ISO 261 - Metric Thread Detection

Detected 10619 potential threaded holes

Thread	Count	Tap Drill (mm)	Pitch (mm)
M1	976	0.75	0.25
M1 (tapped)	416	0.75	0.25
M1.2	63	0.95	0.25
M1.4	19	1.10	0.30
M1.6	226	1.25	0.35
M1.8	88	1.45	0.35
M10	142	8.50	1.50
M10 (tapped)	14	8.50	1.50

M12	13	10.25	1.75
M14	9	12.00	2.00
M16	21	14.00	2.00
M18	8	15.50	2.50
M18 (tapped)	4	15.50	2.50
M2	692	1.60	0.40
M2.2	37	1.75	0.45
M2.5	1955	2.05	0.45
M20	30	17.50	2.50
M22	6	19.50	2.50
M22 (tapped)	1	19.50	2.50
M24	4	21.00	3.00
M27	2	24.00	3.00
M3	2117	2.50	0.50
M3.5	146	2.90	0.60
M3.5 (tapped)	12	2.90	0.60
M30	5	26.50	3.50
M33	3	29.50	3.50
M36	3	32.00	4.00
M36 (tapped)	1	32.00	4.00
M39	8	35.00	4.00
M4	666	3.30	0.70
M4 (tapped)	428	3.30	0.70
M4.5	69	3.75	0.75
M4.5 (tapped)	1877	3.75	0.75
M42	2	37.50	4.50
M42 (tapped)	7	37.50	4.50
M48	1	43.00	5.00
M5	66	4.20	0.80
M5 (tapped)	12	4.20	0.80
M6	179	5.00	1.00
M6 (tapped)	1	5.00	1.00
M7	90	6.00	1.00
M7 (tapped)	19	6.00	1.00
M8	115	6.75	1.25
M8 (tapped)	66	6.75	1.25

ISO 1302 - Surface Finish Requirements

Default Surface Roughness: Ra 3.2 μm

Recommendation: 3-axis CNC milling

Face Type	Count	%	Ra (μm)	Process
Plane	20001	50.9%	1.6	Finish milling
Cylinder	12479	31.7%	1.6	Finish turning
BSpline	3425	8.7%	1.6	Finish milling
Cone	2212	5.6%	1.6	Finish turning
Torus	971	2.5%	1.6	Finish milling
Sphere	242	0.6%	1.6	Finish milling

ISO 13715 - Edge Conditions (Chamfers & Fillets)

Feature	Count	Average Size	Recommended Standard
Chamfers	1359	0.92 mm	1.0×45°
Fillets	853	R0.54 mm	R0.5

Note: All edges to be deburred and broken 0.2-0.5mm unless otherwise specified (ISO 13715)

EN 10025/573 - Material & Mass Estimation

Material	Standard	Density (kg/m³)	Mass (kg)
S235JR	EN 10025-2	7850	35.873
S355JR	N/A	N/A	35.873
EN AW-6061	EN 573-3	2700	12.338
EN AW-7075	N/A	N/A	12.841

Manufacturing Process Recommendation

Primary Process: 3-Axis CNC Milling

Complexity: MEDIUM

Secondary Operations:

- Drilling
- Tapping
- Deburring

Werkvoorbereiding / Manufacturing Preparation

Kostprijsberekening / Cost Estimate

Item	Bedrag
Kostprijs per stuk	€31414.57
Materiaalkosten	€64.57
Bewerkingskosten	€31350.00
Setup per stuk	€60.00
Bewerkingstijd	522.50 uur
Uurtarief	€60.00/uur

Gereedschapslijst / Tool List

Gereedschap	Ø (mm)	Kosten
Ø6.5 HSS boor	6.5	€8.25
Ø3.69 HSS boor	3.7	€6.84
Ø2.529 HSS boor	2.5	€6.26
Ø2.0 HSS boor	2.0	€6.00
Ø5.5 HSS boor	5.5	€7.75
Ø3.2 HSS boor	3.2	€6.60
Ø4.0 HSS boor	4.0	€7.00
Ø0.300000000000004 HSS boor	0.3	€5.15
Ø2.300000000000002 HSS boor	2.3	€6.15
Ø2.3 HSS boor	2.3	€6.15
...	+474	

Uitbesteding / Outsourcing

Categorie: **cnc_frezerij**

Doorlooptijd: 5 werkdagen

Aanbeveling: Grotere verspaner met voldoende machinecapaciteit

Routing:

1. 3/4-assig CNC frezen

Oppervlaktebehandeling Opties

Behandeling	Standaard	Dikte	Kosten
Thermisch verzinken (dompelverzeking)	ISO 1461	45-85 µm	×0.8
Elektrolytisch verzinken	ISO 2081	5-25 µm	×1.0
Bruneren (zwarten)	DIN 50938	1-2 µm	×0.6

Inkoop Specificatie / Purchase Spec

Materiaal: **S235JR Constructiestaal** (EN 10025-2)

Ruw formaat: 426 x 559 x 566 mm (blok)

Ruw gewicht: 1056.12 kg/stuk


Certificaat: EN 10204 2.2

Materiaalprijs: €1.20/kg → €1267.35/stuk

Topology Statistics


Entity	Count
Solids	560
Shells	569
Faces	39330
Edges	206472
Vertices	412944

Component Classification

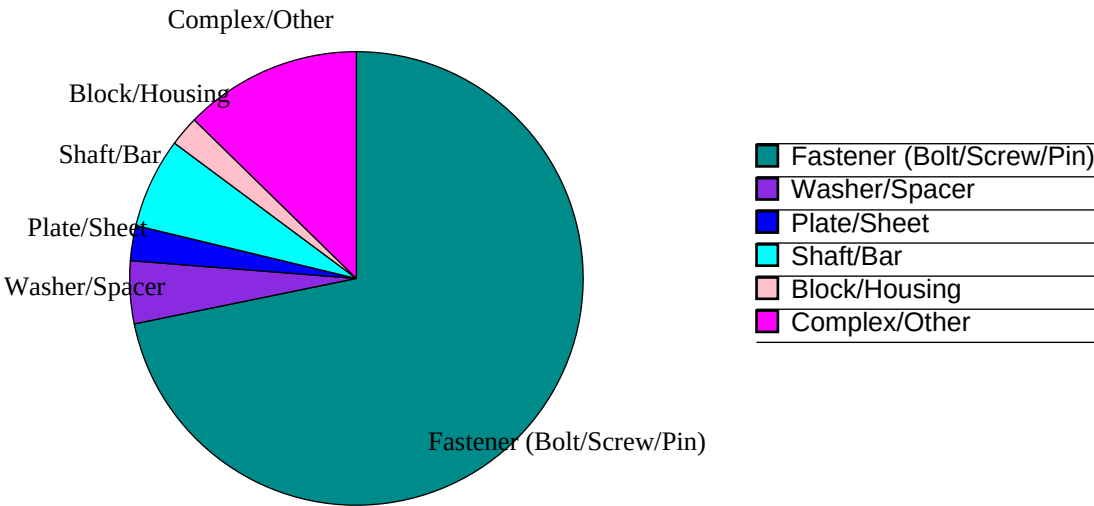


Component Type	Count
Fastener (Bolt/Screw/Pin)	402
Washer/Spacer	25
Plate/Sheet	14
Shaft/Bar	36
Block/Housing	12
Complex/Other	71

Surface Complexity Analysis

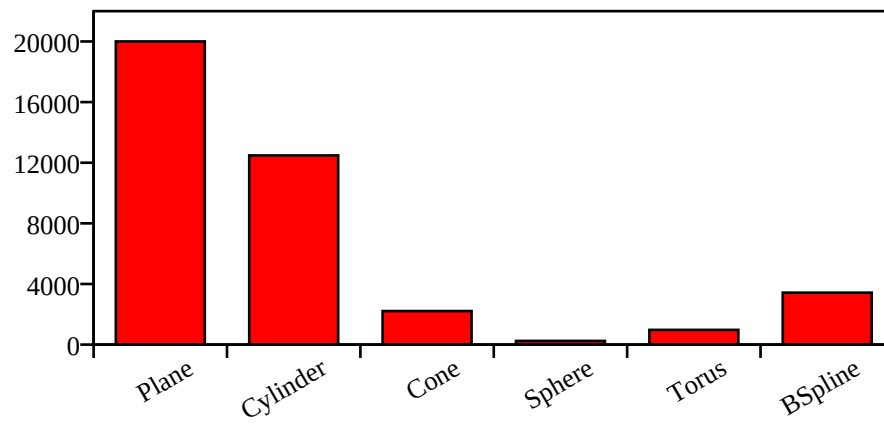

Surface Type	Count
Plane	20001
Cylinder	12479
Cone	2212
Sphere	242
Torus	971
BSpline	3425

Detailed Part Analysis (Grouped)



Part ID: caeec562

Count: 36

Type: Small Component

Dims: 2.5 × 7.0 × 7.0 mm


Vol: 48.7 mm³

Holes: 1x Ø6.5mm, 49x Ø3.7mm, 1x Ø2.5mm

Fits: Ø2.5:H7/h6, Ø3.7:H7/h6, Ø6.5:H7/h6

Threads: 1×M8 (tapped), 49×M4.5 (tapped), 1×M2.5

Edges: 0 chamfers, 2 fillets



Part ID: 8e5190a5

Count: 1

Type: Shaft/Bar

Dims: 55.0 × 58.0 × 392.0 mm


Vol: 32383.3 mm³

Holes: 8x Ø2.0mm, 2x Ø5.5mm, 3x Ø2.5mm, 6x Ø3.2mm, 4x Ø4.0mm, 2x Ø0.3mm, 2x Ø2.3mm

Mass: 0.254kg (steel) / 0.087kg (alu)

Fits: Ø0.3:H7/h6, Ø2.0:H7/h6, Ø2.3:H7/h6, +4 more

Threads: 8×M2, 3×M2.5, 6×M4 (tapped)



Part ID: c9196050

Count: 1

Type: Shaft/Bar

Dims: 50.7 × 50.7 × 524.0 mm


Vol: 42684.4 mm³

Holes: 6x Ø4.0mm, 6x Ø2.0mm, 11x Ø3.2mm, 2x Ø2.5mm, 4x Ø2.3mm, 4x Ø0.3mm, 2x Ø8.0mm

Mass: 0.335kg (steel) / 0.115kg (alu)

Fits: Ø0.3:H7/h6, Ø2.0:H7/h6, Ø2.3:H7/h6, +4 more

Threads: 6×M4, 6×M2, 11×M4 (tapped)



Part ID: 3caf4e60

Count: 1

Type: Shaft/Bar

Dims: 50.7 × 50.7 × 524.0 mm


Vol: 42635.1 mm³

Holes: 3x Ø8.0mm, 6x Ø4.0mm, 6x Ø2.0mm, 9x Ø3.2mm, 2x Ø2.5mm, 4x Ø2.3mm, 4x Ø0.3mm, 2x Ø3.1mm

Mass: 0.335kg (steel) / 0.115kg (alu)

Fits: Ø0.3:H7/h6, Ø2.0:H7/h6, Ø2.3:H7/h6, +5 more

Threads: 3×M8, 6×M4, 6×M2



Part ID: 9419bcbd

Count: 2

Type: Shaft/Bar

Dims: 50.0 × 50.7 × 392.0 mm

Vol: 31428.7 mm³

Holes: 11x Ø3.2mm, 1x Ø2.6mm, 3x Ø2.5mm, 2x Ø0.3mm, 2x Ø2.3mm, 4x Ø4.0mm, 4x Ø2.0mm

Mass: 0.247kg (steel) / 0.085kg (alu)

Fits: Ø0.3:H7/h6, Ø2.0:H7/h6, Ø2.3:H7/h6, +4 more

Threads: 11×M4 (tapped), 1×M2.5, 3×M2.5



Part ID: 6c673770

Count: 5

Type: Shaft/Bar

Dims: 50.0 × 50.7 × 392.0 mm


Vol: 31460.2 mm³

Holes: 9x Ø3.2mm, 4x Ø4.0mm, 4x Ø2.0mm, 1x Ø2.5mm, 2x Ø0.3mm, 2x Ø2.3mm

Mass: 0.247kg (steel) / 0.085kg (alu)

Fits: Ø0.3:H7/h6, Ø2.0:H7/h6, Ø2.3:H7/h6, +3 more

Threads: 9×M4 (tapped), 4×M4, 4×M2



Part ID: e590bda6

Count: 2

Type: Shaft/Bar

Dims: 50.7 × 50.7 × 524.0 mm


Vol: 43208.9 mm³

Holes: 14x Ø3.2mm, 4x Ø4.0mm, 4x Ø2.0mm, 2x Ø2.5mm, 4x Ø2.3mm, 4x Ø0.3mm

Mass: 0.339kg (steel) / 0.117kg (alu)

Fits: Ø0.3:H7/h6, Ø2.0:H7/h6, Ø2.3:H7/h6, +3 more

Threads: 14×M4 (tapped), 4×M4, 4×M2



Part ID: 0bf4a94d

Count: 2

Type: Small Component

Dims: 4.2 × 7.0 × 7.0 mm


Vol: 48.7 mm³

Holes: 1x Ø6.5mm, 49x Ø3.7mm, 1x Ø2.5mm

Fits: Ø2.5:H7/h6, Ø3.7:H7/h6, Ø6.5:H7/h6

Threads: 1×M8 (tapped), 49×M4.5 (tapped), 1×M2.5

Edges: 0 chamfers, 2 fillets



Part ID: 728f30ec

Count: 1

Type: Sheet Metal (Bent)

Dims: 68.0 × 362.0 × 364.0 mm

Vol: 184629.0 mm³


Holes: 8x Ø4.0mm, 8x Ø2.0mm, 11x Ø3.2mm, 6x Ø7.6mm, 6x Ø3.0mm, 2x Ø2.5mm

Sheet: 1.0mm (ISO Std), 14 bends

Mass: 1.449kg (steel) / 0.498kg (alu)

Fits: Ø2.0:H7/h6, Ø2.5:H7/h6, Ø3.0:H7/h6, +3 more

Threads: 8×M4, 8×M2, 11×M4 (tapped)



Part ID: b7fa489e

Count: 1

Type: Sheet Metal (Bent)

Dims: 81.1 × 362.0 × 364.0 mm

Vol: 195628.5 mm³


Holes: 8x Ø4.0mm, 8x Ø2.0mm, 4x Ø8.0mm, 17x Ø3.2mm, 6x Ø7.6mm, 1x Ø4.2mm, 6x Ø3.0mm

Sheet: 1.0mm (ISO Std), 16 bends

Mass: 1.536kg (steel) / 0.528kg (alu)

Fits: Ø2.0:H7/h6, Ø3.0:H7/h6, Ø3.2:H7/h6, +4 more

Threads: 8×M4, 8×M2, 4×M8



Part ID: d1e7c877


Count: 1

Type: Small Component

Dims: 8.6 × 23.5 × 50.0 mm

Vol: 12.5 mm³

Holes: None



Part ID: d2539f7c

Count: 1

Type: Sheet Metal (Bent)

Dims: 49.0 × 364.0 × 496.0 mm

Vol: 185026.1 mm³


Holes: 2x Ø16.0mm, 32x Ø3.2mm, 2x Ø6.6mm, 2x Ø3.5mm, 8x Ø11.5mm, 8x Ø2.5mm, 1x Ø15.7mm, 20x Ø2.0mm, 1x Ø2.6mm, 4x Ø8.0mm, 2x Ø4.1mm, 52x Ø0.6mm, 1x Ø14.0mm, 8x Ø7.6mm, 8x Ø1.6mm

Sheet: 0.8mm (ISO Std), 32 bends

Mass: 1.452kg (steel) / 0.500kg (alu)

Fits: Ø0.6:H7/h6, Ø1.6:H7/h6, Ø2.0:H7/h6, +12 more

Threads: 2×M16, 32×M4 (tapped), 2×M8 (tapped)



Part ID: 2a63d656


Count: 1

Type: Washer/Spacer

Dims: 0.1 × 25.0 × 60.0 mm

Vol: 75.0 mm³

Holes: None



Part ID: ba85634b

Count: 1


Type: Shaft/Bar

Dims: 2.0 × 6.0 × 327.5 mm

Vol: 3930.0 mm³

Holes: None

Mass: 0.031kg (steel) / 0.011kg (alu)



Part ID: c7952b3d

Count: 2


Type: Shaft/Bar

Dims: 2.0 × 6.0 × 453.0 mm

Vol: 5436.0 mm³

Holes: None

Mass: 0.043kg (steel) / 0.015kg (alu)



Part ID: b28fdd0a

Count: 2

Type: Sheet Metal

Dims: 25.0 × 60.0 × 60.0 mm


Vol: 22495.8 mm³

Holes: 4x Ø4.3mm, 1x Ø58.0mm

Sheet: 60.0mm, 0 bends

Mass: 0.177kg (steel) / 0.061kg (alu)

Fits: Ø4.3:H7/h6, Ø58.0:H8/f7



Part ID: 1e784b1b

Count: 1

Type: Sheet Metal (Bent)

Dims: 2.0 × 67.0 × 128.0 mm

Vol: 6296.9 mm³

Holes: 3x Ø3.4mm, 8x Ø4.0mm, 4x Ø2.0mm, 4x Ø3.2mm

Sheet: 8.66mm, 6 bends

Mass: 0.049kg (steel) / 0.017kg (alu)

Fits: Ø2.0:H7/h6, Ø3.2:H7/h6, Ø3.4:H7/h6, +1 more

Threads: 3×M3.5, 8×M4, 4×M2



Part ID: a48613ea

Count: 1

Type: Shaft/Bar

Dims: 15.4 × 23.1 × 152.3 mm

Vol: 18867.8 mm³

Holes: 2x Ø6.0mm, 5x Ø4.0mm, 2x Ø3.2mm

Mass: 0.148kg (steel) / 0.051kg (alu)

Fits: Ø3.2:H7/h6, Ø4.0:H7/h6, Ø6.0:H7/h6

Threads: 2×M6, 5×M4, 2×M4 (tapped)



Part ID: 7512e1cf

Count: 1

Type: Shaft/Bar

Dims: 15.1 × 20.8 × 137.0 mm

Vol: 15165.4 mm³


Holes: 3x Ø0.6mm, 5x Ø6.0mm, 2x Ø10.0mm, 1x Ø4.5mm, 1x Ø3.3mm, 1x Ø3.2mm

Mass: 0.119kg (steel) / 0.041kg (alu)

Fits: Ø0.6:H7/h6, Ø3.2:H7/h6, Ø3.3:H7/h6, +3 more

Threads: 3×M1 (tapped), 5×M6, 2×M10

Edges: 2 chamfers, 1 fillets



Part ID: b770d4ee

Count: 1

Type: Complex Part

Dims: 4.9 × 36.0 × 56.8 mm

Vol: 4537.9 mm³

Holes: 2x Ø8.0mm, 1x Ø3.4mm, 4x Ø4.0mm, 2x Ø6.0mm

Mass: 0.036kg (steel) / 0.012kg (alu)

Fits: Ø3.4:H7/h6, Ø4.0:H7/h6, Ø6.0:H7/h6, +1 more

Threads: 2×M8, 1×M3.5, 4×M4

... and 173 more unique parts

Hole Summary by Diameter

Diameter (mm)	Count
0.00	2
0.10	1
0.10	1
0.10	1
0.10	1
0.20	59
0.20	1
0.30	8
0.30	2
0.30	1
0.30	145
0.30	8
0.30	16
0.32	64
0.35	26
0.35	52
0.40	2
0.40	2
0.40	1
0.40	1
0.40	2
0.40	383
0.40	1
0.40	1
0.50	32
0.54	1
0.56	5
0.56	312
0.56	5
0.56	5
0.56	10
0.56	5
0.60	1
0.60	1
0.60	1
0.60	1
0.60	2
0.60	1

0.60	1
0.60	1
0.60	2
0.60	4
0.60	1
0.60	4
0.60	1
0.60	1
0.60	3
0.60	3
0.60	2
0.60	1
0.60	3
0.60	1
0.60	1
0.60	332
0.60	3
0.60	1
0.60	4
0.60	1
0.60	2
0.60	1
0.60	2
0.60	2
0.70	1
0.75	2
0.80	28
0.80	1
0.90	2
0.96	1
0.98	5
0.98	5
0.98	5
0.98	5
0.98	5
0.98	5
1.00	1
1.00	1
1.00	4
1.00	1
1.00	1

1.00	1
1.00	4
1.00	570
1.00	7
1.00	3
1.00	2
1.00	1
1.00	2
1.00	1
1.06	312
1.10	32
1.20	2
1.20	56
1.20	1
1.20	1
1.20	1
1.20	1
1.20	1
1.38	1
1.40	2
1.40	2
1.42	1
1.50	1
1.50	1
1.50	10
1.50	1
1.59	12
1.59	132
1.60	1
1.60	1
1.60	72
1.60	2
1.60	1
1.60	1
1.60	1
1.60	1
1.60	1
1.73	1
1.80	2
1.80	2
1.80	2

1.80	4
1.87	65
1.87	13
2.00	1
2.00	1
2.00	1
2.00	21
2.00	1
2.00	1
2.00	2
2.00	3
2.00	2
2.00	16
2.00	4
2.00	2
2.00	571
2.00	29
2.00	8
2.00	13
2.00	2
2.00	1
2.00	1
2.00	1
2.00	1
2.00	1
2.00	1
2.05	2
2.10	5
2.13	1
2.20	4
2.21	1
2.30	8
2.30	8
2.30	16
2.35	296
2.35	577
2.35	273
2.35	374
2.35	80
2.40	6
2.40	17

2.40	12
2.40	6
2.40	6
2.40	2
2.43	2
2.46	37
2.50	69
2.50	2
2.50	2
2.53	173
2.60	2
2.60	16
2.60	2
2.64	1
2.69	2
2.70	2
2.70	27
2.71	1
2.80	11
2.85	5
2.90	15
2.93	38
3.00	4
3.00	1749
3.00	196
3.00	2
3.00	2
3.00	6
3.00	1
3.05	2
3.10	97
3.20	1
3.20	1
3.20	320
3.20	1
3.20	1
3.20	2
3.20	10
3.25	6
3.30	80
3.30	4

3.33	2
3.40	73
3.41	1
3.41	4
3.45	4
3.46	1
3.50	16
3.50	20
3.50	1
3.50	1
3.60	25
3.69	1862
3.73	2
3.77	1
3.80	10
3.82	1
3.83	1
4.00	1
4.00	1
4.00	1
4.00	1
4.00	4
4.00	1
4.00	2
4.00	10
4.00	90
4.00	538
4.00	4
4.00	5
4.00	2
4.00	1
4.00	1
4.00	1
4.10	3
4.20	1
4.20	9
4.20	2
4.30	13
4.40	2
4.40	1
4.50	7

4.50	2
4.50	3
4.55	4
4.60	49
4.60	1
4.79	1
5.00	61
5.00	1
5.00	1
5.04	2
5.06	1
5.20	4
5.20	1
5.20	1
5.36	2
5.40	3
5.50	120
5.50	32
5.53	1
5.60	2
5.66	1
5.70	13
5.70	85
5.80	4
5.80	11
5.80	4
6.00	1
6.00	1
6.00	1
6.00	158
6.00	15
6.00	1
6.00	1
6.03	1
6.20	6
6.40	13
6.40	1
6.40	2
6.50	8
6.50	52
6.60	2

6.68	4
6.80	26
6.80	1
6.90	2
7.00	81
7.00	4
7.10	3
7.25	1
7.31	2
7.50	1
7.60	1
7.60	2
7.60	4
7.60	4
7.60	10
7.80	3
7.97	2
7.97	2
8.00	1
8.00	1
8.00	1
8.00	1
8.00	5
8.00	85
8.00	9
8.00	1
8.00	4
8.04	1
8.10	2
8.20	1
8.25	2
8.35	2
8.35	2
8.40	2
8.40	2
8.44	2
8.50	2
8.60	2
8.68	2
8.68	2
9.00	2

9.00	69
9.00	1
9.10	1
9.10	1
9.10	1
9.10	1
9.10	4
9.20	2
9.38	2
9.60	1
9.68	32
9.70	2
10.00	1
10.00	139
10.00	2
10.40	2
10.50	3
10.89	2
11.00	5
11.00	2
11.50	3
11.50	3
11.50	3
11.59	1
12.00	9
12.00	1
12.01	1
12.10	1
12.10	1
12.30	2
12.63	2
12.80	4
13.00	2
13.00	6
13.10	1
13.50	1
13.90	4
14.00	1
14.00	3
14.10	1
14.20	2

14.50	2
14.60	1
14.60	4
15.00	1
15.00	2
15.30	4
15.70	1
15.90	4
16.00	12
16.00	1
16.00	1
16.00	1
16.00	1
16.00	1
16.70	2
16.72	2
17.00	3
18.00	3
18.00	2
18.00	2
18.00	1
18.40	2
18.50	2
18.65	1
18.80	1
19.00	1
19.00	2
19.00	6
19.00	4
19.00	2
19.10	4
19.20	1
19.60	1
20.00	30
20.30	4
20.40	1
20.44	2
21.60	1
22.00	6
22.40	3
23.00	3

24.00	3
24.08	1
24.50	5
25.00	11
25.29	2
26.00	2
26.90	2
28.00	1
28.00	1
28.00	3
30.00	5
31.00	3
31.00	10
31.60	1
32.00	2
33.00	3
33.48	12
34.00	4
35.00	1
36.00	3
37.00	7
38.00	2
39.00	8
41.29	1
41.29	1
42.00	2
42.29	2
42.75	1
46.25	2
46.88	1
47.00	1
48.00	1
49.50	1
50.38	1
50.41	1
53.00	1
58.00	2
76.00	4
80.00	4
137.74	2
141.00	2

142.00	2
254.00	2

