


INPUT POWER

Input Power sources are :


- Micro USB 5V to Wemos Lolin
- 28 V AC to 5 V DC via switching regulator
- Micro USB on Wyostat (only Power, no Data)

When using option "b" or "c", the micro USB cable MUST be removed to prevent power conflicts.




When using option "a", the Power Selector Header J16 must be in OFF position.

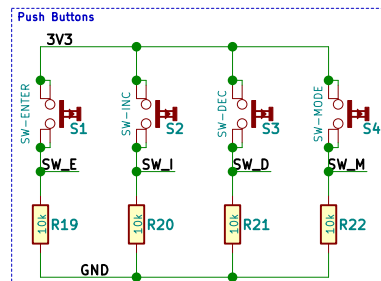


I2C HEADER




I2C interface for external connections to sensors etc.

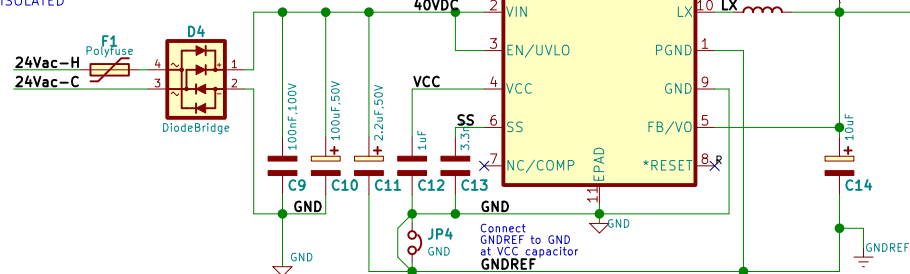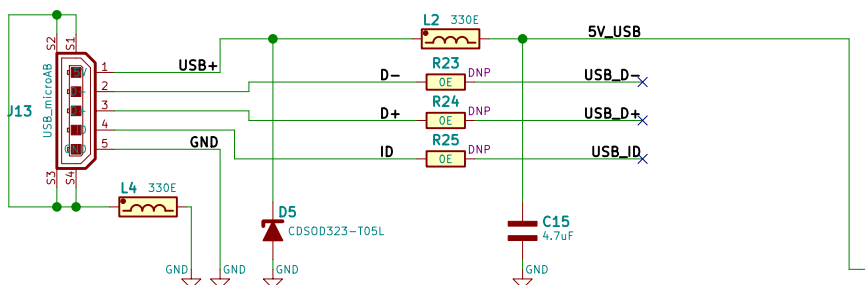

TRIAC outputs

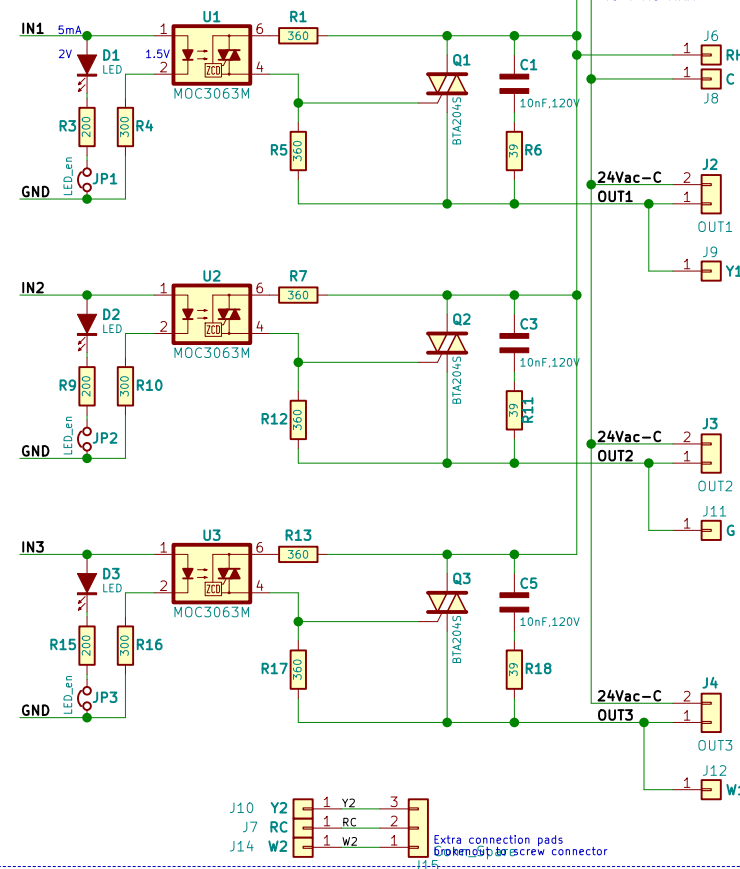

I2C RTC



<https://github.com/wyolum/wyostat>

WyoLum

Sheet: /

File: wyostat.sch

Title: WYOSTAT

Size: A4

Date: 2018-04-05

KiCad E.D.A.	kiCad 5.0.0-rc2-dev-unknown-c867de563ubuntu17.10.1
--------------	--

Rev: rev 1

Id: 1/2



open source
hardware



Id: 2/2