

Table 1. Ordering information ...continued

Type number	Package	Temperature range	Name	Description	Version
74HCT240D	SO20	-40 °C to +125 °C		plastic small outline package; 20 leads; body width 7.5 mm	SOT163-1
74HCT240DB	SSOP20	-40 °C to +125 °C		plastic shrink small outline package; 20 leads; body width 5.3 mm	SOT339-1
74HCT240PW	TSSOP20	-40 °C to +125 °C		plastic thin shrink small outline package; 20 leads; body width 4.4 mm	SOT360-1
74HCT240BQ	DHVQFN20	-40 °C to +125 °C		plastic dual-in-line compatible thermal enhanced very thin quad flat package; no leads; 20 terminals; body 2.5 × 4.5 × 0.85 mm	SOT764-1

4. Functional diagram

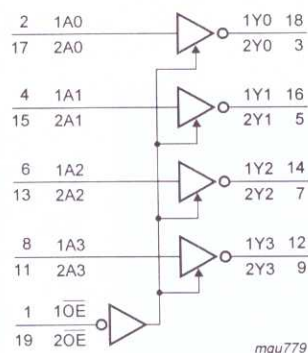


Fig 1. Logic symbol

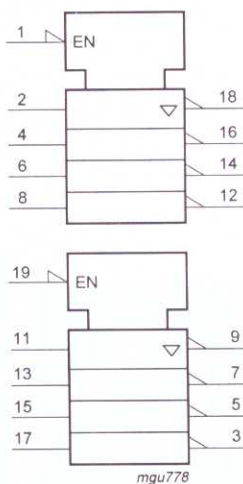


Fig 2. IEC logic symbol

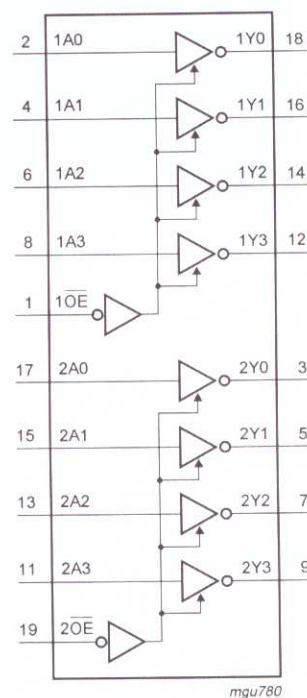


Fig 3. Functional diagram