



ST--TI FreeRTOS scenario architecture


Basic processing

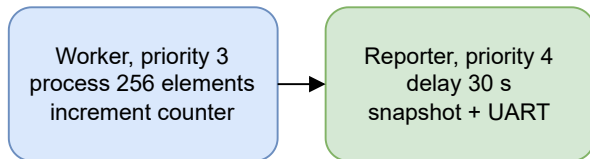

Cooperative scheduling

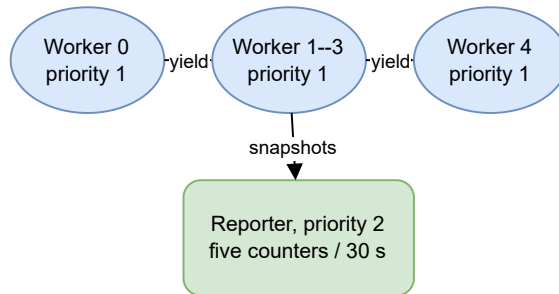

Preemptive scheduling

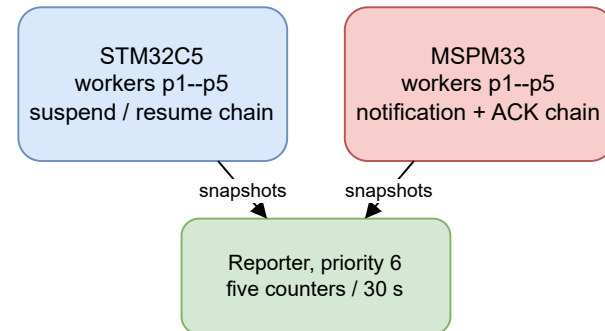

Common settings: 1 kHz tick, preemption enabled, time slicing disabled, dynamic allocation, 8 KiB FreeRTOS heap.
Runtime clocks differ: STM32C5 144 MHz; MSPM33 32 MHz.