



ST--TI low-level-driver functional scenario flows


ADC: timer-triggered conversion




GPIO: periodic toggle

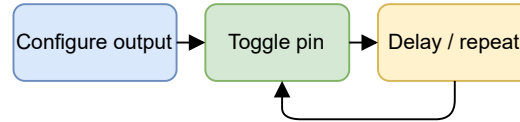


UART printf: formatted output




UART loopback: transmit and compare




I2C polling: controller and target



I2C interrupt: FIFO event service



I2C DMA: controller and target



SPI DMA: master and slave

