



60V Version




5V Version

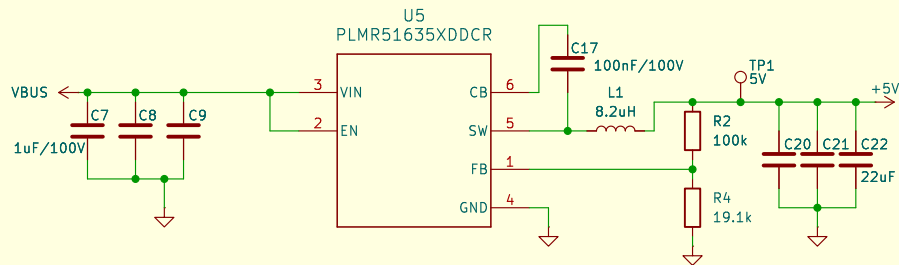


3.3V

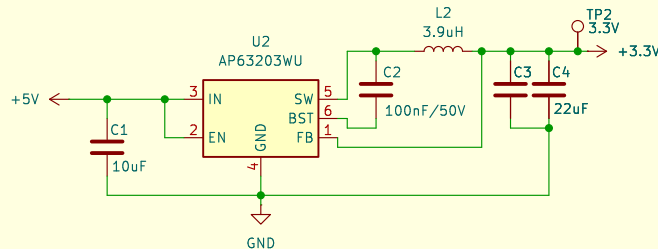


1.2V

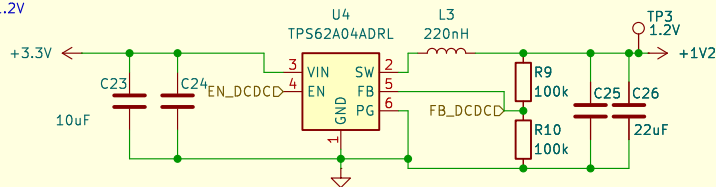

2.5V

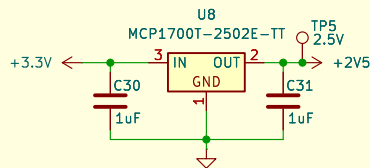

3.3VA

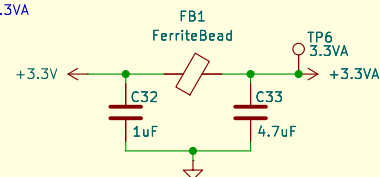

Sheet: /Power supply/
File: power_supply.kicad_sch

Title:


Size: A4

Date:


KiCad E.D.A. 9.0.5

Rev:


Id: 2/7

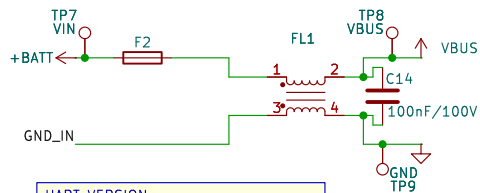



UART VERSION



CAN VERSION



60V Version use 16V for 5V version



Sheet: /Connection/
File: connection.kicad_sch





Title:


Size: A5
KiCad E.D.A. 9.0.5

Date:


Rev:

Id: 3/7

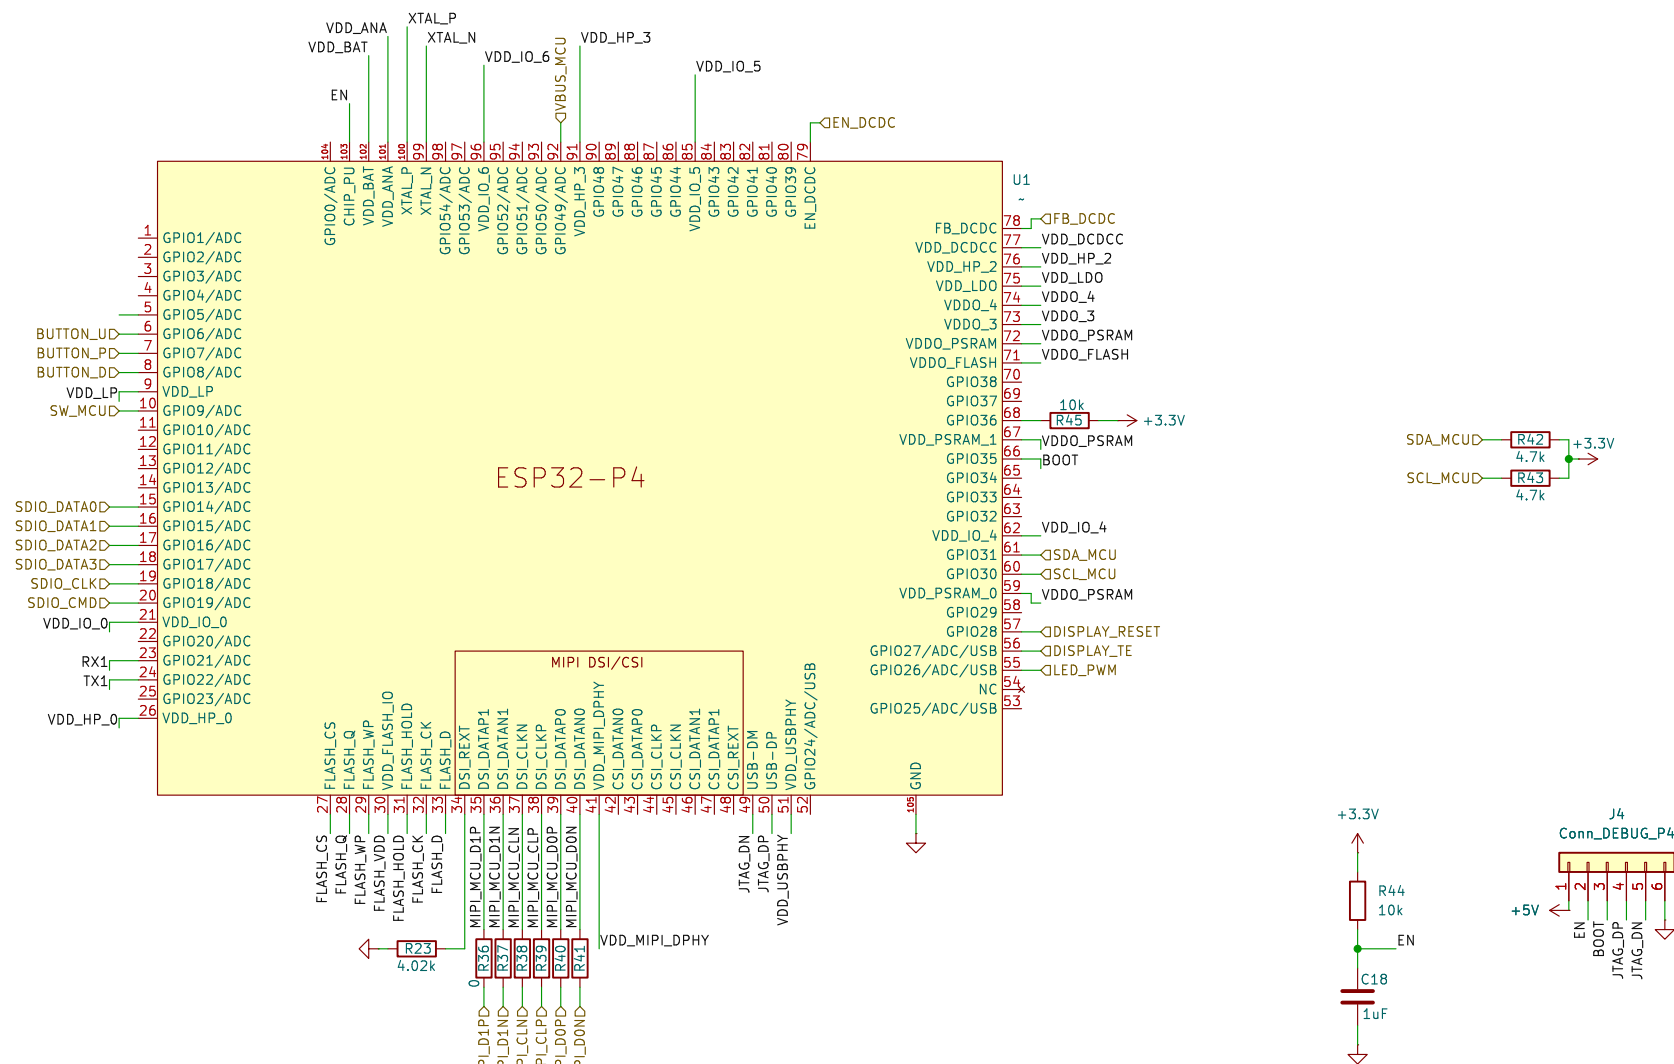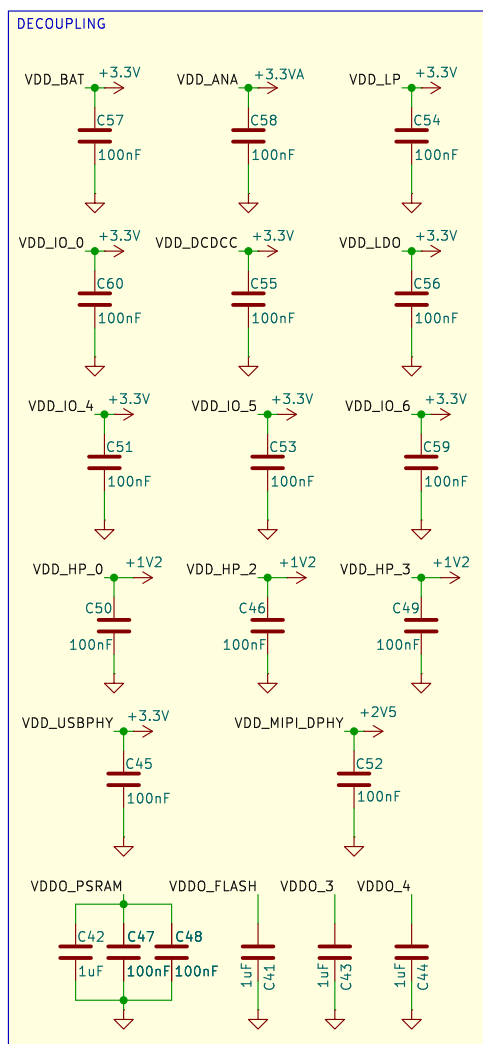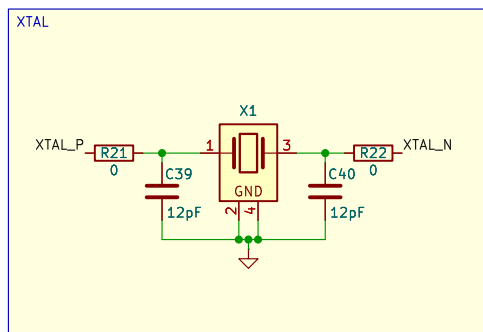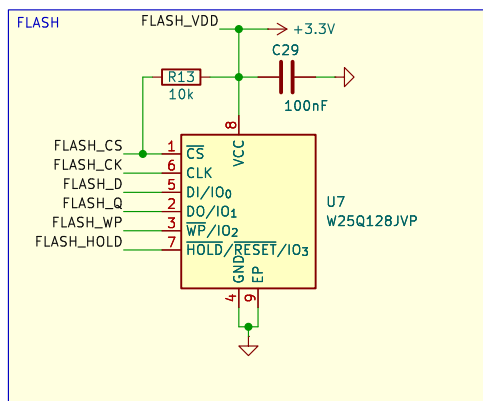


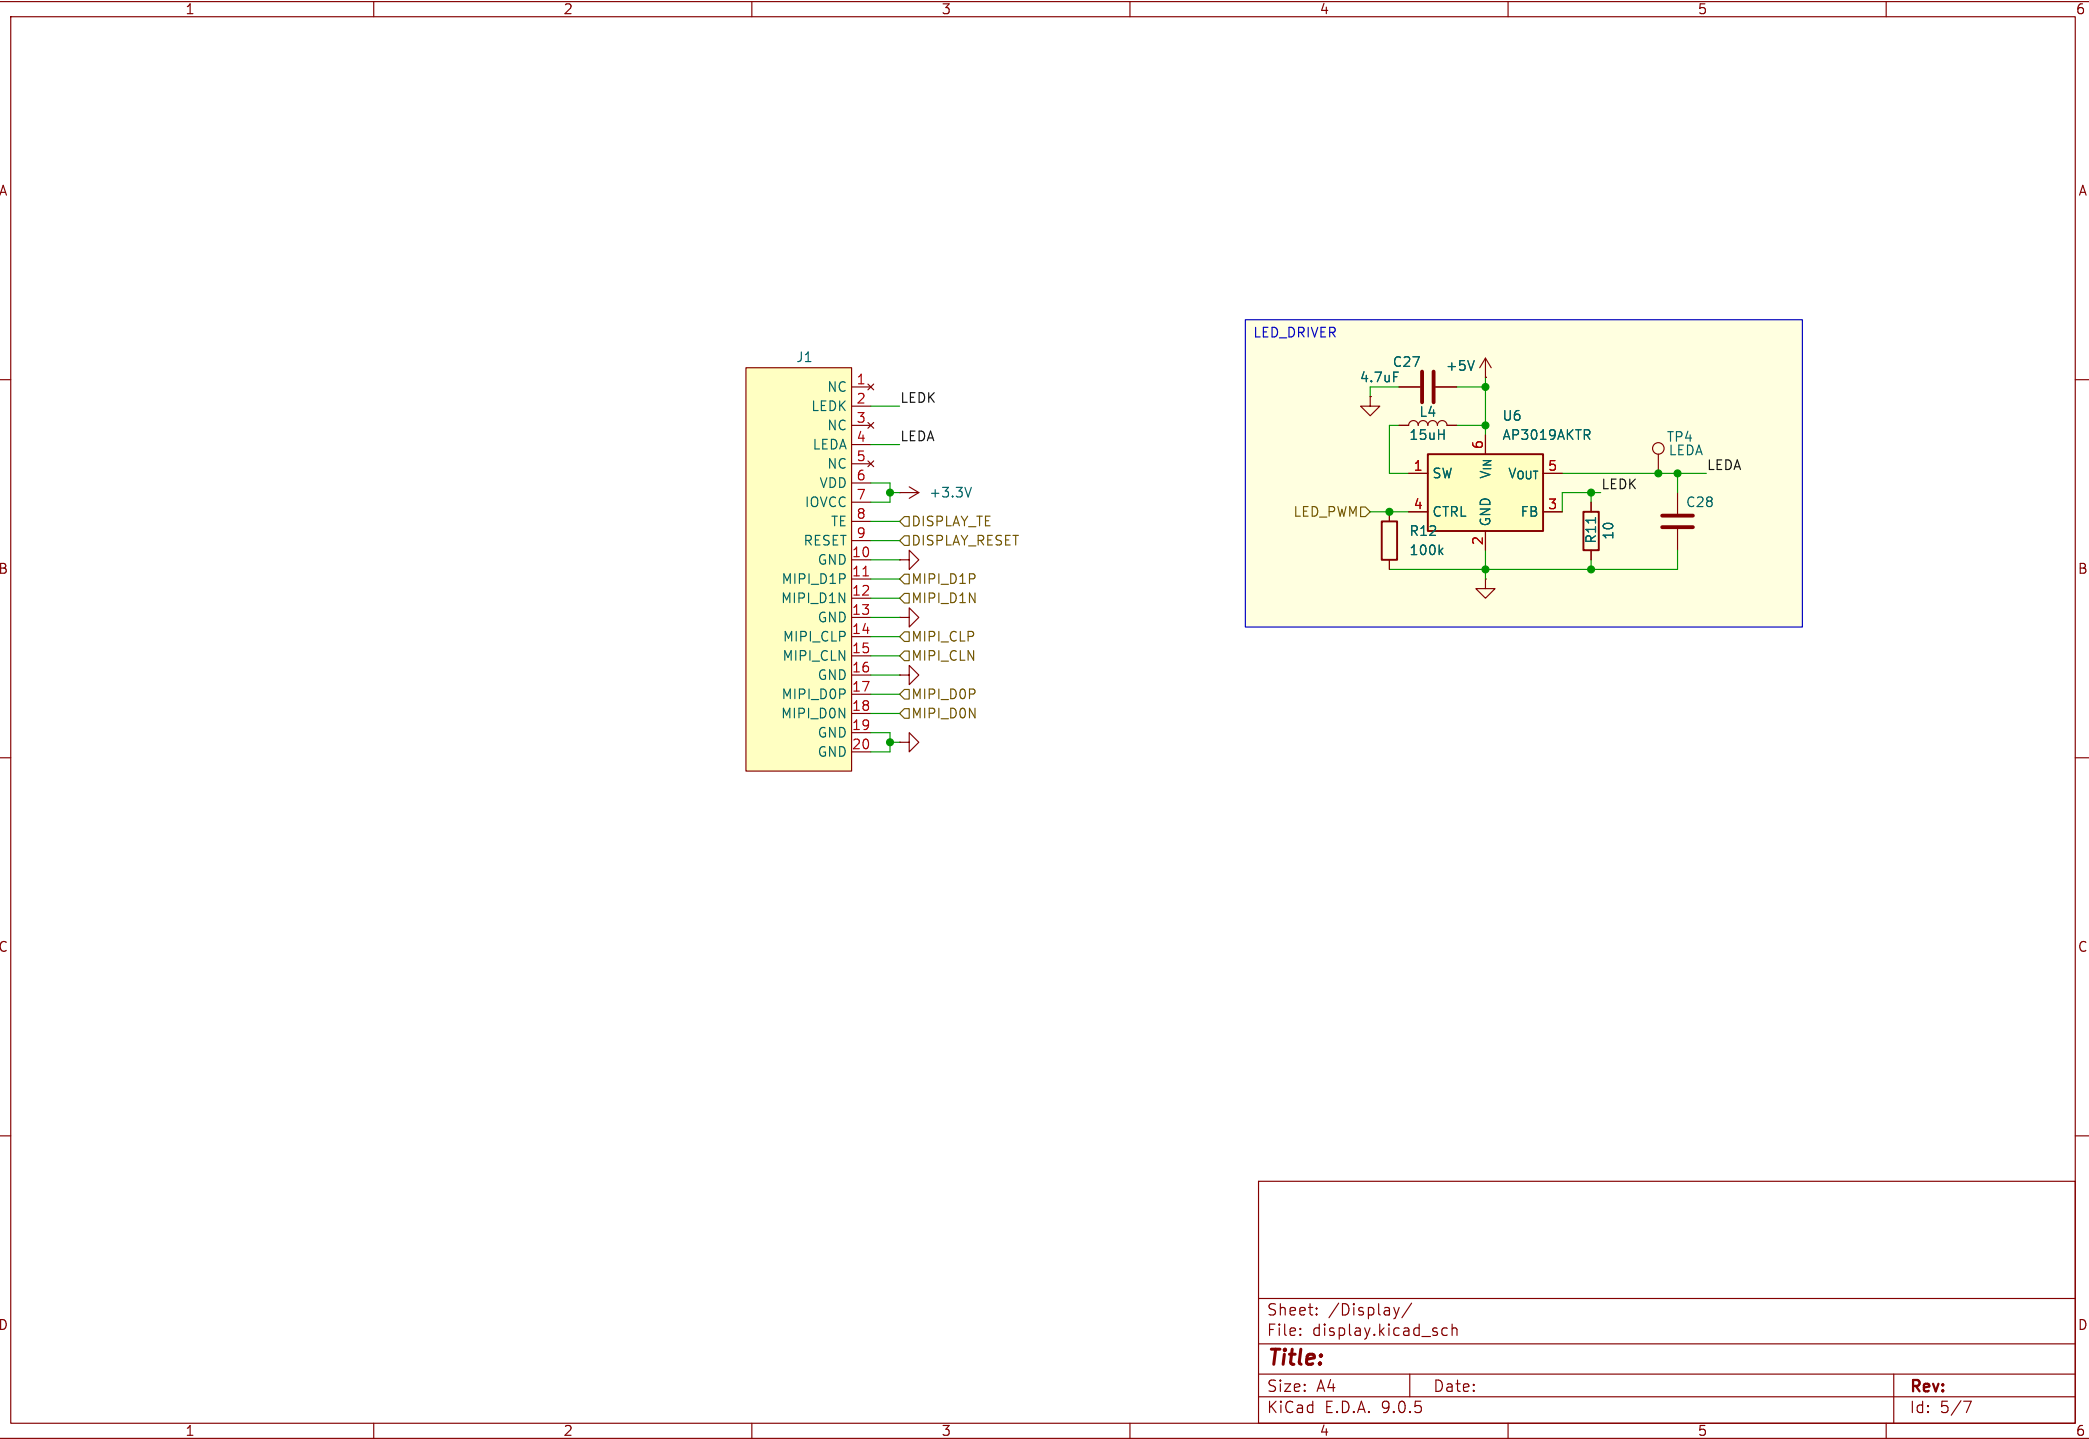


BUTTONS

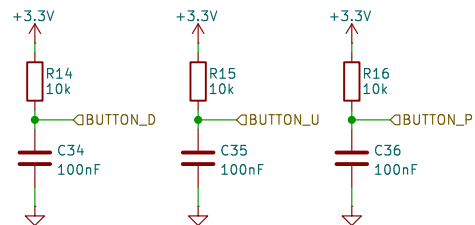


CAN

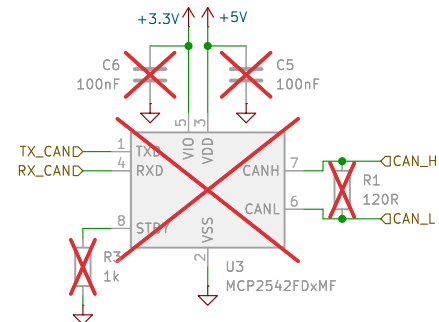


UART

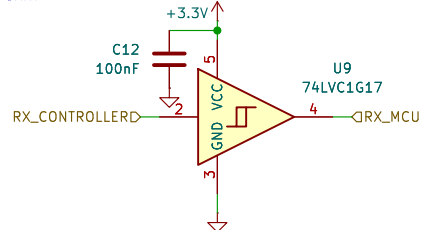


SW

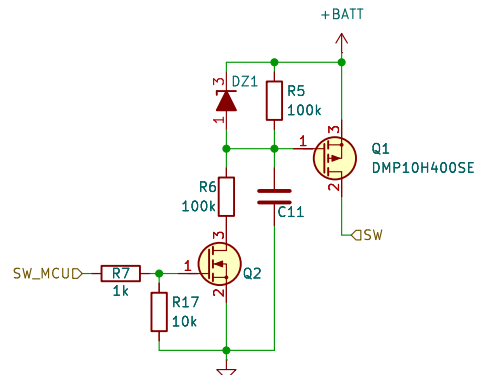


VIN



Temperature

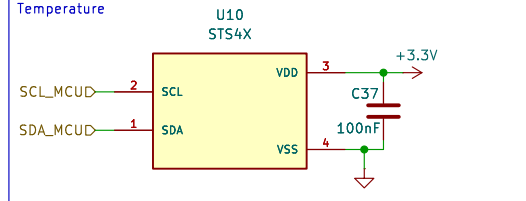

ALS

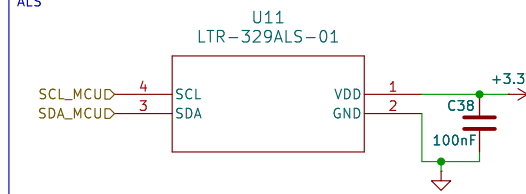

Sheet: /10/
File: io.kicad_sch

Title:

Size: A4
KiCad E.D.A. 9.0.5

Date:

Rev:

Id: 6/7

