


Train & Engine Safety Rule Book

April 2023





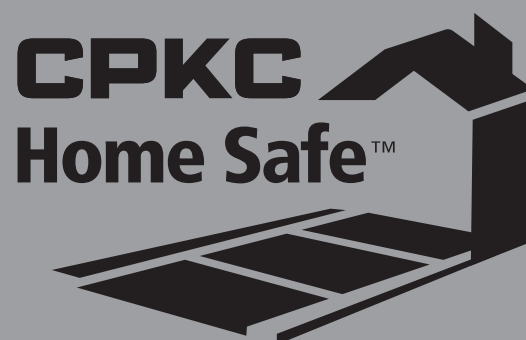

Home Safe™ starts here

It is a commitment to be vigilant about personal safety and the safety of co-workers.

Starting with the first minute every day, my:

Commitment

- I don't want to be injured
- If I am at risk I expect a co-worker to let me know
- I don't want a co-worker injured
- I have the courage to speak up if I see a hazard or someone at risk



100% Compliance

Accountability

Courage

Throughout every day, I will:

Action

- Give a heads up
- Offer and ask for support (help)
- Warn people I believe are at risk
- Identify, report, and remove hazards



Mutual Respect

Partnering

Coaching

The FAB 4

Four principles of proper body mechanics that help keep you safe at work and home.

4

Contract your Shoulders

Slightly contract the muscles allowing the shoulder blades to be positioned down and away from ears.

2

Bend at the knees

Stick your butt out. Make sure your knees and toes are facing the same direction.

3


Bend at the hips

Hinge at the hips and slightly contract your core muscles.

1

Wide stance

A wide base of support can be: on two feet, on two knees, one knee and one foot or a lunge stance with one arm resting on the leg.

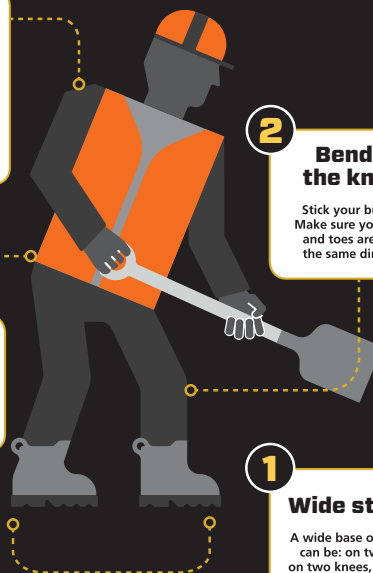

FLEX STRETCH PREVENT

Stretches that should be completed before and during your work day.

The daily stretches below are to be performed as a part of the Flex Stretch Prevent Program. You may perform additional stretches if you choose. Hold stretches for 5 – 10 seconds and continue to breathe throughout, if you are holding your breath you have gone too far. It is important to lightly engage your core muscles at all times when stretching, do not bounce or make any quick, jerky movements. Stretching should be a slow and gentle movement where you may feel a mild discomfort but you should not stretch to the point of pain.

1

Power Squats

Repeat 15 consecutive power squats. While keeping your head and chest up, reach forward while sitting back keeping your heels on the ground and lower your legs as if you are about to sit back in a chair. Do not let your knees go past 90° and keep your knees behind your toes.



2

Arm Circles

Keeping palms facing up, do 10 quick small circles forward and 10 backwards. Repeat with 10 large circles forward and 10 large circles backwards. As an option to increase mobility, add a shoulder shrug to your arm circles.



3

Anti-slouch Stretch

At the same time, bring your chin down and extend the crown of your head up towards the sky, gently contracting the core to prevent arching of the back. Hold this position for 10 seconds, relax and repeat once.



4

Reach Forward and Across

While keeping your back heel on the ground and foot pointed forward, take a large step forward in a lunge position. You may choose rest your hands gently on your front leg. Hold this position for 10 seconds, alternate twice on each side.



5

Hamstring Stretch

Step slightly forward with one leg placing the heel on the floor, pointing the toe upward, causing this leg to be straight. Bend the back knee, hinge at the hips, with your back foot pointed forward; lead with the chest toward the toes to keep the spine in neutral. If needed the front heel can be placed on a low step or you can hold onto a steady object for support. Slowly progress this stretch for 10 seconds, alternating twice on each side.



Contents

Organizing the Information	4
CORE Safety Rules	5
Train & Engine Safety Rules and Safe Work Procedures	8
T-0 Job Briefings	8
Safe Work Procedure: Job Briefings	8
T-1 Air Hoses, Handling	9
Safe Work Procedure: Coupling Air Hoses.....	9
Safe Work Procedure: Opening Angle Cocks	9
Safe Work Procedure: Opening an angle cock or “dumping the air” to an uncoupled hose	10
Safe Work Procedure: Uncoupling Air Hoses	10
T-4 Vehicles Used for Company Business.....	10
T-5 Aligning Drawbar / Coupler.....	11
Safe Work Procedure: Aligning Coupler with Backwards or Forward Facing Method	11
T-6 Coupling / Uncoupling.....	11
T-7 Knuckle Replacement	12
Safe Work Procedure: Replacing Knuckles	12
T-8 Crossing Over or Between Equipment.....	12
T-9 Derails	13
T-11 Entraining and Detraining Equipment.....	13
Safe Work Procedure: Entraining moving equipment.....	14
Safe Work Procedure: Detraining moving equipment	14
T-13 Fusees.....	15
Safe Work Procedure: Fusees	15
T-14 Hand Brakes.....	16
T-19 On or About Locomotives	17
T-20 On or About Tracks.....	17
T-21 Personal Protective Equipment.....	18
T-22 Personal Protective Equipment Chart	20
T-23 Restricted / Close Clearances	20
T-24 Riding Equipment.....	21
T-26 Switches	22
Safe Work Procedure: Cleaning Switches - Winter Months.....	22
T-27 3-Point Protection	23
Safe Work Procedure: Applying 3-Point Protection.....	23
Safe Work Procedure: Releasing 3-Point Protection	23
Safe Work Procedure: Applying 3-Point Protection in Remote Control Locomotive Service (RCLS / RCO).....	24
T-28 Avoiding Slips, Trips or Falls	24

Organizing the Information

The Train & Engine Safety Rule Book is organized into two main sections:

Section I:

Core Safety Rules: These are common rules to all functions and must be complied with and enforced at all times.

Section II:

Safety Rules: These are function specific rules that must be complied with and enforced at all times. They are written to address the work of Train & Engine employees.

Safe Work Procedures: These procedures outline the steps to safely perform the task. Safe work procedures must be complied with at all times.

Personal Protective Equipment (PPE) Chart: This chart has been created to assist the user in determining the appropriate PPE that is required based on the task to be performed.

CORE Safety Rules

1. Rights and Responsibilities

All employees must make certain that:

- Job tasks are performed only by individuals who are qualified and authorized.
- Job briefings/task assessments are conducted before performing work and when activity and/or conditions change.
- We advise and redirect to safe work practices anyone observed performing an unsafe act.
- We immediately inform each other of unsafe conditions, correct/protect it and report it to a supervisor.
- Accidents, incidents, including injuries, and related information are immediately reported to a supervisor.
- Warning signs, posted instructions, placards, and/or barriers marking restricted areas and lockout tagout areas are displayed and complied with at all times.
- We do not participate in horseplay or physical altercations while on Company property or participating in Company activities.
- One person does not engage in work activity that by legislation or Company policy requires two or more people.
- A copy of the function specific safety rules must be accessible while on duty.
- We do not possess or use a firearm on Company property unless authorized by CPKC Police Services.

2. Substance Abuse

- Inappropriate substance use is prohibited as identified in *CPKC Drug & Alcohol Policies*.
- Do not smoke/use electronic cigarettes in company buildings, vehicles, and machines.
- For more information see *CPKC HR Policy*.

3. Non-CPKC Personnel

Employees responsible for non-CPKC personnel must:

- Understand the terms of the *Minimum Safety Requirements for Contractors working on CPKC property*, follow access control procedures, and ensure they;
 - Receive a site-specific safety orientation and job briefing.
 - Wear PPE according to location-specific requirements.
 - Do not foul track without proper protection.
 - Have a Contractor Site Safety Plan/Emergency Information Sheet.
 - Have appropriate identification.

4. Emergencies and Derailments

- Follow all notification procedures as outlined in location-specific Emergency Response Plans.
- Approach an emergency or a derailment site only when safe to do so.

- When arriving at an emergency site, contact the On-Scene Response Coordinator or Person-In-Charge for a job briefing and follow all procedures outlined in the job briefing.
- Following an accident or incident, immediately notify a supervisor/dispatcher and do not contact human remains, blood, or other fluids.

5. Fire Safety

- Maintain unrestricted access to, and be familiar with the location of, fire extinguishers, alarm boxes, exit aisles, circuit breakers, fuse panels, emergency exits and local emergency response plans.
- Immediately replace or report any defective, discharged or missing fire extinguishers.
- Store flammable and combustible material away from ignition sources.
- When qualified, use proper grounding and bonding techniques to prevent static electrical charge when dispensing or transferring flammable liquids.
- Do not leave open flames unattended.
- Dispose of flammable or combustible materials according to established Company guidelines.
- Upon discovery of a fire, if safe to do so, extinguish the fire. Employees must immediately activate the fire alarm (where available), and promptly report the fire to supervisor, dispatcher and/or proper authority.

6. Work Environment

- Keep all work areas clean, orderly, and free from clutter and debris.
- Must properly dispose of refuse in appropriate and approved receptacle or waste bin.
- Employees who use needles, lancets and medical sharps must properly dispose of them in sharps containers, if provided, or remove them from company property for disposal, if not provided. Do not throw needles, lancets, and medical sharps in company trash.
- Use approved products to wash equipment, clothing, or floors.
- Do not use compressed air or gases to remove debris from body or clothing.
- Do not walk under suspended loads.
- Work materials must be kept neatly and not stored above shoulder height unless the area is designed for palletized equipment/materials with a specified load limit and a forklift is utilized.
- Walkways must be kept clear to eliminate tripping hazards.

7. Vehicles, Materials, Equipment, and Tools

- Operate, maintain, and repair vehicles, equipment, tools, and materials only when qualified, properly licensed and authorized.
- Use CSA B376 or equivalent UL / ULC (CAN) or Department of Transportation (DOT) (US/Mexico) approved, properly marked containers when storing or transporting flammable liquids or materials.
- Use approved tools, equipment, and materials for the purpose(s) intended.
- Do not modify or override safety devices or remove safety guards.

- Maintain, repair, and store equipment according to prescribed instructions.
- Inspect all vehicles, equipment, tools, and related safety devices for unsafe conditions before use.
- Repair or tag and remove from service if defective.
- Use three-point contact when getting on or off any equipment, machinery, ladder, or vehicle.
- Face the vehicle or equipment/track unit when getting on or off.
- Ventilate exhaust when operating internal-combustion equipment inside buildings or enclosed structures.

8. Office Safety

- When sitting in a chair, keep all chair legs or casters on the floor.
- When not in use, chairs shall be kept pushed in to keep walkways and workspaces clear.
- Roller style chairs are only allowed at workstations, training, and meeting/office rooms.
- Fixed leg chairs are required at ready room and lunch tables.
- Use only commercially available stepstools that meet CSA standards (CAN)/ANSI Standards (US/Mexico) to access elevated locations.
- Ensure that desk and file cabinet doors and drawers are closed when not in use.
- When ascending or descending flights of stairs employees must utilize handrails.

9. Use of Electronic Devices

For Employees governed by GCOR/OTS or CROR refer to the applicable operating rules and related system special instructions.

For employees not governed by GCOR/OTS or CROR refer to the *CPKC Use of Electronic Devices Procedure* for applicable instructions.

Train & Engine Safety Rules and Safe Work Procedures

T-0 Job Briefing

1. Before performing any job, a job briefing led by the foreman/conductor must be held to ensure that all employees involved have a clear understanding of:
 - The task to be performed;
 - Your individual responsibility; and
 - Situational awareness concerns

Additional verbal job briefings must be carried out as necessary, while the work progresses or as the situation changes.

Safe Work Procedure: Job Briefings

Crew members must ensure they are aware of conditions that will affect the safe operation of movements. Employees must:

- Ensure all operating bulletins and notices are read and understood;
- Obtain, read and discuss operating authorities as required;
- Confirm proper designation of movement on TGBO and all operating authorities;
- Identify presence of dimensional, speed restrictions and special dangerous cars;
- Ensure proper documentation for all dangerous goods/hazardous materials;
- Discuss and review items affecting the territory the movement will operate over; and
- Obtain permission to depart and confirm routing and limits of authority, including location of first restriction.

To ensure all crew members maintain awareness of conditions that will affect the safe operation of the movement enroute they must verbally discuss between themselves:

- Environmental and crew fatigue assessments;
- Fixed signals encountered;
- Operating restrictions en-route;
- Set-off / Set-out and lifts/pick-ups prior to reaching work location and ensure proper marshalling;
- Proper train speed;
- Documentation;
- Transfer requirements if relieved enroute; and
- Proper securement of cars set out.

At the final terminal or end of shift ensure crew members:

- Discuss arrival and yarding instructions;
- Ensure proper securement of the movement;
- Report any equipment car or locomotive defects or any needed supplies; and
- Confirm documentation and details of enroute and supplemental work performed is reported.

T-1 Air Hoses, Handling

1. Reaching over a drawbar to open an angle cock is prohibited.
2. You may reach over a drawbar to close an angle cock provided the angle cock can be reached without leaning on the drawbar or coupler and no part of your body becomes exposed to any pinch point.
3. Turn your head away from the glad hands when air hoses are being uncoupled.
4. Never kick, strike at, or jostle the air hose(s) to stop a leak.
5. Treat all air hoses and angle cocks as if they are under pressure.
6. When separating equipment with a charged brake pipe:
 - close the angle cock on the equipment to be moved;
 - leave the angle cock open on the standing equipment;
 - lift the operating lever to release pin;
 - separate the equipment; and
 - observe and communicate to your crew that the equipment left standing is in emergency.



Safe Work Procedure: Coupling Air Hoses

- Step 1:** Ensure equipment is secure, if equipment is attached to a locomotive, ensure 3-point protection is in place.
- Step 2:** Step between the cars. Keeping one foot outside the rail whenever possible.
- Step 3:** Make sure that both glad hands have gaskets.
- Step 4:** Bend at the knees and hips while maintaining a neutral spine (i.e. keeping your lower back, mid-back and neck curves in proper alignment) grasp the air hose nearest you firmly behind its glad hand and bend it upward.
- Step 5:** Grasp the hose farthest away and pull it toward the bent hose.
- Step 6:** Match the glad hands into opposite contoured slots and push them downward.
- Step 7:** Make certain that the glad hands are seated.
- Step 8:** With your head turned away, gradually open the angle cock.

Safe Work Procedure: Opening Angle Cocks

- Step 1:** Ensure 3-point protection is in place.
- Step 2:** With your head turned away, gradually open angle cock, bracing hose against leg.
- Step 3:** If you hear an air leak, close both angle cocks and make sure there is no pressure in the hoses before adjusting or repairing the leak.

Safe Work Procedure: Opening an angle cock or “dumping the air” to an uncoupled air hose

- Step 1:** Ensure 3-point protection is in place.
- Step 2:** Grasp the hose at the glad hand clear of the vent port.
- Step 3:** Brace the glad hand firmly against your thigh just above the knee.
- Step 4:** Turn your face away from the glad hand before slowly opening the angle cock.

Safe Work Procedure: Uncoupling Air Hoses

- Step 1:** Ensure 3-point protection is in place.
- Step 2:** Close both angle cocks.
- Step 3:** Crouching down, firmly grasp each glad hand with your hand near the coupling.
- Step 4:** With your arm extended and with a quick motion, pull upward on the glad hands.

T-4 Vehicles Used for Company Business


1. Inspect vehicles for unsafe conditions before use. Repair or tag and remove from service if defective.
2. Prior to operation of a vehicle the driver must conduct a walk around of the vehicle to identify any obstacles, clearance restrictions, or adjacent vehicles that may interfere with executing a safe movement. When backing up use a spotter if one is readily available.
3. Headlights/daytime running lights must be on when operating a vehicle.
4. Wear seat belt while operating or riding in motor vehicles equipped with them, unless engaged in inspections and traveling less than 15 MPH (25 KPH) on CPKC property.
5. While being transported in vehicles, ride only in seats permanently installed or in approved, identified riding locations.
6. Do not use hand held cell phones while operating a company vehicle or mobile equipment while it is in motion on any type of road except in an emergency.
7. Use company provided cell phones, hands free only, for limited use while operating a company vehicle or mobile equipment if:
 - It is solely for company business;
 - It is safe to do so; and
 - The vehicle or mobile equipment being operated is NOT on a public roadway in a province, state, or other jurisdiction where such use is in violation of any law or regulation.
8. Do not get on or off a moving vehicle.
9. While transporting tools, materials and equipment with a company vehicle on road or track, loads must be contained, immobilized or secured.
10. Do not park foul of the track, unless track protection is provided and only when necessary.

T-5 Aligning Drawbar / Coupler

1. Separate equipment by a minimum of 50 feet.
2. Ensure that equipment is secured and 3-point protection is provided.
3. Do not adjust coupler by kicking it with your foot.
4. Do not lift a drawbar.

Safe Work Procedure: Aligning Coupler with Backwards or Forward Facing Method

- Step 1:** Ensure three point protection is in place and/or cars are secured with a minimum of 50 feet separation.
- Step 2:** Stand to the side of the coupler.
- Step 3:** Face or turn your back to the coupler leaning against it.
- Step 4:** Put one foot beneath the coupler, one foot in front of you or one foot behind you, depending on the method.
- Step 5:** Watch your footing, especially during wet and/or winter conditions. Do not step on the rail when walking; however, it is permitted to brace your foot on the rail for added leverage when aligning the drawbar using this technique.
- Step 6:** Grip the coupler from beneath and watch your fingers.
- Step 7:** Keep the load close to your body.
- Step 8:** Bend at the knees and hips while maintaining a neutral spine.
- Step 9:** Raise up from the knees, using your leg muscles, and shift your weight forwards or backwards to push the drawbar over. Do not lift the drawbar or elevate your shoulders when pushing.
- Step 10:** Use whole body movements, pushing small distances, stopping and repositioning as needed (repeating the steps above) until the drawbar is aligned. Do not over exert.

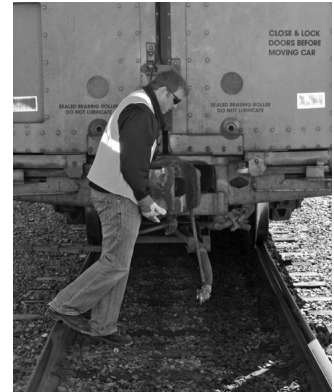

T-6 Coupling / Uncoupling

1. Before coupling cars:
 - If riding equipment prior to coupling, detrain (if riding a locomotive, you are exempt from detrain); and
 - Ensure couplers are aligned and that at least one knuckle is open.
2. Only use an operating lever under the following conditions:
 - while stopped
 - at a walking pace facing the direction of travel, never run; or

- On the locomotive, while riding in the locomotive stairwell
 - Use only your hand to operate the operating lever.
3. If required to adjust the knuckle by hand:
- separate equipment by a minimum of 50 feet;
 - ensure 3-point protection is provided, confirm the slack has adjusted and no movement will occur on the unattached equipment; and
 - with one foot outside of the rail, lift the operating lever with your left hand, grab the middle of the knuckle with your right hand and pull the knuckle open.

T-7 Knuckle Replacement

1. When removing or replacing knuckles, keep feet clear of area directly beneath knuckle.
2. Do not insert your fingers through the hole at the bottom of a coupler to raise the lock block to open the knuckle or any pinch points inside the coupler.

Safe Work Procedure: Replacing Knuckles

- Step 1:** Ensure 3-point protection is in place or cars are secured with a minimum of 50 ft separation.
- Step 2:** Obtain the same knuckle type as removed.
- Step 3:** Keeping feet clear of the area under the coupler, make sure the knuckle pin is in place and open the knuckle.
- Step 4:** Remove the cotter pin and then the knuckle pin.
- Step 5:** Remove the knuckle from the coupler.
- Step 6:** Holding the old knuckle close to the body (with stable base of support) place it away from the immediate work area so it will not become a tripping or operational hazard.
- Step 7:** Drop the replacement knuckle over the rail first before repeating the squat lift.
- Step 8:** Move the lock block back into the coupler recess with the operating lever held up with an operating lever strap or other available item (i.e. stick, belt).
- Step 9:** Use a squat technique, with wide stance, bending through the hips and knees, keeping your back neutral as you lift the knuckle off the ground and place it into the coupler pocket.
- Step 10:** Close the knuckle.
- Step 11:** Insert the knuckle pin into the pinhole and cotter pin, with both hands free, making sure it locks properly.

T-8 Crossing Over or Between Equipment

1. Use only the appropriate safety appliances when crossing over equipment (crossover platforms, ladders, handholds, locomotive platforms) and maintain three points of contact at all times.
Exception: Employees may cross over intermodal



cars not equipped with continuous handholds, provided the walking platform is wide enough to safely cross over.

Before crossing over ensure the car is secured and will not be moved.

2. It is permissible to cross from one car to another car provided all of the following are met;
 - Cars are coupled and stationary
 - Three points of contact are maintained at all times
 - Both cars have appropriate end crossover platforms and grab irons
3. The following is prohibited, do not cross:
 - under equipment.
 - over or between coupled, moving cars; or
 - over or between cars without end platforms (e.g. multi-level autos).
4. Do not step onto the coupler, striker casting, sliding center sill, coupler shank, angle cock, air hose or trainline, journal box, operating lever, or truck side.

T-9 Derails

1. Prior to operating a derail:
 - ensure the track is either clear of traffic in both directions or equipment is secured to prevent uncontrolled movement and;
 - ensure that your movement is stopped 100 feet from an applied manual derail.
2. If a lock is present, lock derails in non-derailing position when switching.
3. Test a flip-type derail (with or without handle) for resistance before attempting to lift.

T-11 Entraining and Detraining Equipment

1. When conditions are determined to be safe, and only after the locomotive engineer confirms the speed of the movement is 4 MPH or less, employees are permitted to entrain or detrain moving equipment.
2. Always verbally communicate the intent to the locomotive engineer (includes RCLS / RCO operator) prior to entraining or detraining moving equipment. The locomotive engineer must verbally acknowledge the intention of entraining or detraining the movement and confirm to the employee when the speed is 4 MPH or less at the entraining or detraining location.
3. Always verbally communicate to the locomotive engineer once you have safely entrained or detrained moving equipment.
4. Never entrain or detrain moving equipment while in possession of a grip/bag or any item that would prevent the full use of both hands (Eg. EOT's, tools, water, switch broom).
5. Entrain and detrain clear of switch stands, bridge approaches, retaining walls, restricted / close clearances, debris and other fixed objects.

6. Ensure your body is facing the stairwell or side ladder on equipment when entraining or detraining.
7. Do not jump from any piece of equipment or structure to ground level or onto another adjacent equipment or structure except in an Emergency situation.
8. Use 3 points of contact on steps, ladders, railings, or handrails when entraining or detraining any piece of equipment or structure, maintaining a firm grip.
9. Never entrain or detrain moving equipment if the car is a flat car not equipped with handholds extending at least 18 inches above the deck of the car.
10. Entrain or Detrain moving equipment on the leading end of equipment.
Exception – It is permissible to Entrain or Detrain the trailing end of a car or locomotive only when it is the last piece of equipment of a movement.
11. Always look both directions and for stable footing when getting on or off equipment.

Safe Work Procedure: Entraining moving equipment

- Step 1:** Communicate the intention to entrain to the locomotive engineer/controlling operator and receive confirmation from the locomotive engineer/controlling operator that the speed is 4 MPH or less prior to entraining moving equipment. Stand facing the approaching movement, clear of its path.
- Step 2:** Ensure that your entraining area:
- Will provide solid footing, and
 - Does not have any object or condition that will cause you to slip or trip.
- Step 3:** Do not attempt to entrain if you think the equipment is moving too fast, reduce speed to a safe level.
- Step 4:** Grasp handrails with both hands and, in sync with the movement, step into the stirrup with the trailing foot (relative to the direction of movement) first and then the other foot.
- Step 5:** Communicate to the locomotive engineer/controlling operator once you have safely entrained.

Safe Work Procedure: Detraining moving equipment

- Step 1:** Communicate your intention to detrain to the locomotive engineer/controlling operator receive confirmation from the locomotive engineer/controlling operator that the speed is 4 MPH or less prior to detraining moving equipment. When getting off equipment, always face the direction of travel. Visually select a safe area to detrain well in advance.
- Step 2:** Ensure that your detraining area:
- Will provide solid footing, and
 - Does not have any object or condition that will cause you to slip or trip.
- Step 3:** When getting off equipment, always face the equipment that you are about to detrain and look where you are going to place your feet.

Step 4: As you get closer:

- Narrow your focus on a detraining spot, checking that it is free of tripping hazards.
- Drop your trailing foot (relative to the direction of movement) from the stirrup.
- Lower your trailing foot to the ground, lining your toes in the direction of movement and step away with the leading foot releasing your lead hand.

Step 5: Maintain a grip on the handhold with your trailing hand (relative to the direction of movement) until you are balanced on your feet.

Step 6: Once your balance is ensured, release your trailing hand from the handhold and step away from the track.

Step 7: Communicate to the locomotive engineer once you are safely off the equipment.

T-13 Fusees

1. Store fusees in authorized locations, such as approved flagging kits.
2. When igniting a fusee:
 - hold and strike it away from your body;
 - do not look directly at the fusee; and
 - do not ignite near fuel sources and be on guard for sparks.
3. When extinguishing the fusee:
 - Bury the burning end in sand or loose dirt
 - Gently strike the burning end of the fusee over the edge of a rail or a heavy metal object to ensure the burning compound is separated from the rest of the fusee; or
 - Let the fusee burn to completion.
4. After extinguishing a fusee, dispose of it in an appropriate place. Do not allow the burning compound to come in contact with combustible material.

Safe Work Procedure: Fusees

Step 1: Hold the fusee near the base.

Step 2: Pull the tape over the top to expose the scratch surface on the end of the cap.

Step 3: Twist the cap away from the head of the fusee.

Step 4: Hold the cap stationary, turn your face away, and rub the igniter on the head of the fusee lightly against the scratch surface of the cap in a motion away from the body.

Step 5: If the fusee does not light, pause before attempting to light it again. While pausing, keep the fusee pointed away from your face and body.

T-14 Hand Brakes

1. Fully release all hand brakes prior to moving equipment, unless cabling a car or applying GCOR 7.12.
2. When operating wheel-type hand brakes, always grip the brake wheel with your thumb on the outside of the wheel rim and never overexert.
3. Do not apply or release wheel style hand brakes from the ground unless the bottom of the handbrake wheel is at shoulder height or below.
4. When releasing hand brakes check at least two cars beyond the last hand brake found to ensure there are no more hand brakes applied.
5. It is permissible to apply a hand brake for the purpose of controlling free rolling equipment, the handbrake must only be applied with sufficient force not to cause the wheels to slide or lock up.
6. Never use both hands or a foot to operate a hand brake. Exception: Both hands may be used to operate a staff-type brake and a foot may be used to operate the pawl.
7. Where authorized by SVP Operations, Company approved brake sticks may be used to operate vertical wheel style hand brakes, retainer valves, open knuckles, angle cocks and press the reset button on an EOT on stationary equipment. The use of defective brake sticks is prohibited.



White line indicates where the bottom of the handbrake wheel should be in relation to the shoulder.

When using a brake stick to operate a handbrake:

- If practicable, work from the Field side rather than between adjacent tracks.
 - If working between adjacent tracks keep clear of moving equipment.
 - Crew members must comply with the requirements of T-27 3-point protection.
 - Place the hook to the outside of the wheel to avoid the hook from being caught between the wheel and the equipment.
 - Never place the butt of the brake stick against your body, keep it at the side of your body.
 - Never cross equipment with the brake stick in hand, pass it through equipment
 - Never walk backwards
 - Do not place the brake stick:
 - o on or remove from moving equipment
 - o in a location where it may be an obstruction or tripping hazard
 - Do not use the brake stick to:
 - o Operate defective hand brake wheels
 - o Operate quick release handles
8. Keep your body and hands free of all moving parts eg. chain, wheel, release handle.
 9. Never use hand brake wheel as a handhold.

T-19 On or About Locomotives

1. Use door handles or other opening/closing devices to open /close doors or windows whenever provided.
2. Keep locomotive cab and walkways clean, free of debris, clutter and slip/trip hazards.
3. Ask for assistance when placing grips, bags, MU cables, tools, EOT's etc. on locomotives, if required.
4. When running the units through flange ways that may be obstructed with snow, ice or other material. You should detrain and walk clear of the movement watching for wheel climb until you are beyond the condition.
5. Store tools, EOT's and MU cables in the designated locations.

T-20 On or About Tracks

1. Do not sit or lean against rail equipment.
2. Look in both directions before:
 - Fouling or crossing any track
 - Getting on or off equipment; or
 - Operating a switch.
3. Never walk or stand foul of a track between the rails or on the shoulder tie ends, unless there are no other viable options available and it is safe to do so.
4. When walking between standing equipment, ensure there is a minimum of 50 feet of separation between equipment.
5. Allow at least 15 feet when passing around the end of standing equipment unless proper protection is provided.
6. Maintain a safe distance from moving equipment to avoid protruding objects.
7. Do not step on any part of:
 - a rail;
 - a switch or switch machine/ heater except to operate foot pedal;
 - a frog;
 - a derail;
 - a retarder;
 - a defect detector/hot box detector;
 - Automatic Equipment Identification (AEI) reader; or
 - Wayside interface unit (WIU).
8. At night and during periods of reduced visibility, use a lantern or approved light source to perform work.
 - All T&E employees MUST use a CPKC supplied hand lantern as an approved light source to perform work.
 - It is permissible for all T&E employees to use a headlamp in addition to the CPKC supplied hand held lantern to perform work.

9. Lanterns must always be carried by hand or through your arm and never clipped to your body.

Exception:

- Locomotive engineers may use a hand held flashlight while performing the duties of a locomotive engineer.
10. When traversing a bridge be aware of weather conditions, lighting conditions and bridge surface conditions. Walk between the rails if no walkway is provided.
 11. If found in a situation where you are located between adjacent track movements, kneel down and stop the movement you are controlling.
 12. When working at or near crossings, train crews must avoid using hand signals for train operations, which could be misunderstood by motorists using the crossing.
 13. Before going between or working on the end of rail equipment that does not have a locomotive coupled to it:
 - a crew member, must verbally inform other crew members, and other crews working in close proximity by radio and receive acknowledgment from those notified.
 - must not be coupled to and/or handbrakes released that could affect the movement of such equipment without permission from the crew member that is between or at the end of rail equipment.
 14. When duties require you to cross a track, walk directly across the track at a right angle (90-degrees). Employees must look both ways prior to each track and apply a 90-Degree principle when conditions permit.

Best Practice:

When walking ahead of a movement, ensure you check the position of the movement often and never foul the track.

T-21 Personal Protective Equipment

1. Use, wear and maintain personal protective equipment and clothing obtained from approved sources required by job task and/or work environment (including off-site industries) as per standard, including the following requirements:
Note: All PPE below must be readily available when participating in classroom training

Safety eyewear must:

- meet CSA Z94.3 (in Canada) and ANSI Z87.1 (in the US and Mexico);
- have permanently attached side shields;
- not contain transition lenses; and
- not have mirrored finishes

Safety Footwear used must follow procedure outlined H&S 5350:

- meet CSA Z195 (in Canada) and ASTM F13 (in the US and Mexico);
- have puncture resistant soles (in Canada);
- have an 8 inches upper as defined by the manufacturer;
- have a minimum 3/8 inch defined heel;
- be laced fully to the top,
- be maintained free of tears and have functioning tread, and
- be anti-slip when existing snow and/or ice conditions warrant
- be worn at all times while on duty including deadheading (in taxi)

High Visibility apparel must:

- meet CSA Z96 Class 2 Level 2 (in Canada)
- meet CSA Z96 Class 2 Level 2 or ANSI/ISEA - 107 Class 2 (in the US and Mexico)
- be visible at all times;
- be worn zippered or snapped up at all times; and
- be lime green/yellow in color when worn by new hires throughout their first year of service.

Protective gloves must:

- Be worn where potential to chemical or physical injury to the hands exists (including operating switches, derails, tasks involving cars or locomotive).

See PPE and Clothing Chart

2. Confirm that personal protective equipment is in working condition and not modified before use, removing from service if defective.
3. Wear ankle-length pants and waist-length shirts with minimum quarter-length sleeves at all times.
4. Clothing must not interfere with vision, hearing or use of hands and feet. It must fit appropriately and/or be secured to prevent catching in machinery or on equipment.
5. Long hair must be tied back or secured.
6. Jewelry must not be worn around sources of entanglement or electrical equipment.

T-22 Personal Protective Equipment Chart

The following chart indicates minimum PPE requirements for Train & Engine employees while conducting.

Transportation/Field Operations PPE Requirements M = Mandatory R = As Required - = Not Required	Hearing Protection	Gloves/ Mitts	High Visibility Vest	Hard Hat	Respiratory Protection	Eye Protection	Safety Footwear
Crews of work trains	R	M	M	R	R	M	M
Customer Property	R	M	M	R	R	M	M
Handling switches critical parts on cars, engines, EOT/SBU devices	R	M	M	-	-	M	M
In locomotives - closed windows	R	-	-	-	-	-	M
In locomotives - open windows	M	-	-	-	-	M	M
Intermodal Facilities	R	M	M	R	-	M	M
Riding on locomotives outside of cab	M	M	M	-	-	M	M
Riding on rail cars	-	M	M	-	-	M	M
Train inspections	R	R	M	R	-	M	M
Working auxiliaries/ derailments	R	M	M	M	R	M	M
Working in close proximity to retarders	R	-	M	-	-	M	M

Note: Local management may designate other areas or jobs that require additional PPE. All PPE must meet CPKC approved standards.

T-23 Restricted / Close Clearances

1. Review the applicable operating bulletins/notices, timetables (special instructions) and job aids for close/restricted clearances during job briefings and follow-up job briefings.
2. When riding on equipment, detrain before reaching a restricted/close clearance.
3. Extreme caution must be used if switching movements are required within a restricted/close clearance area. These movements should be no more than a car length in distance and the crew member must place themselves in a position that allows the maximum margin of safety.
4. If unable to identify the clearance point when leaving equipment in a track, stand outside the rail of the adjacent track and extend the arm towards the equipment. When you are unable to touch the equipment, leave the equipment at least an additional 50 feet into the track to ensure equipment is beyond the clearance point.


T-24 Riding Equipment

1. Use the side ladder of the lead end of equipment on the engineers side whenever possible and always observe the direction of travel. Whenever possible ride on the engineers side.
2. It is permissible to ride the platform of a locomotive, or other equipment with a designated riding platform (e.g. passenger cars).
3. It is permissible to ride the platform of the leading end of a tank car with the employees feet outside of the rail and body positioned outside of the handrail.
4. It is permissible to ride the end platform of a car only on the trailing end of a movement.
5. It is prohibited to move from one car to another car while moving. (unless equipment is designed for movement between cars i.e. locomotives, passenger cars, rail grinding train, etc.)
6. Always maintain at least 3 points of contact using foot, crook of arm or hands. When riding equipment, use only designated handholds and ensure your feet are facing the stirrup, ladder or stairwell, prepared for slack action.
7. The following is prohibited, do not ride:
 - the lead end platform or front ladder of equipment except as noted in #3 above or when operating a handbrake on cars rolling under their own momentum;
 - on the deck of a flat car, bulkhead or centerbeam;
 - a flat car not equipped with handholds extending at least 18 inches above the deck of the car;
 - middle ladder on a tank car;
 - on any equipment while entering, inside, or leaving any building or structure;
 - on the roof of any rolling stock or on the lading of any car;
 - inside the end cage of equipment;
 - inside a gondola; or
 - between cars unless operating a handbrake on cars rolling under their own momentum.
8. It is prohibited to ride the bottom step of equipment over public crossings at grade.
9. When conditions permit ride on the opposite side of an adjacent track where equipment is present.
10. Ride the side ladder of equipment, only if hand holds and stirrup configuration allow for a firm grip and an erect and normal body position. Never lean your upper body back from the side ladder unless it is safe to do so. Ensure there are no switch stands, equipment in adjacent tracks, or other clearance issues.
11. Always advise the locomotive engineer or controlling operator that you are riding equipment.



T-26 Switches

1. Keep your body, hands, and feet clear of all moving parts and out of the path of the switch handle.
2. Do not apply force with your foot on a switch/derail handle.
3. Prior to operating switches, check the switch rods and switch points for ice, ballast, or any other debris that may prevent the switch from lining freely. Check if the switch has been spiked.
4. Remove the switch point lock pedal, where equipped, before operating switch.
5. Ensure switch points fit properly prior to allowing a movement to pass.
6. Reapply the switch lock or keeper after the switch has been lined.
7. Never use excessive force while operating a switch.
8. Use both hands while operating the switch handle to align the switch points or derail.

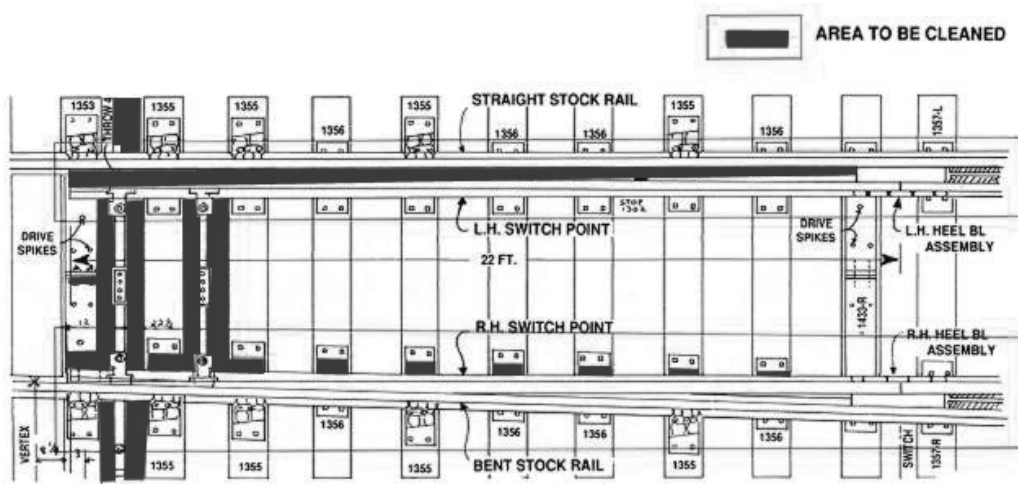


Safe Work Procedure: Cleaning Switches - Winter Months

- Step 1:** Using switch broom, clean area between the switch points and the heel blocks.
- Step 2:** When cleaning the switch points, ensure that they are free of ice and hard-packed snow. (The switch points glide on the switch plates.)
- Step 3:** Start with a wide stance to create a stable base of support. Position your feet so your hips and shoulders face the work to minimize twisting and side bending. Bend at the hips and knees, with your back in neutral while you sweep the brush across your body. Use short strokes and move your feet to avoid twisting or overreaching.
- Step 4:** To pick at any ice, use the scraper tool on the opposite end of the handle and bend deeper through the hips and knees to get close to the work (without bending through the back).
- Step 5:** Clean connecting rods.
- Step 6:** Ensure switch points are thoroughly and properly cleaned and there is no gap between the switch point and stock rail.

T-27 3-Point Protection

1. Provide 3-point protection if cars are connected to locomotives and working on the ground when:
 - one or both feet enter between the rail, between equipment or within 15 feet of the end of the equipment; or
 - breaking the plane of the rail with your torso, between equipment or within 15 feet of the end of equipment.
2. When applying 3-point protection the automatic brake is not required if the engineer ascertains that the locomotive brake(s) are sufficient to hold the equipment. The employee requesting the 3-point protection can still request that the automatic brake be applied if needed to prevent unintended movement.
3. Any other department i.e. mechanical, engineering etc., that requests 3-point protection must have the automatic brake applied if applicable.
4. When more than one employee requests 3-point protection, ensure that each employee cancels the requested protection before removing.

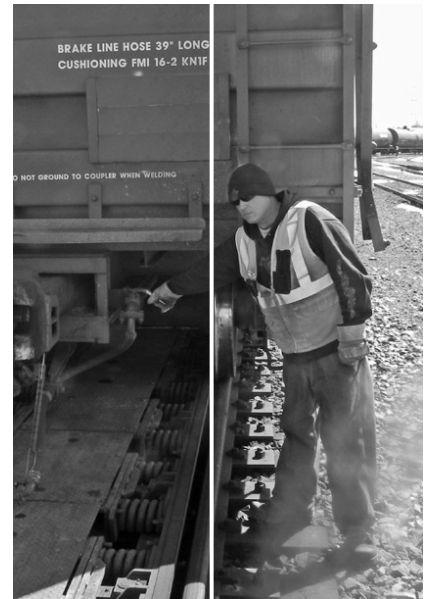

White line indicates the plane of the rail.

Safe Work Procedure: Applying 3-Point Protection

Once a request for 3-point protection is received:

- Step 1:** Apply engine brakes and automatic brake (if required)
- Step 2:** Center the reverser
- Step 3:** Open the generator field switch
- Step 4:** Communicate to your crew member that 3- point protection has been applied.

Safe Work Procedure: Releasing 3-Point Protection

Once confirmation is received that 3-point protection is to be removed:

- Step 1:** Close the generator field switch
- Step 2:** Move the reverser to forward or reverse
- Step 3:** Release the brakes
- Step 4:** Communicate to your crew member that 3-point protection has been released.

Safe Work Procedure: Applying 3-Point Protection in Remote Control Locomotive Service (RCLS / RCO)

Once a request for 3-point is received or 3-point is required:

Step 1: Ensure the speed selector is in "STOP"

Step 2: Ensure the reverser is in "NEUTRAL"

Step 3: Communicate to your crew member that 3-point protection has been applied.

NOTE: If an automatic brake is requested by a crew member or required by any other department i.e. Mechanical, Engineering etc., then at least a FULL application must be made.

T-28 Avoiding Slips, Trips or Falls

To avoid slips, trips or falls, employees must:

- Remain alert and mindful of your surroundings at all times;
- Use designated walkways, crosswalks, handholds and railings when available;
- Plan and choose routes that afford the safest walking conditions;
- Keep a clear view of where you are walking;
- Avoid carrying objects that block your view;
- Keep locomotive cab, vehicle and other equipment floors clear of obstructions and tripping hazards;
- For balance, keep hands out of pockets while walking.
- When transporting an end of train (EOT) device, the device hoses must be secured.

[illegible]

Notes:

[illegible]



CPKC

T&E Critical Safety Rules:

- 1) Shove Protection
- 2) Securing Equipment
- 3) Equipment in the Clear
- 4) Fouling Tracks
- 5) 3-Point Protection
- 6) Authority Violations