



HACKING¹ BADGE VER.3 – PRODUCTION SCHEMATIC


USB-C / POWER

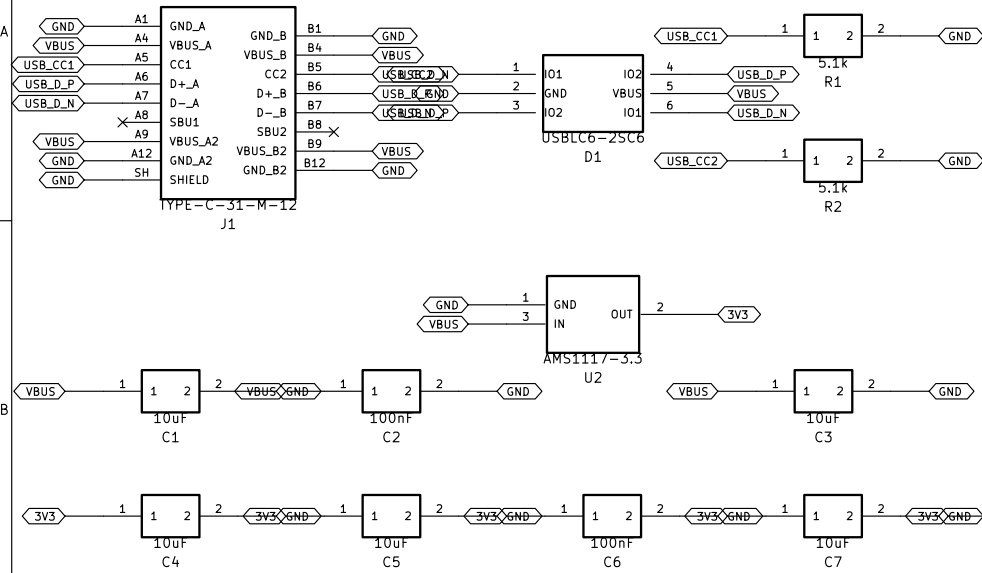


ESP32-S3 CONTROLLER

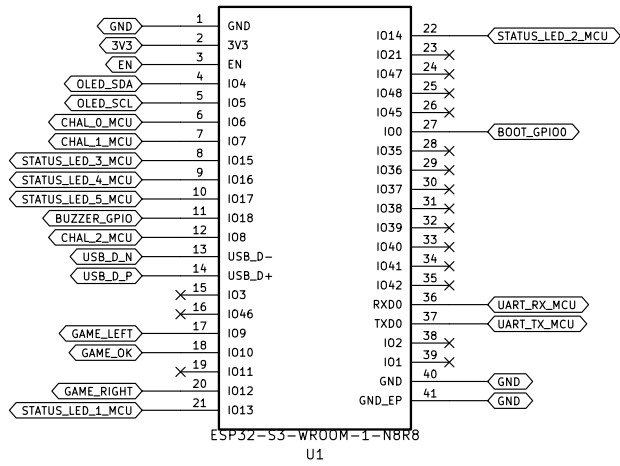


OLED DISPLAY

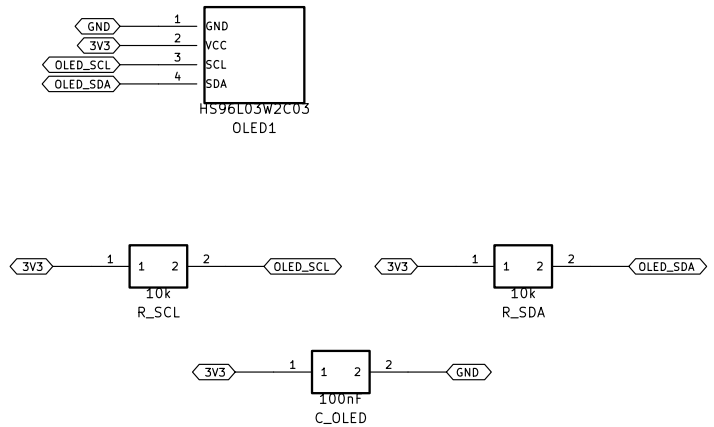


STATUS LEDS

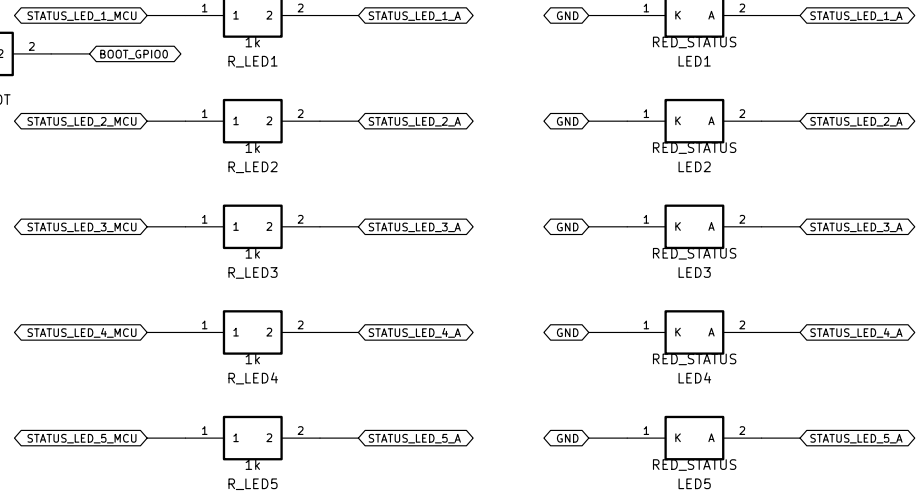


PLAYER CONTROLS




PLAYER UART

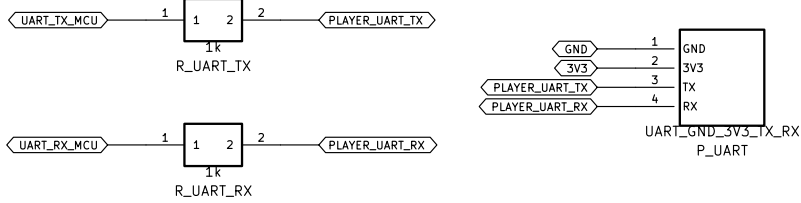


CHALLENGE GPIO PADS

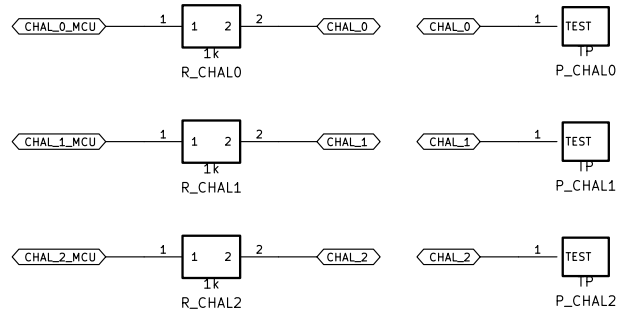

REAR STAFF DEBUG PADS

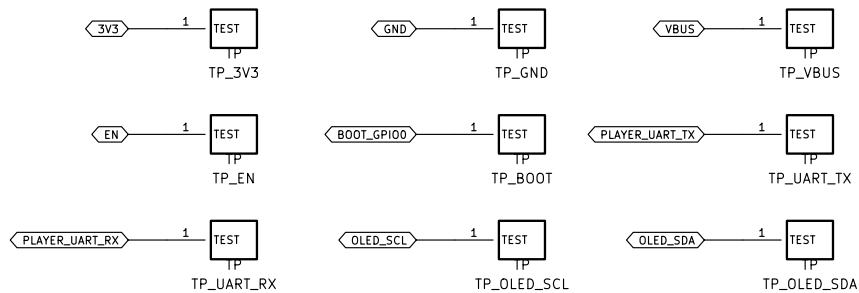

BUZZER DRIVER

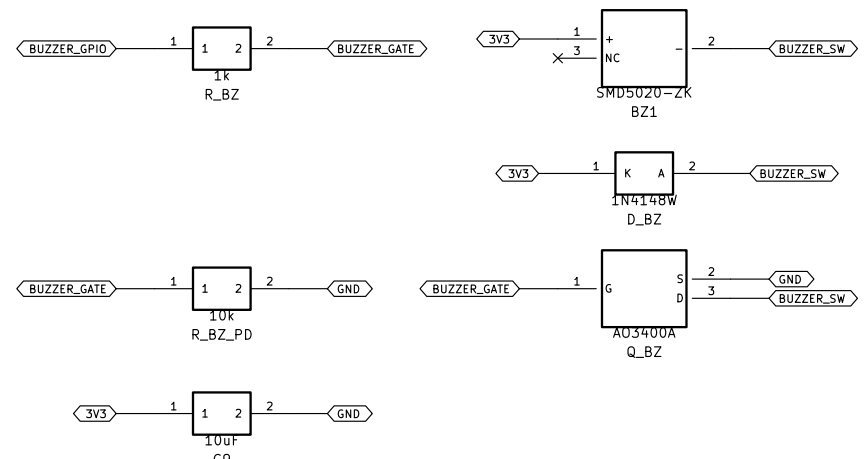

All exposed participant logic is 3.3 V. C0/C1/C2 are protected challenge GPIO pads.

ESP32-S3, USB-C, OLED, LEDs, controls, UART and buzzer Reverse-captured from the routed production PCB		
DKU Aegis x MSG CTF		
Sheet: /		
File: hacking_box_v2.kicad_sch		
Title: Hacking Badge Ver.3 Production Circuit		
Size: A3	Date: 2026-07-28	Rev: 3.1
KiCad E.D.A. 10.0.5		Id: 1/1