IMPORTANT → ALWAYS <u>UNINSTALL</u> ANY OLDER VERSIONS OF THE SCT PORT.MSI PROGRAM BEFORE DOING THIS UPDATE.

ALWAYS USE THE LATEST VERSION OF THE SCT UPDATE PROGRAM


- 1. Hold pressing # key and orange/blue top key, at the same time power on the radio, screen display
- "WARNING This is Boot Mode for Sct!!!"
- 2. Use the USB cable to connect radio and your PC




3. Run the SetupSCT_PORT.msi


and install.

4. Run SCT_PORT.exe

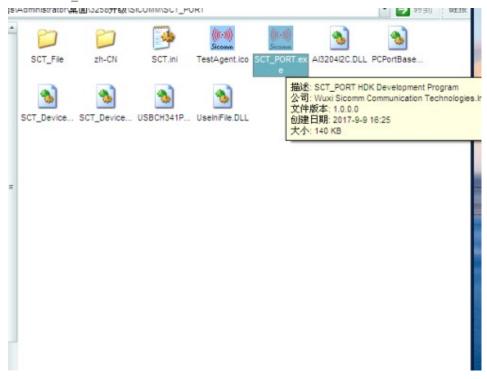


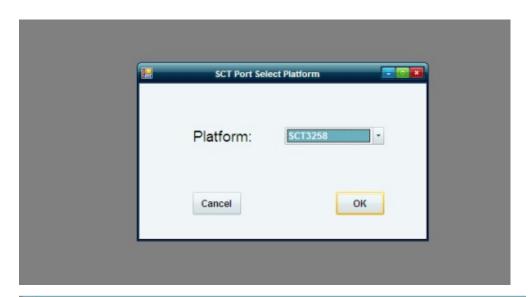




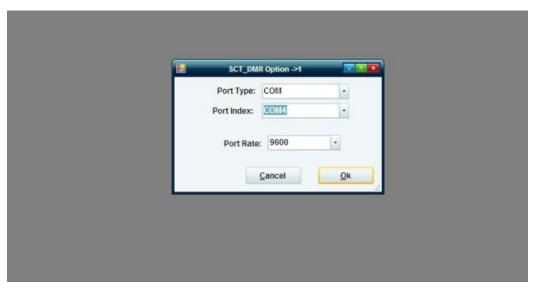


Choose the correct com port

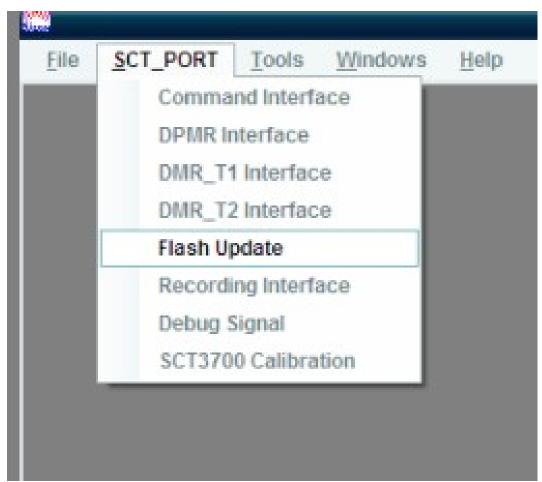


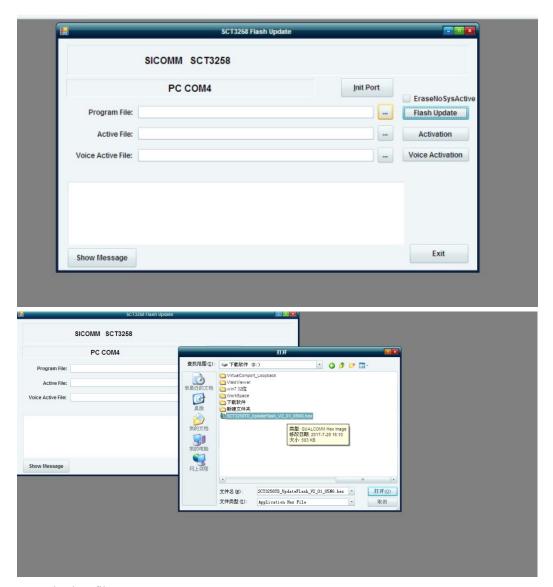

Open the .hex file

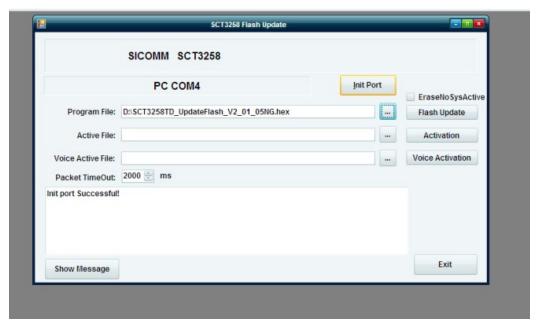

Click on "Init Port" to check the comport connection is correct

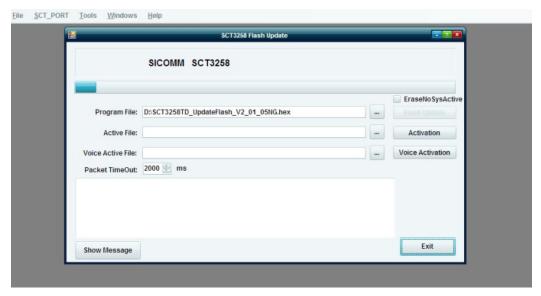

Click on "Flash Update" to start the SCT update

Program File:	D:\SCT3258TD_UpdateFlash_V2_01_05NG.hex
Active File:	
Active File:	
Voice Active File:	
Packet TimeOut:	2000 🖨 ms
DownLoad UserFlas DownLoad Vocoder	
DownLoad Vocoder	
DownLoad Vocoder	
DOWNESCH THESIT CO.	mprotod.

The update is done.