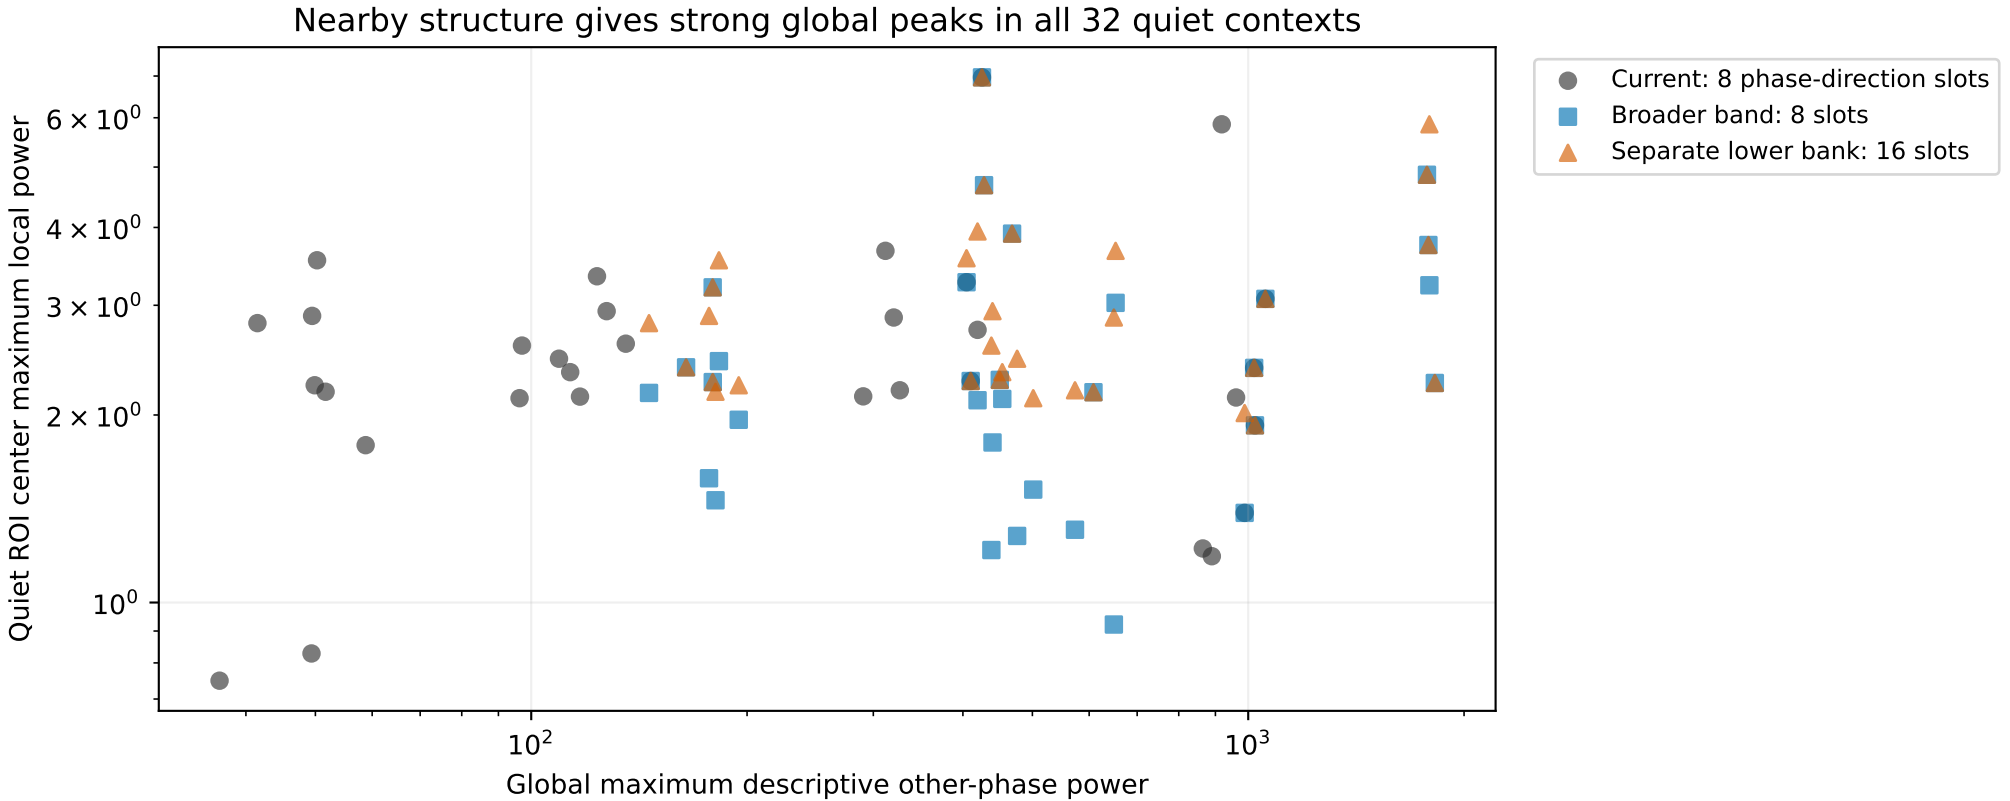

65-packed-pixel local windows fit inside each fixed 160 × 160 quiet ROI.
Both phase directions and overlapping statistics are reused; no power threshold is calibrated.