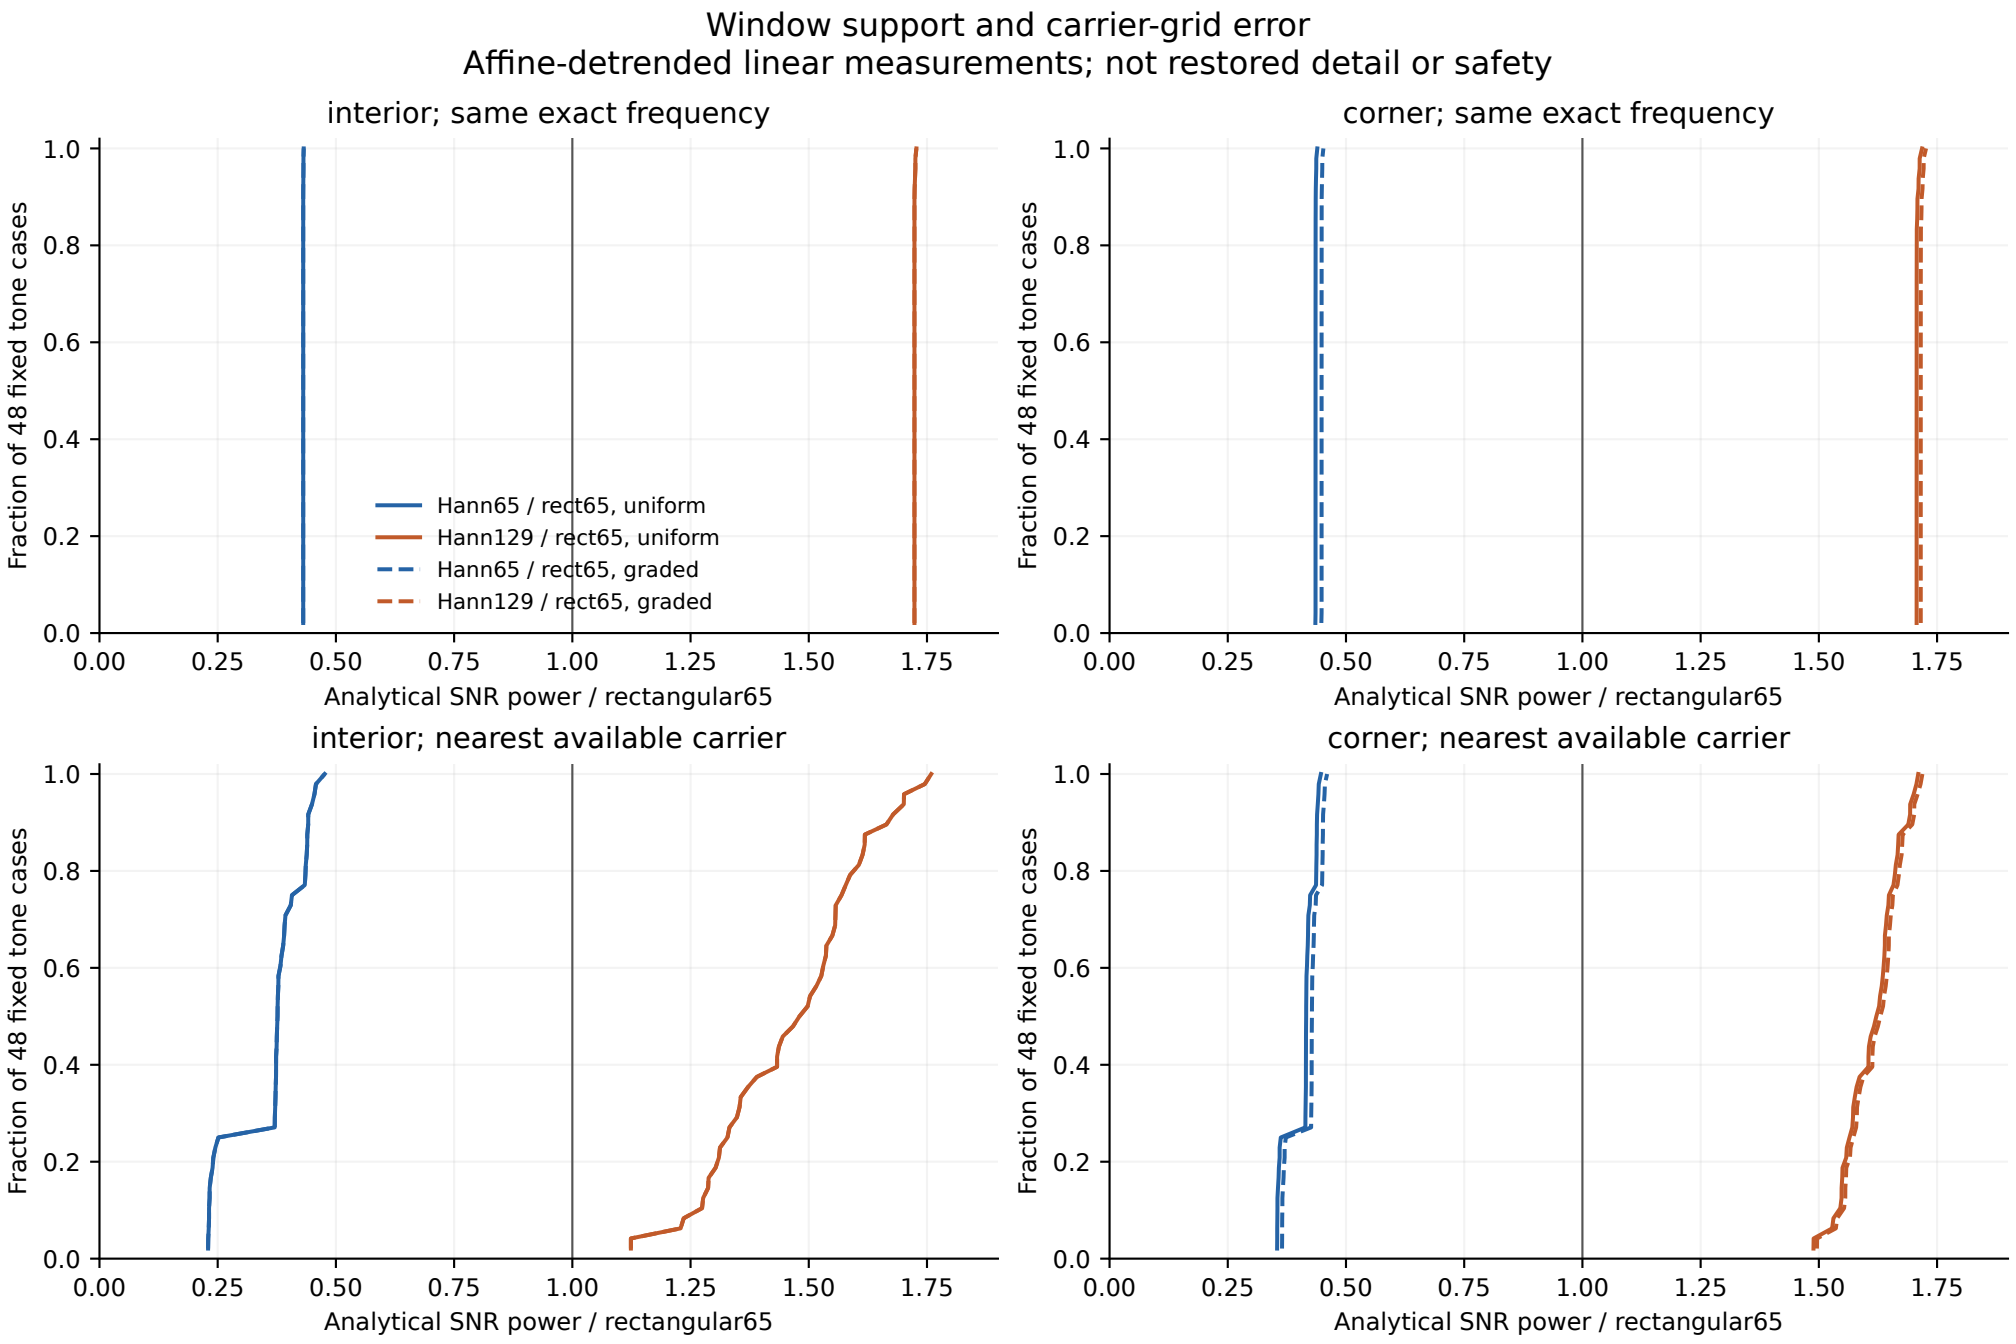
Window support and carrier-grid error
Affine-detrended linear measurements; not restored detail or safety
interior; same exact frequency
corner; same exact frequency
interior; nearest available carrier
corner; nearest available carrier
Fraction of 48 fixed tone cases
Analytical SNR power / rectangular65
Hann65 / rect65, uniform
Hann129 / rect65, uniform
Hann65 / rect65, graded
Hann129 / rect65, graded
0.0
0.2
0.4
0.6
0.8
1.0
0.00
0.25
0.50
0.75
1.00
1.25
1.50
1.75