

{zx-calculus}

ZX-calculus with TikZ

Léo Colisson Version 2022/02/09

github.com/leo-colisson/zx-calculus

Contents

1	Introduction	1
2	Installation	2
3	Quickstart	2
4	Usage	5
4.1	Add a diagram	5
4.2	Nodes	6
4.3	Phase in label style	12
4.4	Wires	14
4.4.1	Creating wires and debug mode	14
4.4.2	Wire styles (new generation)	17
4.4.3	IO wires, the old styles	27
4.5	Externalize	33
5	Advanced styling	34
5.1	Overlaying or creating styles	34
5.2	Wire customization	38
5.3	Wires starting inside or on the boundary of the node	39
5.4	Nested diagrams	51
5.5	Further customization	53
6	Future works	54
7	Acknowledgement	54
8	Changelog	54
	Index	55


1 Introduction

This library (based on the great `TikZ` and `TikZ-cd` packages) allows you to typeset ZX-calculus directly in \LaTeX . It comes with a default—but highly customizable—style:



```
\begin{ZX}
  \zxZ{\alpha} \arrow[r] & \zxFracX-{\pi}{4}
\end{ZX}
```

Even if this has not yet been tested a lot, you can also use a “phase in label” style, without really changing the code:



```
\begin{ZX}[phase in label right]
  \zxZ{\alpha} \arrow[d] \\\
  \zxFracX-{\pi}{4}
\end{ZX}
```

The goal is to provide an alternative to the great `tikzit` package: we wanted a solution that does not require the creation of an additional file, the use of an external software, and which automatically adapts the width of columns and rows depending on the content of the nodes (in `tikzit` one needs to manually tune the position of each node, especially when dealing with large nodes). Our library also provides a default style and tries to separate the content from the style: that way it should be easy to globally change the styling of a given project without redesigning all diagrams. However, it should be fairly easy to combine `tikzit` and this library: when some diagrams are easier to design in `tikzit`, then it should be possible to directly load the style of this library inside `tikzit`.

This library is quite young, so feel free to propose improvements or report issues on github.com/leo-colisson/zx-calculus/issues. We will of course try to maintain backward compatibility as much as possible, but we can't guarantee at 100% that small changes (spacing, wire looks...) won't be made later. In case you want a completely unalterable style, just copy the two files of this library in your project forever (see installation)!

2 Installation

If your CTAN distribution is recent enough, you can directly insert in your file:

```
\usepackage{zx-calculus}
```

or load `TikZ` and then use:

```
\usetikzlibrary{zx-calculus}
```

If this library is not yet packaged into CTAN (which is very likely in 2021), you must first download `tikzlibraryzx-calculus.code.tex`¹ and `zx-calculus.sty`² (right-click on “Raw” and “Save link as”) and save them at the root of your project.


3 Quickstart

You can create a diagram either with `\zx[options]{matrix}`, `\zxAmp[options]{matrix}` or with:

```
\begin{ZX}[options]
  matrix
\end{ZX}
```

The matrix is composed of rows separated by `\\` and columns separated by `&` (except in `\zxAmp` where columns are separated with `\&`).

This matrix is basically a `TikZ` matrix of nodes (even better, a `tikz-cd` matrix, so you can use all the machinery of `tikz-cd`), so cells can be created using `!tikz style! content`. However, the users does not usually need to use this syntax since many nodes like `\zxZ{spider phase}` have been created for them (including `\zxN{}` which is an empty node):



```
\begin{ZX}
  \zxZ{} & \zxZ{\alpha} & \zxZ{-\alpha} & \zxZ{\alpha+\beta} & \zxFracZ{\pi}{2} & \zxFracZ{-\pi}{2} \\
  \zxX{} & \zxX{\alpha} & \zxX{-\alpha} & \zxX{\alpha+\beta} & \zxFracX{\pi}{2} & \zxFracX{-\pi}{2} \\
  \zxN{} & \zxH{}
\end{ZX}
```

Note that if a node has no argument like `\zxN`, you should still end it like `\zxN{}` to make sure you code will be backward compatible and will behave correctly.

¹<https://github.com/leo-colisson/zx-calculus/blob/main/tikzlibraryzx-calculus.code.tex>

²<https://github.com/leo-colisson/zx-calculus/blob/main/zx-calculus.sty>

To link the nodes, you should use `\arrow[options]` (`\ar[options]` for short) at the end of a cell (you can put many arrows). The options can contain a direction, made of a string of `r` (for “right”), `l` (for “left”), `d` (for “down”), `u` (for “up”) letters. That way, `\ar[rrd]` would be an arrow going right, right, and down:



```
\begin{ZX}
\zxZ{} \ar[rrd] & \zxX{} \\
& & \zxX-{\alpha}
\end{ZX}
```


See how the alignment of your matrix helps reading it: in emacs M-x `align` is your friend (or even better, if you are tired of selecting the lines to align, bind this `align-environment` function³ to some shortcuts, like `C-<tab>` and you will just have to do a single key-press to align your matrix).

You may also encounter some shortcuts, like `\rar` instead of `\ar[r]`. Since straight lines are boring, we created many styles that you can just add in the options. For instance, a measured Bell-pair can be created using the `C` style (note also how the `*` argument forces the node to be tighter):




```
\begin{ZX}
\zxZ*{a \pi} \ar[d,C] \\
\zxZ*{b \pi}
\end{ZX}
```

The name of the style usually tries to graphically represent the shape of a node (here it looks like a `C`). We also introduce many other styles, like `N` for wires that arrive and leave at wide angle (yeah, the `N` is the best letter I could find to fit that shape):



```
\begin{ZX}
\zxN{} & \zxZ{\beta} \\
\zxZ{\alpha} \ar[ru,N] \ar[rd,N] & \\
& \zxZ{\gamma}
\end{ZX}
```

Or `s` for wires that arrive and leave at sharp angles (the `\zxN{}` is used because it seems that the first cell of a matrix can’t be empty):



```
\begin{ZX}
\zxN{} & \zxZ{\beta} \\
\zxZ{\alpha} \ar[ru,s] \ar[rd,s] & \\
& \zxZ{\gamma}
\end{ZX}
```

You have then different variations of a style depending on the shape and/or direction of it. For instance, if we want the arrival of the `N` wire to be flat, use `N-`:



```
\begin{ZX}
\zxZ{\alpha} \ar[rd,N-] & \zxZ{\beta}
\end{ZX}
```

Similarly `o'` is a style for wires that have the shape of the top part of the circle, and comes with variations depending on the part of the circle that must be kept:



```
\begin{ZX}
\zxZ{\alpha} \ar[r,o',green] \ar[r,o-,red] \ar[d,o-,blue] \ar[d,-o,purple] & \zxZ{\beta} \\
\zxZ{\beta}
\end{ZX}
```


³<https://tex.stackexchange.com/a/64566/116348>

Note that the position of the embellishments (', -, ...) tries to graphically represent the shape of the node. That way -o means “take the left part (position of -) of the circle o”. Applied to C, this gives:




```
\begin{ZX}
\zxX{} \ar[d,C] \ar[r,C'] & \zxZ{} \ar[d,C-]\
\zxZ{} \ar[r,C.] & \zxX{}
\end{ZX}
```

You also have styles which automatically add another node in between, for instance H adds a Hadamard node in the middle of the node:



```
\begin{ZX}
\zxZ{\alpha} \ar[r,o',H] \ar[r,o-,H] & [\zxHCol] \zxZ{\beta}
\end{ZX}
```

Note that we used also &[\zxHCol] instead of & (on the first line). This is useful to add an extra space between the columns to have a nicer look. The same apply for rows (see the *Row instead of *Col):



```
\begin{ZX}
\zxZ{\alpha} \ar[d,-o,Z] \ar[d,o-,X] \ll[\zxSRow]
\zxX{\beta}
\end{ZX}
```

The reason for this is that it is hard to always get exactly the good spacing by default (for instance here TikZ has no idea that a H node will be inserted when it starts to build the diagram), and sometimes the spacing needs some adjustments. However, while you could manually tweak this space using something like &[1mm] (it adds 1mm to the column space), it is better to use some pre-configured spaced that can be (re)-configured document-wise to keep a uniform spacing. You could define your own spacing, but we already provide a list for the most important spacings. They all start with zx, then you find the type of space: H for Hadamard, S for spiders, W when you connect only \zxNone nodes (otherwise the diagram will be too shrinked), w when one side of the row contains only \zxNone... and then you find Col (for columns spacing) or Row (for rows spacing). For instance we can use the \zxNone style (\zxN for short) style and the above spacing to obtain this:



```
\begin{ZX}
\zxN{} \rar & [\zxwCol] \zxH{} \rar & [\zxwCol] \zxN{}
\end{ZX}
```

or that:



```
\begin{ZX}
\zxN{} \ar[d,C] \ar[dr,s] & [\zxWCol] \zxN{} \ll[\zxWRow]
\zxN{} \ar[ru,s] & \zxN{}
\end{ZX}
```

When writing equations, you may also want to change the baseline to align properly your diagrams on a given line like that (a=blabla gives the alias name blabla to the node, and configure tools useful for debugging):




```


$$\begin{aligned}
& \text{\$}\text{\zx[math baseline=myZ]} \{ \\
& \quad \text{\zxX}\{\} \ll \\
& \quad \text{\zxZ[a=myZ]}\{\} \\
& \quad \} \\
& = \text{\zx}\{\text{\zxX}\{\} \ \& \ \text{\zxZ}\{\}\}\text{\$}
\end{aligned}$$


```

We also provide easy methods like phase in label right to change the labelling of a note (per-node, per-picture or document wise) to move the phase in a label automatically:





```
\begin{ZX}[phase in label right]
\zxZ{\alpha} \arrow[d] \ll
\zxFracX-{\pi}{4}
\end{ZX}
```


Now you should know enough to start your first diagrams. The rest of the documentation will go through all the styles, customizations and features, including the one needed to obtain:



```
\begin{ZX}
\leftManyDots{n} \zxX{\alpha} \zxLoopAboveDots{} \middleManyDots{} \ar[r,o'={a=75}]
& \zxX{\beta} \zxLoopAboveDots{} \rightManyDots{m}
\end{ZX}
```

You will also see some tricks (notably based on alias) to create clear bigger diagrams, like this debug mode which turns  into  (of course it only helps during the construction).

You will also see how you can customize the styles, and how you can easily extend this library to get any custom diagram:



```
{ % \usetikzlibrary{shadows}
\tikzset{
  my bloc/.style={
    anchor=center,
    inner sep=2pt,
    inner xsep=.7em,
    minimum height=3em,
    draw,
    thick,
    fill=blue!10!white,
    double copy shadow={opacity=.5},tape,
  }
}
\zx{[my bloc] f \rar &[1mm] [my bloc] g \rar &[1mm] \zxZ{\alpha} \rar & \zxNone{}}
}
```

If you have some questions, suggestions, or bugs, please report them on <https://github.com/leo-colisson/zx-calculus/issues>.

Tips: if you are unsure of the definition of a style in an example, just click on it, a link will point to its definition. Also, if your pdf viewer does not copy/paste these examples correctly, you can copy them from the source code of this documentation available here⁴ (to find the example, just use the “search” function of your web browser).

4 Usage

4.1 Add a diagram

```
\zx[options]{your diagram}
\begin{ZX}[options]
environment contents
\end{ZX}
\zxAmp[options]{your diagram}
```

You can create a new ZX-diagram either with a macro (quicker for inline diagrams) or with an environment. All these commands are mostly equivalent, except that in `\zxAmp` columns are separated with `\&` instead of `&` (this was useful before as `&` was not usable in `align` or inside macros. Not it should be fixed.). The `options` can be used to locally change the style of the diagram, using the same options as the `{tikz-cd}` environment (from the `tikz-cd` package⁵). The `your diagram` argument, or the content of `{ZX}` environment is a TikZ matrix of nodes, exactly like in the `tikz-cd` package: rows are separated using `\\`, columns using `&` (except for `\zxAmp` where columns are separated using `\&`), and nodes are created using

⁴<https://github.com/leo-colisson/zx-calculus/blob/main/doc/zx-calculus.tex>

⁵<https://www.ctan.org/pkg/tikz-cd>

| `[tikz style]` | `node content` or with shortcut commands presented later in this document (recommended). Wires can be added like in `tikz-cd` (see more below) using `\arrow` or `\ar`: we provide later recommended styles to quickly create different kinds of wires which can change with the configured style. Content is typeset in math mode by default, and diagrams can be included in any equation.

Spider α , equation $\circ = \circ$ and custom diagram:



```
Spider \zx{\zxZ{\alpha}}, equation $\zx{\zxZ{}} = \zx{\zxX{}}$ %
and custom diagram: %
\begin{ZX}[red]
  \zxZ{\beta} \arrow[r] & \zxZ{\alpha} \\
  | [fill=pink,draw] | \gamma \arrow[ru,bend right]
\end{ZX}
```

`/tikz/defaultEnv/amp`

(style, no value)

In a previous version (before 2022/02/09), it was not possible to use `&` inside macros and `align` due to \LaTeX limitations. However, we found a solution by re-scanning the tokens, so now no special care should be taken in align or macros. But in case you need to deal with an environment having troubles with `&`, either use the `ampersand replacement=\&` option (whose shortcut is `amp`) or `\zxAmp` (in any case, replace `&` with `\&`).

An aligned equation:

$$\circ - \circ = \circ - \circ \quad (1)$$

This limitation does not apply anymore:

$$\circ - \circ = \circ - \circ \quad (2)$$

even in macros: $\circ - \circ$

```
An aligned equation:
\begin{align}
  \zxAmp{\zxZ{}} \arrow[r] \& \zxX{} \&= \begin{ZX}[amp] \zxX{} \arrow[r] \& \zxZ{} \end{ZX}
\end{align}
This limitation does not apply anymore:
\begin{align}
  \zx{\zxZ{}} \arrow[r] \& \zxX{} \&= \begin{ZX} \zxX{} \arrow[r] \& \zxZ{} \end{ZX}
\end{align}
even in macros: {\setlength{\fboxsep}{0pt} \fbox{\zx{\zxZ{}} \rar \& \zxX{}}}
```

4.2 Nodes

The following commands are useful to create different kinds of nodes. Always add empty arguments like `\example{}` if none are already present, otherwise if you type `\example` we don't guarantee backward compatibility.

`\zxEmptyDiagram`

Create an empty diagram.



```
\begin{ZX}
  \zxEmptyDiagram{}
\end{ZX}
```

`\zxNone+-{\langle text \rangle}`

`\zxN+-{\langle text \rangle}`

`\zxNL`
`\zxNR`

Adds an empty node with `\zxNone{}` (alias `\zxN{}`). The `-|+` decorations are used to add a bit of horizontal (`\zxNone-{}|`), vertical (`\zxNone|{}|`) and both (`\zxNone+{}|`) spacing (I don't know how to add `|` in the documentation of the function).



`\zxNone` is just a coordinate (and therefore can't have any text inside, but when possible this node should be preferred over the other versions since it has really zero width), but `\zxNone-{}|` and `\zxNone|{}|` are actually nodes with `inner sep=0` along one direction. For that reason, they still have a tiny height or width (impossible to remove as far as I know). If you don't want to get holes when connecting multiple wires to them, it is therefore necessary to use `\zxNone{}` or the `wire centered` style (alias `wc`) (if you are using the `IO` mode, see also the `between none` style). But anyway you should mostly use `\zxNone`.

Moreover, you should also add column and row spacing `&[\zxWCol]` and `\\[\zxWRow]` to avoid too shrunk diagrams when only wires are involved.



```
\begin{ZX}
  \zxNone-{}| \ar[C,d] \ar[rd,s] &[\zxWCol] \zxNone{}\\[\zxWRow]
  \zxNone-{}| \ar[ru,s] & \zxNone{}
\end{ZX}
```

Use `&[\zxwCol]` (on the first line) and/or `\\[\zxwRow]` when a single None node is connected to the wire to add appropriate spacing (this spacing can of course be redefined to your preferences):

Compare  with 

```
Compare \begin{ZX}
  \zxN{} \rar & \zxZ{} \rar & \zxN{}
\end{ZX} with \begin{ZX}
  \zxN{} \rar &[\zxwCol] \zxZ{} \rar &[\zxwCol] \zxN{}
\end{ZX}
```


This kind of code is so common that there is an alias for it: `\zxNL` and `\zxNR` automatically add a `\zxN{}` node, configure the column space (for this reason don't add an additional `&`, and be aware that emacs won't align them properly. Note also that the space will only be taken into account if it is on the first line) and add a straight arrow. The L/R part of the name is just to specify if the node is on the right or left of the diagram to put the column and arrow on the right side:



```
\zx{\zxNL \zxX{} \zxNR}
```

Note that these two alias can be used without `{}`. But they are the only ones.

The `\zxN|{text}` and `\zxN-{}|{text}` may be useful to display some texts:



```
\begin{ZX}[content fixed baseline]
  & \zxN|{\dots} \dar
  \zxZ{\theta_i} \rar & \zxZ{} \dar \rar & \zxZ{-\delta_i+\theta_i+r\pi} \rar & \zxH{}
  & \zxN|{\dots}
\end{ZX}
```

When the top left cell is empty, you may get an error at the compilation `Single ampersand used with wrong cat` (this error should be fixed in latest releases) or `<symbol> allowed only in math mode` (not sure why). To solve this issue, you can add an empty node on the very first cell:



```
\begin{ZX}
  \zxN{} &[\zxwCol] \zxN{} \ar[d]\\[\zxwRow]
  \zxNone{} \rar & \zxZ{}
\end{ZX}
```

You may also get the error `Single ampersand used with wrong catcode` when `&` has already a different meaning, for instance in `align`, in that case you may change the `&` character into `\&`

using `[ampersand replacement=\&]`. Note however that in recent versions ($\geq 2022/02/09$) this should not happen anymore.

$$-- = \text{---}\bigcirc\text{---} \quad (3)$$

$$= \text{---}\bigcirc\text{---} \quad (4)$$

```
\begin{align}
\begin{ZX}[ampersand replacement=\&]
\zxN{} \rar \&[\zxWCol] \zxN{}
\end{ZX}
&= \begin{ZX}[ampersand replacement=\&]
\zxN{} \rar \&[\zxWCol] \zxZ{} \rar \&[\zxWCol] \zxN{}
\end{ZX} \\
&= \begin{ZX}[ampersand replacement=\&]
\zxN{} \rar \&[\zxWCol] \zxX{} \rar \&[\zxWCol] \zxN{}
\end{ZX}
\end{align}
```

`\zxNoneDouble+-{<text>}`

Like `\zxNone`, but the spacing for `+-|` is large enough to fake two lines in only one. Not extremely useful (or one needs to play with `start anchor=south,end anchor=north`).

\mathcal{X}

```
\begin{ZX}
\zxNoneDouble|{} \ar[r,s,start anchor=north,end anchor=south] \ar[r,s,start
anchor=south,end anchor=north] \&[\zxWCol] \zxNoneDouble|{}
\end{ZX}
```

`\zxFracZ-{\langle numerator \rangle}[\langle numerator with parens \rangle][\langle denominator with parens \rangle]{\langle denominator \rangle}`

Adds a Z node with a fraction, use the minus decorator to add a small minus in front (a normal minus would be too big, but you can configure the symbol).

$\frac{\pi}{2} \quad \frac{-\pi}{2}$

```
\begin{ZX}
\zxFracZ{\pi}{2} & \zxFracZ-{\pi}{2}
\end{ZX}
```

The optional arguments are useful when the numerator or the denominator need parens when they are written inline (in that case optional arguments must be specified): it will prove useful when using a style that writes the fraction inline, for instance the default style for labels:

Compare $\frac{a+b}{c+d}$ with $\circ (a+b)/(c+d)$

```
Compare
\begin{ZX}
\zxFracZ{a+b}[(a+b)][(c+d)]{c+d}
\end{ZX} with %
\begin{ZX}[phase in label right]
\zxFracZ{a+b}[(a+b)][(c+d)]{c+d}
\end{ZX}
```

`\zxFracX-{\langle numerator \rangle}{\langle denominator \rangle}`


Adds an X node with a fraction.

$\frac{\pi}{2} \quad \frac{-\pi}{2}$

```
\begin{ZX}
\zxFracX{\pi}{2} & \zxFracX-{\pi}{2}
\end{ZX}
```


`\zxZ[⟨other styles⟩]*-⟨text⟩`

Adds a Z node. $\langle other\ styles \rangle$ are optional TikZ arguments (the same as the one provided to `tikz-cd`) They should be use with care, and if possible moved to the style directly to keep a consistent look across the paper.



```
\begin{ZX}
  \zxZ{} & \zxZ{\alpha} & \zxZ{\alpha + \beta} & \zxZ[fill=blue!50!white,text=red]{(a \oplus b)\pi}
\end{ZX}
```

The optional `-` optional argument is to add a minus sign (customizable, see `\zxMinusInShort`) in front of a very short expression and try to keep a circular shape. This is recommended notably for single letter expressions.

Compare $\ominus\alpha$ with $\ominus\alpha$. Labels: $\ominus\alpha$ vs $\ominus\alpha$.

```
Compare \zx{\zxZ{-\alpha}} with \zx{\zxZ{-\alpha}}. Labels:
\zx[pila]{\zxZ{-\alpha}} vs \zx[pila]{\zxZ{-\alpha}}.
```

The `*` optional argument is to force a condensed style, no matter what is the text inside. This can be practical *sometimes*:

Compare $\ominus a\pi$ with $\ominus a\pi$.

```
Compare \zx{\zxN{} \rarr & [\zxwCol] \zxZ{a\pi}} with \zx{\zxN{} \rarr & [\zxwCol] \zxZ*{a\pi}}.
```


but you should use it as rarely as possible (otherwise, change the style directly). See that it does not always give nice results:

Compare $\ominus\alpha \ominus \alpha + \beta$ with $\ominus\alpha \ominus \alpha + \beta$. Labels: $\ominus\alpha \quad \alpha + \beta$ vs $\ominus\alpha \quad \alpha + \beta$.

```
Compare \zx{\zxZ{-\alpha} \rarr & \zxZ{\alpha+\beta}}
with \zx{\zxZ*{-\alpha} \rarr & \zxZ*{\alpha+\beta}}.
Labels:
\zx[pila]{\zxZ{-\alpha} \rarr & \zxZ{\alpha+\beta}}
vs \zx[pila]{\zxZ*{-\alpha} \rarr & \zxZ*{\alpha+\beta}}.
```

`\zxX[⟨other styles⟩]*-⟨text⟩`

Adds an X node, like for the Z node.



```
\begin{ZX}
  \zxX{} & \zxX{\alpha} & \zxX{-\alpha} & \zxX{\alpha + \beta}
  & \zxX[text=green]{(a \oplus b)\pi}
\end{ZX}
```

`\zxH[⟨other styles⟩]`

Adds an Hadamard node. See also H wire style.

```
□ \begin{ZX}
  \zxNone{} \rarr & \zxH{} \rarr & \zxNone{}
\end{ZX}
```

`\leftManyDots[⟨text scale⟩][⟨dots scale⟩]{⟨text⟩}`

Shortcut to add a dots and a text next to it. It automatically adds the new column, see more examples below. Internally, it uses `3 dots` to place the dots, and can be reproduced using the other nodes around. Note that this node automatically adds a new cell, so you should *not* use `&`.



```
\begin{ZX}
  \leftManyDots{n} \zxX{\alpha}
\end{ZX}
```

`\leftManyDots[⟨text scale⟩][⟨dots scale⟩]{⟨text⟩}`

Shortcut to add a dots and a text next to it. It automatically adds the new column, see more examples below.



```
\begin{ZX}
  \zxX{\alpha} \rightManyDots{m}
\end{ZX}
```

`\middleManyDots`


Shortcut to add a dots and a text next to it, see more examples below.



```
\begin{ZX}
  \zxX{\alpha} \middleManyDots{} & \zxX{\beta}
\end{ZX}
```

`\zxLoop[⟨direction angle⟩][⟨opening angle⟩][⟨other styles⟩]`

Adds a loop in $\langle direction\ angle \rangle$ (defaults to 90), with opening angle $\langle opening\ angle \rangle$ (defaults to 20).



```
\begin{ZX}
  \zxX{\alpha} \zxLoop{} & \zxX{} \zxLoop[45]{} & \zxX{} \zxLoop[0][30][red]{}
\end{ZX}
```


`\zxLoopAboveDots[⟨opening angle⟩][⟨other styles⟩]`

Adds a loop above the node with some dots.



```
\begin{ZX}
  \zxX{\alpha} \zxLoopAboveDots{}
\end{ZX}
```

The previous commands can be useful to create this figure:




```
% Forces code/example on two lines.
\begin{ZX}
  \leftManyDots{n} \zxX{\alpha} \zxLoopAboveDots{} \middleManyDots{} \ar[r,o'={a=75}]
    & \zxX{\beta} \zxLoopAboveDots{} \rightManyDots{m}
\end{ZX}
```

<code>/zx/styles/rounded style/content vertically centered</code>	(style, no value)
<code>/zx/styles/rounded style/content fixed baseline</code>	(style, no value)
<code>/zx/styles/rounded style preload/content vertically centered</code>	(style, no value)
<code>/zx/styles/rounded style preload/content fixed baseline</code>	(style, no value)


`/zx/styles/rounded style preload/content fixed also frac` (style, no value)

By default the content of the nodes are vertically centered. This can be nice to have as much space as possible around the text, but when using several nodes with letters having different height or depth, the baseline of each node won't be aligned (this is particularly visible on nodes with very high text, like b'):




```
\begin{ZX}
  \zxX[a=start]{\alpha} & \zxX{\beta} & \zxX{a} & \zxX{b} & \zxX*{a\pi} & \zxX*{b\pi}
  & \zxX*{b'\pi} & \zxZ*{'b\pi} & \zxZ{(a \oplus b )\pi} & \zxFracX-{\pi}{4}
  & \zxFracZ{\pi}{4} & \zxZ-{\delta} & \zxZ[a=end]-{\gamma}
  \ar[from=start,to=end,on layer=background]
\end{ZX}
```

Using `content fixed baseline`, it is however possible to fix the height and depth of the text to make sure the baselines are aligned (`content vertically centered` is use to come back to the default behavior). When used as a ZX option, it avoids setting this on fractions since it renders poorly. Use `content fixed baseline also frac` if you also want to fix the baseline of all fractions as well (this last style is useful only as a ZX option, since `content fixed baseline` works on all nodes).




```
\begin{ZX}[content fixed baseline]
  \zxX[a=start]{\alpha} & \zxX{\beta} & \zxX{a} & \zxX{b} & \zxX*{a\pi} & \zxX*{b\pi}
  & \zxX*{b'\pi} & \zxZ*{'b\pi} & \zxZ{(a \oplus b )\pi} & \zxFracX-{\pi}{4}
  & \zxFracZ{\pi}{4} & \zxZ-{\delta} & \zxZ[a=end]-{\gamma}
  \ar[from=start,to=end,on layer=background]
\end{ZX}
```

Note however that the height is really hardcoded (not sure how to avoid that) and is quite small (otherwise nodes quickly become too large), so too large content may overlay on top of the node (this is visible on the $b'\pi$ node). You can use this style either on a per-picture basis (it's what we just did), on a per-node basis (just use it in the options of the node), or globally:



```
\tikzset{
  /zx/user overlay/.style={
    content fixed baseline,
  },
}
\begin{ZX}
  \zxX[a=start]{\alpha} & \zxX{\beta} & \zxX{a} & \zxX{b} & \zxX*{a\pi} & \zxX*{b\pi}
  & \zxX*{b'\pi} & \zxZ*{'b\pi} & \zxZ{(a \oplus b )\pi} & \zxFracX-{\pi}{4}
  & \zxFracZ{\pi}{4} & \zxZ-{\delta} & \zxZ[a=end]-{\gamma}
  \ar[from=start,to=end,on layer=background]
\end{ZX}
```

It can also be practical to combine it with `small minus`:



```
\begin{ZX}
  \zxZ-{\delta_j} & \zxZ[content fixed baseline]-{\delta_j} &
  \zxZ[small minus]-{\delta_j} & \zxZ[content fixed baseline,small
  minus]-{\delta_j}
\end{ZX}
```

4.3 Phase in label style

We also provide styles to place the phase on a label next to an empty node (not yet very well tested):

<code>/zx/styles/rounded style/phase in content</code>	(style, no value)
<code>/zx/styles/rounded style/phase in label=style</code>	(style, default)
<code>/zx/styles/rounded style/pil=style</code>	(style, default)
<code>/zx/styles/rounded style/phase in label above=style</code>	(style, default)
<code>/zx/styles/rounded style/pila=style</code>	(style, default)
<code>/zx/styles/rounded style/phase in label below=style</code>	(style, default)
<code>/zx/styles/rounded style/pilb=style</code>	(style, default)
<code>/zx/styles/rounded style/phase in label right=style</code>	(style, default)
<code>/zx/styles/rounded style/pilr=style</code>	(style, default)
<code>/zx/styles/rounded style/phase in label left=style</code>	(style, default)
<code>/zx/styles/rounded style/pill=style</code>	(style, default)

The above styles are useful to place a spider phase in a label outside the node. They can either be put on the style of a node to modify a single node at a time:



```
\zx{\zxX[phase in label]{\alpha} \rar & \zxX{\alpha}}
```

It can also be configured on a per-figure basis:



```
\zx[phase in label right]{
  \zxZ{\alpha} \dar \\
  \zxX{\alpha} \dar \\
  \zxZ{}}

```

or globally:



```
\tikzset{
  /zx/user overlay/.style={
    phase in label={label position=-45, text=purple,fill=none}
  }
}
\zx{
  \zxFracX-{\pi}{2}
}

```

Note that we must use `user post preparation labels` and not `/zx/user overlay nodes` because this will be run after all the machinery for labels has been setup.


While `phase in content` forces the content of the node to be inside the node instead of inside a label (which is the default behavior), all other styles are special cases of `phase in label`. The `<style>` parameter can be any style made for a tikz label:



```
\zx{
  \zxX[phase in label={label position=45, text=purple}]{\alpha}
}

```


For ease of use, the special cases of label position `above`, `below`, `right` and `left` have their respective shortcut style. The `pil*` versions are shortcuts of the longer style written above. For instance, `pilb` stands for `phase in label below`. Note also that by default labels will take some space, but it's possible to make them overlay without taking space using the `overlay` label style... however do it at your own risks as it can overlay the content around (also the text before and after):





```
\zx{
  \zxZ[pilb]{\alpha+\beta} \rar & \zxX[pilb]{\gamma} \rar & \zxZ[pilb=overlay]{\gamma+\eta}
}

```

The above also works for fractions:

 `\zx{\zxFracX[pilr]}{-\pi}{2}`

For fractions, you can configure how you want the label text to be displayed, either in a single line (default) or on two lines, like in nodes. The function `\zxConvertToFracInLabel` is in charge of that conversion, and can be changed to your needs to change this option document-wise. To use the same notation in both content and labels, you can do:

Compare  with  (exact same code!)

```
Compare
\begin{ZX}[phase in label right]
  \zxFracZ{\pi}{2} \dar \l
  \zxFracZ{a+b}{(a+b)}{(c+d)}{c+d}
\end{ZX} with
{\RenewExpandableDocumentCommand{\zxConvertToFracInLabel}{mmmm}{
  \zxConvertToFracInContent{#1}{#2}{#3}{#4}{#5}%
}
\begin{ZX}[phase in label right]
  \zxFracZ{\pi}{2} \dar \l
  \zxFracZ{a+b}{(a+b)}{(c+d)}{c+d}
\end{ZX} (exact same code!)
}
```

Note that in `\zxFracZ{a+b}{(a+b)}{(c+d)}{c+d}` the optional arguments are useful to put parens appropriately when the fraction is written inline.


`\zxDebugMode`

If this macro is defined, debug mode is active. See below how it can be useful.

`/tikz/every node/a=alias` (style, no default)

Shortcut to add an `alias` to a wire, and in debug mode it also displays the alias of the nodes next to it (very practical to quickly add wires as we will see later). To enable debug mode, just type `\def\xzDebugMode{}` before your drawing, potentially in a group like `{\def\xzDebugMode{ } your diagram...}` if you want to apply it to a single diagram.

This will be very practical later when using names instead of directions to connect wires (this can improve readability and maintainability). This is added automatically in `/tikz/every node` style. Note that debug mode is effective only for `a` and not `alias`.



```
\begin{ZX}
  \zxX[a=A]{} & \zxZ[a=B]{\beta}
  \ar[from=A,to=B]
\end{ZX}
{\def\xzDebugMode{ } %% Enable debug mode for next diagram%
\begin{ZX}
  \zxX[a=A]{} & \zxZ[a=B]{\beta}
  \ar[from=A,to=B]
\end{ZX}
}
```


`/zx/defaultEnv/math baseline=node alias` (style, no default)

You can easily change the default baseline which defaults to:

```
baseline={([yshift=-axis_height]current bounding box.center)}
```

(`axis_height` is the distance to use to center equations on the “mathematical axis”) by using this in the `\zx[options]{...}`. However, this can be a bit long to write, so

`math baseline=yourAlias` is a shortcut to `baseline={([yshift=-axis_height]yourAlias)}`:




```

Compare $\begin{ZX}
  \leftManyDots{n} \ \zxX{\alpha} \ \zxLoopAboveDots{} \ \middleManyDots{} \ \var[r,o'={a=75}]
  \& \ \zxX{\beta} \ \zxLoopAboveDots{} \ \rightManyDots{m}
\end{ZX}
= {\def\zxDefaultSoftAngleS{20} % useful to make the angle in \leftManyDots{} nicer.
  \begin{ZX}
    \leftManyDots{n} \ \zxX{\alpha+\beta} \ \rightManyDots{m}
  \end{ZX}}$ with $\begin{ZX}[math baseline=wantedBaseline]
  \leftManyDots{n} \ \zxX{\alpha} \ \zxLoopAboveDots{} \ \middleManyDots{} \ \var[r,o'={a=75}]
  %% See here --v the node chosen as the baseline
  \& \ \zxX[a=wantedBaseline]{\beta} \ \zxLoopAboveDots{} \ \rightManyDots{m}
\end{ZX}
= {\def\zxDefaultSoftAngleS{20} % useful to make the angle in \leftManyDots{} nicer.
  \begin{ZX}
    \leftManyDots{n} \ \zxX{\alpha+\beta} \ \rightManyDots{m}
  \end{ZX}}$

```

Also, if you find your diagram a bit “too high”, check that you did not forget to remove a trailing `\` at the end of the last line:



```

Compare $\begin{ZX}
  \zxZ{} \ \var[o'] \ \var[o.] \ \& \ \zxX{} \\
  \zxZ{} \ \var[o'] \ \var[o.] \ \var[r] \ \& \ \zxX{} \\
\end{ZX} = \zx{\zxEmptyDiagram}$ with $\begin{ZX}
  \zxZ{} \ \var[o'] \ \var[o.] \ \& \ \zxX{} \\
  \zxZ{} \ \var[o'] \ \var[o.] \ \var[r] \ \& \ \zxX{}
\end{ZX} = \zx{\zxEmptyDiagram}$


```

4.4 Wires


4.4.1 Creating wires and debug mode

`\arrow[⟨options⟩]`
`\ar[⟨options⟩]`

These synonym commands (actually coming from `tikz-cd`) are used to draw wires between nodes. We refer to `tikz-cd` for an in-depth documentation, but what is important for our purpose is that the direction of the wires can be specified in the `⟨options⟩` using a string of letters `r` (right), `l` (left), `u` (up), `d` (down). It’s also possible to specify a node alias as a source or destination as shown below.



`⟨options⟩` can also be used to add any additional style, either custom ones, or the ones defined in this library (this is recommended since it can be easily changed document-wise by simply changing the style). Multiple wires can be added in the same cell. Other shortcuts provided in `tikz-cd` like `\rar...` can be used.



```
\begin{ZX}
\zxZ{\alpha} \arrow[d, C] % C = Bell-like wire
\ar[r,H,o'] % o' = top part of circle
% H adds Hadamard, combine with \zxHCol
\ar[r,H,o.] & [\zxHCol] \zxZ{\gamma} \\
\zxZ{\beta} \rar & \zxX{} \ar[ld,red,"circ" {marking,blue}] \ar[rd,s] \\
\zxFracX{-\pi}{4} & & \zxZ{}
\end{ZX}
```

As explained in `tikz-cd`, there are further shortened forms:


```
\rar[options]
\lar[options]
\dar[options]
\uar[options]
\drar[options]
\urar[options]
\dlar[options]
\ular[options]
```

The first one is equivalent to

```
\arrow[options]{r}
```

and the other ones work analogously.

Note that sometimes, it may be practical to properly organize big diagrams to increase readability. To that end, one surely wants to have a small and well indented matrix (emacs `M-x align-current` or `M-x align` (for selected lines) commands are very practical to indent matrices automatically). Unfortunately, adding wires inside the matrix can make the line really long and hard to read. Similarly, some nodes involving fractions or long expressions can also be quite long. It is however easy to increase readability (and maintainability) by moving the wires at the very end of the diagram, using `a` (like `alias`, but with a debug mode) to connect nodes and `\def` to create shortcuts. Putting inside a macro with `\def` long node definitions can also be useful to keep small items in the matrix:




```

\begin{ZX}[zx row sep=1pt,
execute at begin picture={%
  %% Definition of long items (the goal is to have a small and readable matrix
  % (warning: macro can't have numbers in TeX. Also, make sure not to use existing names)
  \def\Zpifour{\zxFracZ[a=Zpi4]{\pi}{4}}%
  \def\mypitwo{\zxFracX[a=myspi2]{\pi}{2}}%
}]
%% Matrix: in emacs "M-x align-current" is practical to automatically format it.
%% a is for 'alias'... but also provides a debug mode, see below.
\zxN[a=in1]{} & \zxX[a=X1]{} & & \zxZ[a=toprightpi]{\pi} \\
\zxN[a=in2]{} & \zxX[a=X1]{} & & \zxN[a=out1]{} \\
\zxN[a=in2]{} & \Zpifour{} & \mypitwo{} & \zxN[a=out2]{} \\
%% Arrows
% Column 1
\ar[from=in1,to=X1]
\ar[from=in2,to=Zpi4]
% Column 2
\ar[from=X1,to=xmiddle,(.]
\ar[from=X1,to=toprightpi,<',H]
\ar[from=Zpi4,to=xmiddle,(.]
\ar[from=Zpi4,to=Xdown,o.]
% Column 3
\ar[from=xmiddle,to=Xdown,s.]
\ar[from=xmiddle,to=myspi2]
% Column 4
\ar[from=myspi2,to=toprightpi,(.]
\ar[from=myspi2,to=out1,<']
\ar[from=myspi2,to=out2]
\ar[from=Xdown,to=out3]
\end{ZX}

```

In that setting, it is often useful to enable the debug mode via `\def\zxDebugMode{}` as explained above to quickly visualize the alias given to each node (note that debug mode works with `a=` but not with `alias=`). For instance, it was easy to rewrite the above diagram by moving nodes in the matrix and arrows after checking their name on the produced pdf (NB: you can increase `column sep` and `row sep` temporarily to make the debug information more visible):




```

{
\def\zxDebugMode{}%%
\begin{ZX}[zx row sep=1pt,
execute at begin picture={%
%% Definition of long items (the goal is to have a small and readable matrix
% (warning: macro can't have numbers in TeX. Also, make sure not to use existing names)
\def\Zpifour{\zxFracZ[a=Zpi4]-{\pi}{4}}%
\def\mypitwo{\zxFracX[a=mypi2]{\pi}{2}}%
}
]
%% Matrix: in emacs "M-x align" is practical to automatically format it. a is for 'alias'
& \zxN[a=n]{} & \zxZ[a=xmiddle]{} & & \zxN[a=out1]{} \\\
\zxN[a=in1]{} & \Zpifour{} & \zxX[a=Xdown]{} & & \mypitwo{} & & \\\
& & & & & & \\\
\zxN[a=in2]{} & \zxX[a=X1]{} & \zxZ[a=toprightpi]{\pi} & & & & \\\
%% Arrows
% Column 1
\ar[from=in1,to=X1,s]
\ar[from=in2,to=Zpi4,.>]
% Column 2
\ar[from=X1,to=xmiddle,N']
\ar[from=X1,to=toprightpi,H]
\ar[from=Zpi4,to=n,C] \ar[from=n,to=xmiddle,wc]
\ar[from=Zpi4,to=Xdown]
% Column 3
\ar[from=xmiddle,to=Xdown,C-]
\ar[from=xmiddle,to=mypi2,)]
% Column 4
\ar[from=mypi2,to=toprightpi,(']
\ar[from=mypi2,to=out1,<']
\ar[from=mypi2,to=out2,<.]
\ar[from=Xdown,to=out3,<.]
\end{ZX}
}

```


4.4.2 Wire styles (new generation)

We give now a list of wire styles provided in this library (`/zx/wires definition/` is an automatically loaded style). We recommend using them instead of manual styling to ensure they are the same document-wise, but they can of course be customized to your need. Note that the name of the styles are supposed (ahah, I do my best with what ASCII provides) to graphically represent the action of the style, and some characters are added to precise the shape: typically ' means top, . bottom, X- is right to X (or should arrive with angle 0), -X is left to X (or should leave with angle zero). These shapes are usually designed to work when the starting node is left most (or above of both nodes have the same column). But they may work both way for some of them.

Note that the first version of that library (which appeared one week before this new version... hopefully backward compatibility won't be too much of a problem) was using `in=` and `out=` to create these styles. However, it turns out to be not very reliable since the shape of the wire was changing (sometimes importantly) depending on the position of the nodes. This new version should be more reliable, but the older styles are still available by using `IO`, `nameOfWirestyle` (read more in section 4.4.3).

<code>/zx/wires definition/C=radius ratio</code>	(style, default 1)
<code>/zx/wires definition/C.=radius ratio</code>	(style, default 1)
<code>/zx/wires definition/C'=radius ratio</code>	(style, default 1)
<code>/zx/wires definition/C-=radius ratio</code>	(style, default 1)

Bell-like wires with an arrival at “right angle”, C represents the shape of the wire, while . (bottom), ' (top) and - (side) represent (visually) its position. Combine with `wire centered (wc)` to avoid holes when connecting multiple wires (not required with `\zxNone{}`, alias `\zxN{}`).

A Bell pair \subset , a swapped Bell pair $\subset\subset$ and a funny graph .

```

A Bell pair \zx{\zxNone{} \ar[d,C] \\\[\\zxWRow]
            \zxNone{}}
, a swapped Bell pair
\begin{ZX}
  \zxN{} \ar[d,C] \ar[rd,s] & \\\zxWCol] \zxN{} \\\[\\zxWRow]
  \zxN{} \ar[ru,s] & \zxN{}
\end{ZX}
and a funny graph
\begin{ZX}
  \zxX{} \ar[d,C] \ar[r,C'] & \zxZ{} \ar[d,C-] \\\
  \zxZ{} \ar[r,C.] & \zxX{}
\end{ZX}.

```

Note that this style is actually connecting the nodes using a perfect circle (it is *not* based on `curve to`), and therefore should *not* be used together with `in`, `out`, `looseness`... (this is the case also for most other styles except the ones in `IO`). It has the advantage of connecting nicely nodes which are not aligned or with different shapes:




```

\begin{ZX}
  \zxX{\alpha} \ar[dr,C] \\\
  & \zxNone{}
\end{ZX}

```

The `\radius ratio` parameter can be used to turn the circle into an ellipse using this ratio between both axis:



```

\begin{ZX}
  \zxX{\alpha}
  \ar[dr,C=0.5,red]
  \ar[dr,C,green]
  \ar[dr,C=2,blue]
  \ar[dr,C=3,purple] \\\
  & \zxNone{}
\end{ZX}
\begin{ZX}
  \zxX{} \ar[d,C=2] \ar[r,C'=2] & \zxZ{} \ar[d,C=-2,H] \\\
  \zxZ{} \ar[r,C.=2] & \zxX{}
\end{ZX}.

```

`/zx/wires definition/o'=angle` (style, default 40)
`/zx/wires definition/o.=angle` (style, default 40)
`/zx/wires definition/o-=angle` (style, default 40)
`/zx/wires definition/-o=angle` (style, default 40)

Curved wire, similar to `C` but with a soften angle (optionally specified via `\angle`), and globally editable with `\zxDefaultLineWidth`). Again, the symbols specify which part of the circle (represented with `o`) must be kept.




```

\begin{ZX}
  \zxX{} \ar[d,-o] \ar[d,o-] \\\
  \zxZ{} \ar[r,o'] \ar[r,o.] & \zxX{}
\end{ZX}.

```

Note that these wires can be combined with `H`, `X` or `Z`, in that case one should use appropriate column and row spacing as explained in their documentation:



```

\begin{ZX}
  \zxX{\alpha} \ar[d,-o,H] \ar[d,o-,H] \\\[\\zxHRow]
  \zxZ{\beta} \rar & \zxZ{} \ar[r,o',X] \ar[r,o.,Z] & \\\zxSCol] \zxX{}
\end{ZX}.

```

`/zx/wires definition/(=angle` (style, default 30)
`/zx/wires definition/)=angle` (style, default 30)
`/zx/wires definition/('=angle` (style, default 30)

`/zx/wires definition/('=angle` (style, default 30)

Curved wire, similar to `o` but can be used for diagonal items. The angle is, like in `bend right`, the opening angle from the line which links the two nodes. For the first two commands, the `(` and `)` symbols must be imagined as if the starting point was on top of the parens, and the ending point at the bottom.



```
\begin{ZX}
\zxX{} \ar[rd, (] \ar[rd, ), red] \\
& \zxZ{}
\end{ZX}.
```

Then, `('=` (`(` and `(.=`); this notation is, I think, more intuitive when linking nodes from left to right. `('` is used when going to top right and `(.` when going to bottom right.



```
\begin{ZX}
\zxN{} & \zxX{} \\
\zxZ{} \ar[ru, ('] \ar[rd, (.] & \\
& \zxX{}
\end{ZX}
```


When the nodes are too far appart, the default angle of 30 may produce strange results as it will go above (for `('`) the vertical line. Either choose a shorter angle, or see `<'` instead. Note that for now this node is based on `in` and `out`, but it may change later. So if you want to change looseness, or really rely on the precise specified angle, prefer to use `IO, (` instead (which takes the `IO` version, guaranteed to stay untouched).

```
/zx/wires definition/start fake center north (style, no value)
/zx/wires definition/start fake center south (style, no value)
/zx/wires definition/start fake center east (style, no value)
/zx/wires definition/start fake center west (style, no value)
/zx/wires definition/start real center (style, no value)
/zx/wires definition/end fake center north (style, no value)
/zx/wires definition/end fake center south (style, no value)
/zx/wires definition/end fake center east (style, no value)
/zx/wires definition/end fake center west (style, no value)
/zx/wires definition/end real center (style, no value)
/zx/wires definition/left to right (style, no value)
/zx/wires definition/right to left (style, no value)
/zx/wires definition/up to down (style, no value)
/zx/wires definition/down to up (style, no value)
/zx/wires definition/force left to right (style, no value)
/zx/wires definition/force right to left (style, no value)
/zx/wires definition/force up to down (style, no value)
/zx/wires definition/force down to up (style, no value)
/zx/wires definition/no fake center (style, no value)
```

Usually each wire should properly use these functions, so the end user should not need that too often (during a first reading, you can skip this paragraph). We added 4 anchors to nodes: `fake center north`, `fake center south`, `fake center east` and `fake center west`. These anchors are used to determine the starting point of the wires depending on the direction of the wire (I tried to use more complex methods to ensure the wires would start on the boundary, but they all fail⁶). Because some nodes may not have these anchors, we can't directly set `start anchor=fake center north`, on `layer=edgelay` (but the user can do that if they are using only nodes with these anchors) or the code may fail on some nodes. For that reason, we check that these anchors exist while drawing our wires (which, at the best of my knowledge, can only be done while drawing the path). The `start/end fake center *` code is responsible to configure that properly (`start real center` will use the real center), and `left to right` (and similar) just configure both the `start` and `end` point to ensure the node

⁶<https://tex.stackexchange.com/questions/619274>

starts at the appropriate anchor. However this won't work for style not defined in this library: in case you are sure that these anchors exists and want to use your own wire styles, you can then set the anchors manually and use `on layer=edgelay`, or use `force left to right` (and similar) which will automatically do that for the `start` and `end` points.



```
\begin{ZX}
\zxX{\alpha+\beta} \ar[r,o',no fake center] & \zxZ{\alpha+\beta} \\
\zxX{\alpha+\beta} \ar[r,o'] & \zxZ{\alpha+\beta}
\end{ZX}
```

<code>/zx/args/-andL/-=x</code>	(style, no default)
<code>/zx/args/-andL/1-=x</code>	(style, no default)
<code>/zx/args/-andL/2-=x</code>	(style, no default)
<code>/zx/args/-andL/L=y</code>	(style, no default)
<code>/zx/args/-andL/1L=y</code>	(style, no default)
<code>/zx/args/-andL/2L=y</code>	(style, no default)
<code>/zx/args/-andL/1 angle and length={\langle angle\rangle}\{\langle length\rangle\}</code>	(style, no default)
<code>/zx/args/-andL/1al={\langle angle\rangle}\{\langle length\rangle\}</code>	(style, no default)
<code>/zx/args/-andL/2 angle and length={\langle angle\rangle}\{\langle length\rangle\}</code>	(style, no default)
<code>/zx/args/-andL/2al={\langle angle\rangle}\{\langle length\rangle\}</code>	(style, no default)
<code>/zx/args/-andL/angle and length={\langle angle\rangle}\{\langle length\rangle\}</code>	(style, no default)
<code>/zx/args/-andL/al={\langle angle\rangle}\{\langle length\rangle\}</code>	(style, no default)
<code>/zx/args/-andL/1 angle={\langle angle\rangle}</code>	(style, no default)
<code>/zx/args/-andL/1a={\langle angle\rangle}</code>	(style, no default)
<code>/zx/args/-andL/2 angle={\langle angle\rangle}</code>	(style, no default)
<code>/zx/args/-andL/1a={\langle angle\rangle}\{\langle length\rangle\}</code>	(style, no default)
<code>/zx/args/-andL/angle={\langle angle\rangle}</code>	(style, no default)
<code>/zx/args/-andL/a={\langle angle\rangle}</code>	(style, no default)
<code>/zx/args/-andL/symmetry-L</code>	(style, no value)
<code>/zx/args/-andL/symmetry</code>	(style, no value)
<code>/zx/args/-andL/negate1L</code>	(style, no value)
<code>/zx/args/-andL/negate2L</code>	(style, no value)
<code>/zx/args/-andL/negateL</code>	(style, no value)
<code>/zx/args/-andL/negate1-</code>	(style, no value)
<code>/zx/args/-andL/negate2-</code>	(style, no value)
<code>/zx/args/-andL/negate-</code>	(style, no value)
<code>/zx/args/-andL/oneMinus1-</code>	(style, no value)
<code>/zx/args/-andL/oneMinus2-</code>	(style, no value)
<code>/zx/args/-andL/oneMinus1L</code>	(style, no value)
<code>/zx/args/-andL/oneMinus2L</code>	(style, no value)

The next wires can take multiple options. They are all based on the same set of options for now, namely `/zx/args/-andL/`. The `1*` options are used to configure the starting point, the `2*` to configure the ending point, if no number is given both points are updated. `-` and `L` are used to place two anchors of a Bezier curve. They are expressed in relative distance (so they are typically between 0 and 1, but can be pushed above 1 or below 0 for stronger effects), `-` is typically on the `x` axis and `L` on the `y` axis (the name represents “graphically” the direction). They are however not named `x` and `y` because some wires use them slightly differently, notably `o` which uses `-` for the direction of the arrow and `L` for the direction perpendicular to the arrow (again the shape of `L` represents a perpendicular line). Each wire interprets `-` and `L` to ensure that 0 should lead to a straight line, and that a correct shape is obtained when `1-` equals `2-`, `1L` equals `2L` (except for non-symmetric shapes of course), and both `-` and `L` are positive.


The other expressions involving `angle` (or the shortcut `a`) allow you to define `1-`, `1L`... using a maybe more intuitive “polar” notation, i.e. an “angle” and a relative length (if not specified, like in `1 angle`, the length defaults to 0.6). Note that the angle is not really an angle (it is an angle only when the nodes are placed at 45 degrees, or for the `bezier x/y` variations), but a “squeezed angle” (when nodes are not at 45 degrees, the shape is squeezed horizontally or

vertically not to change the wire) and similarly for the length. In the above list, the meaning of each expression should be clear from the name: for instance `1angle and length={45}{.8}` will setup a squeezed angle of 45 and a relative length of .8 for the first point, i.e. this is equivalent to $1- = .8 \cos(45)$ and $1L = .8 \sin(45)$, and `angle=45` will change the angle of both points to 45, with a relative length of .6. In the above list, each long expression has below it a shorter version, for instance `a=45` is equivalent to `angle=45`.

The last expressions (`symmetry-L`, `symmetry...`) are used internally to do some math. Of course if you need to do symmetries at some point you can use these keys (`symmetry-L` exchange - and L, and `symmetry` exchanges 1 and 2), `negateX` just negates `X` and `oneMinusX` replaces `X` with `1-X`. Each of the following nodes have default values which can be configured as explained in section 5.2.


<code>/zx/wires definition/s=-andL config</code>	(style, default defaultS)
<code>/zx/wires definition/s'=-andL config</code>	(style, default defaultS')
<code>/zx/wires definition/s.=-andL config</code>	(style, default defaultS')
<code>/zx/wires definition/-s=-andL config</code>	(style, default default-S)
<code>/zx/wires definition/-s'=-andL config</code>	(style, default {defaultS',default-S})
<code>/zx/wires definition/-s.=-andL config</code>	(style, default {defaultS',default-S})
<code>/zx/wires definition/s=-andL config</code>	(style, default {defaultS',default-S,symmetry})
<code>/zx/wires definition/s'=-andL config</code>	(style, default {defaultS',default-S,symmetry})
<code>/zx/wires definition/s.=-andL config</code>	(style, default {defaultS',default-S,symmetry})
<code>/zx/wires definition/-S=-andL config</code>	(style, default {defaultS',default-S})
<code>/zx/wires definition/-S'=-andL config</code>	(style, default {defaultS',default-S})
<code>/zx/wires definition/-S.=-andL config</code>	(style, default {defaultS',default-S})
<code>/zx/wires definition/S=-andL config</code>	(style, default {defaultS',default-S,symmetry})
<code>/zx/wires definition/S'=-andL config</code>	(style, default {defaultS',default-S,symmetry})
<code>/zx/wires definition/S.=-andL config</code>	(style, default {defaultS',default-S,symmetry})

`s` and `S` are used to create a s-like wire, to have nicer diagonal lines between nodes. Other versions are soft versions (the input and output angles are not as sharp. Adding `'` or `.` specifies if the wire is going up-right or down-right, however as of today if it mostly used for backward compatibility since, for instance, `-s'` is the same as `-s` (but some styles may want to do a difference later). The only exception is for `s/s'/s.`: `s` has a sharper output angle than `s'` and `s.` (which are both equals).




```
\begin{ZX}
  \zxX{\alpha} \ar[s,rd] \\\
  & \& \zxZ{\beta} \\\
  \zxX{\alpha} \ar[s.,rd] \\\
  & \& \zxZ{\beta} \\\
  & \& \zxZ{\alpha} \\\
  \zxX{\beta} \ar[S,ru] \\\
  & \& \zxZ{\alpha} \\\
  \zxX{\beta} \ar[s',ru] \\\
\end{ZX}
```

- forces the angle on the side of - to be horizontal. Because for now the wires start inside the node, this is not very visible. For that reason, versions with a capital `S` have an anchor on the side of - lying on the surface of the node (`S` has two such anchors since both inputs and outputs arrives horizontally) instead of on the `fake center *` anchor (see explanation on `fake center` anchors above).




```
\begin{ZX}
  \zxX{\alpha} \ar[s.,rd] \\\
                                & \zxZ{\beta} \\\
  \zxX{\alpha} \ar[-s.,rd] \\\
                                & \zxZ{\beta} \\\
  \zxX{\alpha} \ar[s.-,rd] \\\
                                & \zxZ{\beta} \\\
  \zxX{\alpha} \ar[S,rd] \\\
                                & \zxZ{\beta} \\\
\end{ZX}
```

It is possible to configure it using the options in `-andL config` as explained above (default values are given in section 5.2), where `-` is the (relative) position of the horizontal Bezier anchor and `L` its relative vertical position (to keep a `s`-shape, you should have `->L`).



```
\begin{ZX}
  \zxX{\alpha} \ar[rd,s.] \\\
                                & \zxZ{\beta} \\\
  % same as s., configure globally using defaultS' \\\
  \zxX{\alpha} \ar[rd,s.={-=.8,L=.2}] \\\
                                & \zxZ{\beta} \\\
  \zxX{\alpha} \ar[rd,s.={L=.4}] \\\
                                & \zxZ{\beta} \\\
  \zxX{\alpha} \ar[rd,s.={L=0.1,-=1}] \\\
                                & \zxZ{\beta} \\\
  \zxX{\alpha} \ar[rd,edge above, control points visible,s.={-2}] \\\
                                & \zxZ{\beta} \\\
\end{ZX}
```

For the non-symmetric versions (involving a vertical arrival), you can configure each point separately using `1-` and `1L` (first point) and `2-` and `2L` (second points). You can also specify the “squeezed angle” and “length” of each point, for instance using the `1 angle` and `length={10}{.8}` option (short version is `1al={10}{.8}`) or both at the same time using `al={10}{.6}` (this last command being itself equivalent to `a=10`). As explained later `edge above` and `control points visible` can help you to visualize the control points of the underlying Bezier curve.




```
\begin{ZX}
  \zxZ{} \ar[dr,s.={al={10}{.8}}] \\\ & \zxZ{} \\\
  \zxZ{} \ar[edge above,control points visible,dr,s.={a=10}] \\\ & \zxZ{} \\\
\end{ZX}
```

<code>/zx/wires definition/ss=-andL config</code>	<code>(style, default {defaultS,symmetry-L})</code>
<code>/zx/wires definition/SS=-andL config</code>	<code>(style, default {defaultS,symmetry-L})</code>
<code>/zx/wires definition/ss.=-andL config</code>	<code>(style, default {defaultS',symmetry-L})</code>
<code>/zx/wires definition/.ss=-andL config</code>	<code>(style, default {defaultS',symmetry-L}30)</code>
<code>/zx/wires definition/sIs=-andL config</code>	<code>(style, default defaultSIS)</code>
<code>/zx/wires definition/.sIs=-andL config</code>	<code>(style, default {defaultS',defaultSIS})</code>
<code>/zx/wires definition/ss.I=-andL config</code>	<code>(style, default</code>
<code> {defaultS',defaultSIS,symmetry})</code>	
<code>/zx/wires definition/I.ss=-andL config</code>	<code>(style, default</code>
<code> {defaultS',defaultSIS,symmetry})</code>	
<code>/zx/wires definition/SIS=-andL config</code>	<code>(style, default {defaultS',defaultSIS})</code>

`/zx/wires definition/.SIS=-andL config` (style, default {defaultS',defaultSIS})
`/zx/wires definition/ISS=-andL config` (style, default {defaultS',defaultSIS,symmetry})
`/zx/wires definition/SS.I=-andL config` (style, default {defaultS',defaultSIS,symmetry})
`/zx/wires definition/I.SS=-andL config` (style, default {defaultS',defaultSIS,symmetry})
`/zx/wires definition/SSI=-andL config` (style, default {defaultS',defaultSIS,symmetry})

`ss` is similar to `s` except that we go from top to bottom instead of from left to right. The position of `.` says if the node is wire is going bottom right (`ss.`) or bottom left (`.ss`).




```

\begin{ZX}
  \zxX{\alpha} \ar[ss,rd] \\\
                                & \zxZ{\beta} \\\
  \zxX{\alpha} \ar[ss.,rd] \\\
                                & \zxZ{\beta} \\\
                                & \zxX{\beta} \ar[.ss,d1] \\\
  \zxZ{\alpha} \\\
                                & \zxX{\beta} \ar[.ss={},d1] \\\
  \zxZ{\alpha} \\\
\end{ZX}

```

`I` forces the angle above (if in between the two `s`) or below (if on the same side as `.`) to be vertical.




```

\begin{ZX}
  \zxX{\alpha} \ar[ss,rd] \\\
                                & \zxZ{\beta} \\\
  \zxX{\alpha} \ar[sIs.,rd] \\\
                                & \zxZ{\beta} \\\
  \zxX{\alpha} \ar[ss.I,rd] \\\
                                & \zxZ{\beta} \\\
                                & \zxX{\beta} \ar[.sIs,d1] \\\
  \zxZ{\alpha} \\\
                                & \zxX{\beta} \ar[I.ss,d1] \\\
  \zxZ{\alpha} \\\
\end{ZX}

```

The `S` version forces the anchor on the vertical line to be on the boundary.




```

\begin{ZX}
  \zxX{\alpha} \ar[SS,rd] \\\
                                & \zxZ{\beta} \\\
  \zxX{\alpha} \ar[SIS,rd] \\\
                                & \zxZ{\beta} \\\
  \zxX{\alpha} \ar[SSI,rd] \\\
                                & \zxZ{\beta} \\\
                                & \zxX{\beta} \ar[.sIs,d1] \\\
  \zxZ{\alpha} \\\
                                & \zxX{\beta} \ar[I.ss,d1] \\\
  \zxZ{\alpha} \\\
\end{ZX}

```



As for `s` it can be configured:



```
\begin{ZX}
\zxX{\alpha} \ar[rd,SIS] \\\
& \zxZ{\beta} \\\
\zxX{\alpha} \ar[rd,SIS={1L=.4}] \\\
& \zxZ{\beta} \\\
\zxX{\alpha} \ar[rd,SIS={1L=.8}] \\\
& \zxZ{\beta} \\\
\zxX{\alpha} \ar[rd,SIS={1L=1,2L=1}] \\\
& \zxZ{\beta} \\\
\end{ZX}
```


```
/zx/wires definition/N=-andL config (style, default defaultN)
/zx/wires definition/N'=-andL config (style, default defaultN)
/zx/wires definition/N.=-andL config (style, default defaultN)
/zx/wires definition/-N=-andL config (style, default {defaultN,defaultN-})
/zx/wires definition/-N'=-andL config (style, default {defaultN,defaultN-})
/zx/wires definition/-N.=-andL config (style, default {defaultN,defaultN-})
/zx/wires definition/N=-andL config (style, default {defaultN,defaultN-,symmetry})
/zx/wires definition/N'=-andL config (style, default {defaultN,defaultN-,symmetry})
/zx/wires definition/N.=-andL config (style, default {defaultN,defaultN-,symmetry})
/zx/wires definition/Nbase=-andL config (style, default defaultN)
```

`N` is used to create a left-to-right wire leaving at wide angle and arriving at wide angle (it's named `N` because it roughly have the shape of a capital `N`). In older versions, `'` and `.` was required to specify if the wire should go up-right or down-right, but it is not useful anymore (we keep it for compatibilty with `IO` styles and in case some styles want to do a distinction later).




```
\begin{ZX}
\zxX{\alpha} \ar[N,rd] \\\
& \zxZ{\beta} \\\
& \zxZ{\alpha} \\\
\zxX{\beta} \ar[N,ru]
\end{ZX}
```

- forces the angle on the side of - to be horizontal.



```
\begin{ZX}
\zxX{\alpha} \ar[-N,rd] \\\
& \zxZ{\beta} \\\
& \zxZ{\alpha} \\\
\zxX{\beta} \ar[N-,ru]
\end{ZX}
```

Like other wires, it can be configured using `-` (horizontal relative position of anchor points) and `L` (vertical relative position of anchor points, make sure to have `-<L` to have a `N`-looking shape), `al={angle}{relative length}`...



```
\begin{ZX}
\zxX{\alpha} \ar[N,rd] \\\
& \zxZ{\beta} \\\
\zxX{\alpha} \ar[N={L=1.2},rd] \\\
& \zxZ{\beta}
\end{ZX}
```


All these styles are based on Nbase (which should not be used directly), including the styles like \angle . If you wish to overwrite later N-like commands, but not \angle -like, then change N. If you wish to also update \angle commands, use Nbase.

```
/zx/wires definition/NN=-andL config (style, default {defaultN,symmetry-L,defaultNN})
/zx/wires definition/NN.=andL config (style, default {defaultN,symmetry-L,defaultNN})
/zx/wires definition/.NN=-andL config (style, default {defaultN,symmetry-L,defaultNN})
/zx/wires definition/NIN=-andL config (style, default
{defaultN,symmetry-L,defaultNN,defaultNIN})
/zx/wires definition/INN=-andL config (style, default
{defaultN,symmetry-L,defaultNN,defaultNIN,symmetry})
/zx/wires definition/NNI=-andL config (style, default
{defaultN,symmetry-L,defaultNN,defaultNIN,symmetry})
```

Like N but for diagrams read up-to-down or down-to-up. The \cdot are mainly used for backward compatibility with IO style.

```
/zx/wires definition/<'=-andL config (style, default like N-)
/zx/wires definition/<.=andL config (style, default like N-)
/zx/wires definition/'>=-andL config (style, default like -N)
/zx/wires definition/.>=-andL config (style, default like -N)
/zx/wires definition/'v=-andL config (style, default like INN)
/zx/wires definition/v'=-andL config (style, default like NNI)
```


\angle' and $\angle\cdot$ are similar to $N-$, except that the anchor of the vertical line is put on the boundary (similarly for $\ast>$ and $-N$, $\ast v\ast$ and INN , and \ast^{\ast} and NIN : \cdot^{\cdot} and \cdot^{\cdot} were not possible to put in this documentation since the documentation package does not like the \cdot character). The position of $'$ and \cdot does not really matters anymore in new versions, but for backward compatibility with IO styles, and maybe forward compatibility (another style may need this information), it's cleaner to put \cdot or $'$ on the direction of the wire. It also helps the reader of your diagrams to see the shape of the wire.




```
\begin{ZX}
\zxN{} & \zxZ{}\backslash
\zxX{} \ar[ru,<'] \ar[rd,<.] \backslash
\zxN{} & \zxZ{}\backslash
\end{ZX}
```



```
\begin{ZX}
\zxN{} & \zxZ{}\backslash
\zxX{} \ar[ru,>] \ar[rd,'>] \backslash
\zxN{} & \zxZ{}\backslash
\end{ZX}
```




```
\begin{ZX}
\zxN{} & \zxFracX{\pi}{2} \ar[dl,\cdot^{\cdot}] \ar[dr,\cdot^{\cdot}] & \backslash
\zxZ{} & & \zxX{}
\end{ZX}
```



```
\begin{ZX}
  \zxZ{} &
  \zxN{} & \zxX{} \ar[u1,'v'] \ar[ur,v'] &
\end{ZX}
```

/zx/wires definition/3 dots=text (style, default =)
 /zx/wires definition/3 vdots=text (style, default =)


The styles put in the middle of the wire (without drawing the wire) ... (for 3 dots) or \vdots (for 3 vdots). The dots are scaled according to `\zxScaleDots` and the text $\langle text \rangle$ is written on the left. Use `&[\zxDotsRow]` and `\\[\zxDotsRow]` to properly adapt the spacing of columns and rows.



```
\begin{ZX}
  \zxZ{\alpha} \ar[r,o'] \ar[r,o.]
  \ar[r,3 dots]
  \ar[d,3 vdots={\ell n \ell},] & [\zxDotsCol] \zxFracX{\pi}{2} \\ [\zxDotsRow]
  \zxZ{\alpha} \rar & \zxFracX{\pi}{2}
\end{ZX}
```


/zx/wires definition/H=style (style, default)
 /zx/wires definition/Z=style (style, default)
 /zx/wires definition/X=style (style, default)

Adds a H (Hadamard), Z or X node (without phase) in the middle of the wire. Width of column or rows should be adapted accordingly using `\zxNameRowcolFlatnot` where `Name` is replaced by H, S (for “spiders”, i.e. X or Z), HS (for both H and S) or W, `Rowcol` is either `Row` (for changing row sep) or `Col` (for changing column sep) and `Flatnot` is empty or `Flat` (if the wire is supposed to be a straight line as it requires more space). For instance:



```
\begin{ZX}
  \zxZ{\alpha} \ar[d] \ar[r,o',H] \ar[r,o.,H] & [\zxHCol] \zxX{\beta} \\
  \zxZ{\alpha} \ar[d,-o,X] \ar[d,o-,Z] & \\
  \zxX{\gamma} & \\
\end{ZX}
```

The $\langle style \rangle$ parameter can be used to add additional TikZ style to the nodes, notably a position using `\ar[rd,-N.,H={pos=.35}]`. The reason for using that is that the wires start inside the nodes, therefore the “middle” of the wire is closer to the node when the other side is on an empty node.



```
\begin{ZX}[zx row sep=Opt]
  \zxN{} \ar[rd,-N.,H={pos=.35}] & [\zxwCol,\zxHCol] & [\zxwCol,\zxHCol] \zxN{} \\
  & & & \zxX{\alpha}
  \ar[ru,N',H={pos=1-.35}]
  \ar[rd,N.-,H={pos=1-.35}] & & \\
  \zxN{} \ar[ru,-N',H={pos=.35}] & & \zxN{}
\end{ZX}
```

Note that it’s possible to automatically start wires on the border of the node, but it is slower and create other issues, see section 5.3 for more details. The second option (also presented in this section) is to manually define the `start anchor` and `end anchor`, but it can change the shape of the wire).

<code>/zx/wires definition/wire centered</code>	(style, no value)
<code>/zx/wires definition/wc</code>	(style, no value)
<code>/zx/wires definition/wire centered start</code>	(style, no value)
<code>/zx/wires definition/wcs</code>	(style, no value)
<code>/zx/wires definition/wire centered end</code>	(style, no value)
<code>/zx/wires definition/wce</code>	(style, no value)

Forces the wires to start at the center of the node (**wire centered start**, alias **wcs**), to end at the center of the node (**wire centered end**, alias **wce**) or both (**wire centered**, alias **wc**). This may be useful, for instance in the old **I0** mode (see below) when nodes have different sizes (the result looks strange otherwise), or with some wires (like **C**) connected to **\ZxNone+** (if possible, use **\zxNone** (without any embellishment) since it does not suffer from this issue as it is a coordinate).

See also **between none** to also increase looseness when connecting only wires (use **between none only** in **I0** mode).



```
\begin{ZX}
\zxZ{} \ar[I0,o',r] \ar[I0,o.,r] & \zxX{\alpha}\\
\zxZ{} \ar[I0,o',r,wc] \ar[I0,o.,r,wc] & \zxX{\alpha}
\end{ZX}
```


<code>/zx/wires definition/bezier=-andL config</code>	(style, no default)
<code>/zx/wires definition/bezier x=-andL config</code>	(style, no default)
<code>/zx/wires definition/bezier y=-andL config</code>	(style, no default)
<code>/zx/wires definition/bezier 4={x1}{y1}{x2}{y2}</code>	(style, no default)
<code>/zx/wires definition/bezier 4 x={x1}{y1}{x2}{y2}</code>	(style, no default)
<code>/zx/wires definition/bezier 4 y={x1}{y1}{x2}{y2}</code>	(style, no default)

To create a bezier wire. These styles are not really meant to be used for the final user because they are long to type and would not be changed document-wise when the style is changed, but most styles are based on these styles. For the **bezier 4 *** versions, the two first arguments are the relative position of the first anchor (**x** and **y** position), the next two of the second anchor. In the **bezier *** versions, the value of **1-** will be the relative **x** position of the first point, **1L** the relative position of the second, and **2-** and **2L** will be for the second point (the advantage of this is that it is also possible to specify angles using **1a1={angle}{length}...** as explained in the **-andL** style). They are said to be relative in the sense that **{0}{0}** is the coordinate of the first point, and **{1}{1}** the second point. The **bezier x** and **bezier 4 y** are useful when the node are supposed to be horizontally or vertically aligned: the distance are now expressed as a fraction of the horizontal (respectively vertical) distance between the two nodes. Using relative coordinates has the advantage that if the nodes positions are moved, the aspect of the wire does not change (it is just squeezed), while this is not true with **in/out** wires which preserves angles but not shapes.

4.4.3 IO wires, the old styles

<code>/zx/wires definition/I0</code>	(style, no value)
--------------------------------------	-------------------

As explained above, wires were first defined using **in**, **out** and **looseness**, but this turned out to be sometimes hard to use since the shape of the wire was changing depending on the position. For example consider the differences between the older version:




```

\begin{ZX}
  \zxN{} & \zxZ{} \\\
  \zxZ{} \ar[ru,I0,N'] \ar[rd,I0,N.] & \\\
  & \zxZ{} \\\
\end{ZX}

\begin{ZX}
  \zxN{} & \zxZ{} \\\[-3pt]
  \zxZ{} \ar[ru,I0,N'] \ar[rd,I0,N.] & \\\[-3pt]
  & \zxZ{} \\\
\end{ZX}

\begin{ZX}
  \zxN{} & \zxZ{} \\\[-5pt]
  \zxZ{} \ar[ru,I0,N'] \ar[rd,I0,N.] & \\\[-5pt]
  & \zxZ{} \\\
\end{ZX}

```



```

\begin{ZX}
  \zxN{} & \zxZ{} \\\
  \zxZ{} \ar[ru,N'] \ar[rd,N.] & \\\
  & \zxZ{} \\\
\end{ZX}

and the newer:

\begin{ZX}
  \zxN{} & \zxZ{} \\\[-3pt]
  \zxZ{} \ar[ru,N'] \ar[rd,N.] & \\\[-3pt]
  & \zxZ{} \\\
\end{ZX}

\begin{ZX}
  \zxN{} & \zxZ{} \\\[-5pt]
  \zxZ{} \ar[ru,N'] \ar[rd,N.] & \\\[-5pt]
  & \zxZ{} \\\
\end{ZX}

```

Here is another example:

Before ∞ after ∞

```

Before \begin{ZX}
  \zxNone{} \ar[I0,C,d,wc] \ar[rd,I0,s] & [\zxWCol] \zxNone{} \\\[\zxWRow]
  \zxNone{} \ar[ru,I0,s] & \zxNone{}
\end{ZX} after \begin{ZX}
  \zxNone{} \ar[C,d] \ar[rd,s] & [\zxWCol] \zxNone{} \\\[\zxWRow]
  \zxNone{} \ar[ru,s] & \zxNone{}
\end{ZX}

```

This example led to the creation of the **bn** style, in order to try to find appropriate looseness values depending on the case... but it is harder to use and results are less predictable.


The new method also allowed us to use **N** for both **N.** and **N'** styles (however we kept both versions for backward compatibility and in case later we want to make a distinction between nodes going down or up).

However, if you prefer the old style, you can just use them by adding **I0**, in front of the style name (styles are nested inside **I0**). Note however that the customization options are of course different.

We list now the older **I0** styles:

<code>/zx/wires definition/I0/C</code>	(style, no value)
<code>/zx/wires definition/I0/C</code>	(style, no value)
<code>/zx/wires definition/I0/C'</code>	(style, no value)
<code>/zx/wires definition/I0/C-</code>	(style, no value)

I0 mode for the **C** wire (used for Bell-like shapes).

Bell pair \frown and funny graph .

```
Bell pair \zx{\zxNone{} \ar[d,I0,C] \l[\zxWRow]
\zxNone{}}
and funny graph
\begin{ZX}
\zxX{} \ar[d,I0,C] \ar[r,C'] & \zxZ{} \ar[d,I0,C-]\l
\zxZ{} \ar[r,I0,C.] & \zxX{}
\end{ZX}.
```

Note that the I0 version cannot really be used when nodes are not aligned (using `wc` can sometimes help with the alignment):

Normal , and IO

```
Normal \begin{ZX}
\zxX{\alpha} \ar[dr,C]\l
& \zxNone{}
\end{ZX}, and IO \begin{ZX}
\zxX{\alpha} \ar[dr,I0,C]\l
& \zxNone{}
\end{ZX}
```


`/zx/wires definition/I0/o'=angle` (style, default 40)
`/zx/wires definition/I0/o.=angle` (style, default 40)
`/zx/wires definition/I0/o-=angle` (style, default 40)
`/zx/wires definition/I0/-o=angle` (style, default 40)

I0 version of `o`. Curved wire, similar to `C` but with a soften angle (optionally specified via $\langle angle \rangle$, and globally editable with `\zxDefaultLineWidth`). Again, the symbols specify which part of the circle (represented with `o`) must be kept.



```
\begin{ZX}
\zxX{} \ar[d,I0,-o] \ar[d,I0,o-]\l
\zxZ{} \ar[r,I0,o'] \ar[r,I0,o.] & \zxX{}
\end{ZX}.
```

Note that these wires can be combined with `H`, `X` or `Z`, in that case one should use appropriate column and row spacing as explained in their documentation:



```
\begin{ZX}
\zxX{\alpha} \ar[d,I0,-o,H] \ar[d,I0,o-,H]\l[\zxHRow]
\zxZ{\beta} \rar & \zxZ{} \ar[r,I0,o',X] \ar[r,I0,o.,Z] & [\zxSCol] \zxX{}
\end{ZX}.
```


`/zx/wires definition/I0/(=angle` (style, default 30)
`/zx/wires definition/I0/)=angle` (style, default 30)
`/zx/wires definition/I0/('=angle` (style, default 30)
`/zx/wires definition/I0/('=angle` (style, default 30)

I0 version of `(` (so far they are the same, but it may change later, use this version if you want to play with `looseness`). Curved wire, similar to `o` but can be used for diagonal items. The angle is, like in `bend right`, the opening angle from the line which links the two nodes. For the first two commands, the `(` and `)` symbols must be imagined as if the starting point was on top of the parens, and the ending point at the bottom.



```
\begin{ZX}
\zxX{} \ar[rd,I0,(] \ar[rd,I0,),red]\l
& \zxZ{}
\end{ZX}.
```

Then, (\prime = \langle and (\prime = \rangle); this notation is, I think, more intuitive when linking nodes from left to right. (\prime is used when going to top right and (\prime when going to bottom right.




```
\begin{ZX}
\zxN{} & \zxX{}\\
\zxZ{} \ar[ru,I0,(\prime) \ar[I0,rd,(.)] & \\\
& \zxX{}
\end{ZX}
```

When the nodes are too far appart, the default angle of 30 may produce strange results as it will go above (for (\prime) the vertical line. Either choose a shorter angle, or see $\langle\prime$ instead.


/zx/wires definition/I0/s (style, no value)
/zx/wires definition/I0/s'=angle (style, default 30)
/zx/wires definition/I0/s.=angle (style, default 30)
/zx/wires definition/I0/-s'=angle (style, default 30)
/zx/wires definition/I0/-s.=angle (style, default 30)
/zx/wires definition/I0/s'==angle (style, default 30)
/zx/wires definition/I0/s'==angle (style, default 30)

I0 version of \mathbf{s} . \mathbf{s} is used to create a s-like wire, to have nicer soften diagonal lines between nodes. Other versions are soften versions (the input and output angles are not as sharp, and the difference angle can be configured as an argument or globally using $\backslash\mathrm{zxDefaultSoftAngleS}$). Adding \prime or \prime specifies if the wire is going up-right or down-right.



```
\begin{ZX}
\zxX{\alpha} \ar[I0,s,rd] \\\
& \zxZ{\beta} \\\
\zxX{\alpha} \ar[I0,s,rd] \\\
& \zxZ{\beta} \\\
& \zxZ{\alpha} \\\
\zxX{\beta} \ar[I0,s,ru] \\\
& \zxZ{\alpha} \\\
\zxX{\beta} \ar[I0,s',ru] \\\
\end{ZX}
```


- forces the angle on the side of - to be horizontal.



```
\begin{ZX}
\zxX{\alpha} \ar[I0,s.,rd] \\\
& \zxZ{\beta} \\\
\zxX{\alpha} \ar[I0,-s.,rd] \\\
& \zxZ{\beta} \\\
\zxX{\alpha} \ar[I0,s.-,rd] \\\
& \zxZ{\beta} \\\
\end{ZX}
```


/zx/wires definition/I0/ss (style, no value)
/zx/wires definition/I0/ss.=angle (style, default 30)
/zx/wires definition/I0/.ss=angle (style, default 30)
/zx/wires definition/I0/sIs.=angle (style, default 30)
/zx/wires definition/I0/.sIs=angle (style, default 30)
/zx/wires definition/I0/ss.I=angle (style, default 30)
/zx/wires definition/I0/I.ss=angle (style, default 30)

IO version of **ss**. **ss** is similar to **s** except that we go from top to bottom instead of from left to right. The position of **.** says if the node is wire is going bottom right (**ss.**) or bottom left (**.ss**).



```
\begin{ZX}
  \zxX{\alpha} \ar[I0,ss,rd] \\\
                                & \zxZ{\beta} \\\
  \zxX{\alpha} \ar[I0,ss.,rd] \\\
                                & \zxZ{\beta} \\\
                                & \zxX{\beta} \ar[I0,.ss,d1] \\\
  \zxZ{\alpha} \\\
                                & \zxX{\beta} \ar[I0,.ss,d1] \\\
  \zxZ{\alpha} \\\
\end{ZX}
```


I forces the angle above (if in between the two **s**) or below (if on the same side as **.**) to be vertical.




```
\begin{ZX}
  \zxX{\alpha} \ar[I0,ss,rd] \\\
                                & \zxZ{\beta} \\\
  \zxX{\alpha} \ar[I0,sIs.,rd] \\\
                                & \zxZ{\beta} \\\
  \zxX{\alpha} \ar[I0,ss,I,rd] \\\
                                & \zxZ{\beta} \\\
                                & \zxX{\beta} \ar[I0,.sIs,d1] \\\
  \zxZ{\alpha} \\\
                                & \zxX{\beta} \ar[I0,I.ss,d1] \\\
  \zxZ{\alpha} \\\
\end{ZX}
```

/zx/wires definition/I0/<'=angle (style, default 60)
 /zx/wires definition/I0/<.=angle (style, default 60)
 /zx/wires definition/I0/'>=angle (style, default 60)
 /zx/wires definition/I0/.>=angle (style, default 60)
 /zx/wires definition/I0/'v=angle (style, default 60)
 /zx/wires definition/I0/v'=angle (style, default 60)

These keys are a bit like (' or (. but the arrival angle is vertical (or horizontal for the ^ (up-down) and v (down-up) versions). As before, the position of the decorator ., ' denote the direction of the wire.



```
\begin{ZX}
  \zxN{} \ar[I0,ru,<'] & \zxZ{} \\\
  \zxX{} \ar[I0,ru,<'] \ar[I0,rd,<.] \\\
  \zxN{} \ar[I0,ru,<'] & \zxZ{} \\\
\end{ZX}
```




```
\begin{ZX}
  \zxN{} & \zxFracX{\pi}{2} \ar[I0,d1,.\^] \ar[I0,dr,.\^] & \\\
  \zxZ{} & & \zxX{}
\end{ZX}
```



```
\begin{ZX}
  \zxZ{} & & \zxX{}\\
  \zxN{} & \zxX{} \ar[I0,ul,.'v] \ar[I0,ur,v'] &
\end{ZX}
```


`/zx/wires definition/I0/N'=angle` (style, default 60)
`/zx/wires definition/I0/N.=angle` (style, default 60)
`/zx/wires definition/I0/-N'=angle` (style, default 60)
`/zx/wires definition/I0/-N.=angle` (style, default 60)
`/zx/wires definition/I0/N'=-angle` (style, default 60)
`/zx/wires definition/I0/N.-=angle` (style, default 60)

I0 version of N. N is used to create a wire leaving at wide angle and arriving at wide angle. Adding ' or . specifies if the wire is going up-right or down-right.



```
\begin{ZX}
  \zxX{\alpha} \ar[I0,N.,rd] \\\
  & & \zxZ{\beta} \\\
  & & \zxZ{\alpha} \\\
  \zxX{\beta} \ar[I0,N',ru] \\\
\end{ZX}
```

- forces the angle on the side of - to be horizontal.



```
\begin{ZX}
  \zxX{\alpha} \ar[I0,-N.,rd] \\\
  & & \zxZ{\beta} \\\
  & & \zxZ{\alpha} \\\
  \zxX{\beta} \ar[I0,N'-,ru] \\\
\end{ZX}
```

`/zx/wires definition/ls=looseness` (style, no default)

Shortcut for `looseness`, allows to quickly redefine looseness. Use with care (or redefine style directly), and *do not use on styles that are not in I0*, since they don't use the in/out mechanism (only (-like styles use in/out... for now. In case you want to change looseness of (, prefer to use I0,(as it is guaranteed to be backward compatible). We may try later to give a key `looseness` for these styles, but it's not the case for now. For I0 styles, you can also change yourself other values, like in, out...



```
\begin{ZX}
  \zxZ{} \ar[rd,s] \\\
  & & \zxX{} \\\
  \zxZ{} \ar[rd,I0,s] \\\
  & & \zxX{} \\\
  \zxZ{} \ar[rd,I0,s,ls=3] \\\
  & & \zxX{}
\end{ZX}
```


`/zx/wires definition/between none` (style, no value)
`/zx/wires definition/bn` (style, no value)

When drawing only IO wires (normal wires would suffer from this parameter), the default looseness may not be good looking and holes may appear in the line. This style (whose alias is `bn`) should therefore be used when curved wires *from the IO path* are connected together. In that case, also make sure to separate columns using `&[\zxWCol]` and rows using `\\[\zxWRow]`.

A swapped Bell pair is 

```
A swapped Bell pair is %
\begin{ZX}
  \zxNone{} \ar[I0,C,d,wc] \ar[rd,I0,s,bn] &[\zxWCol] \zxNone{} \\[\zxWRow]
  \zxNone{} \ar[ru,I0,s,bn] & \zxNone{}
\end{ZX}
```

4.5 Externalize

Since 2022/02/08, it is possible to use the `tikz external` library to save compilation time. To load it, you need to add the following `tikz` libraries:

```
\usetikzlibrary{external}
\usetikzlibrary{zx-calculus}
\tikzexternalize
\zxConfigureExternalSystemCallAuto
```

Then, compile with `shell-escape`, for instance using `pdflatex -shell-escape yourfile.tex`.

WARNING: if `external` is loaded before `zx-calculus`, you don't need to run `\zxConfigureExternalSystemCallAuto`. This command is only useful to ensure the system call used by `external` displays errors appropriately by configuring the interaction mode to match the one used by the parent compilation command. If you prefer to disable this feature to use `external`'s default, define “ before loading the `zx-calculus` library.



Note however that this has not yet being extensively tested, and the `external` library has a few caveats presented below

- If you change the order of the diagrams, or add a diagram in the middle of the document, all subsequent diagrams will be recompiled. This issue has been reported here⁷ and is caused by the fact that the figures are called `figure0, ..., figureN`. To limit this issue, you can regularly insert `\tikzsetfigurename{nameprefix}` in your document with different names to avoid a full recompilation of the file (or using groups to change it for a single newly added equation).
- The `external` library uses the main file to recompile each picture, so if your file is large or loads a lot of libraries, it may take a while to compile a single diagram⁸ (to give an example, this library takes 41 seconds to compile without the `externalize` library, with the `externalize` library it takes 14mn for the first run and 3 seconds for the next runs). For this reason, you may want to use `\tikzset{external/export=false}` in a group to disable temporarily the `external` library while you are writing your diagram.
- If you compile once a diagram without any error, and recompile it after inserting an error, you will see an error while compiling. But if you recompile again, the error will disappear and the diagram that lastly succeeded to build will be inserted instead of the newly buggy diagram. This has been reported here⁹.

⁷<https://github.com/pgf-tikz/pgf/issues/758>

⁸<https://tex.stackexchange.com/questions/633175/tikz-externalize-is-much-slower-than-tikz-on-first-run>

⁹<https://github.com/pgf-tikz/pgf/issues/1137>

- The library `external` forces us to wrap our diagrams into a basically empty tikz-pictures to make it work. The current library will automatically wrap the diagrams when the `external` library is enabled, but you can customize how diagrams are wrapped manually: `\zxExternalAuto` (default) will wrap it automatically if `external` is enabled, `\zxExternalWrap` will always wrap it, `\zxExternalNoWrap` will never wrap it (you will get errors if you use `external`) and `\zxExternalNoWrapNoExt` will not wrap the figure, but will disable temporarily the externalization for diagrams to avoid errors.
- Sometimes, it seems that `external` cuts some parts of the picture, I guess when parts are drawn outside of the bounding box. I've not experienced that with the `zx-library` directly, but the example below with the `double copy shadow` has such issues, where a part of the shadow is cut (I guess the shadow is drawn outside of the bounding box).
- I experienced issues when using `external` with subfiles and biblatex. I will need to investigate it further at some points. Also, it seems that sometimes the inner sep of some labels in `external` mode defaults to zero (see the CNOT example below), I'm not sure why. Adding explicitly the value of the label fixes this.

5 Advanced styling

5.1 Overlaying or creating styles

It is possible to arbitrarily customize the styling, create or update ZX or tikz styles... First, any option that can be given to a `tikz-cd` matrix can also be given to a `ZX` environment (we refer to the manual of `tikz-cd` for more details). We also provide overlays to quickly modify the `ZX` style.

`/zx/default style nodes` (style, no value)

This is where the default style must be loaded. By default, it simply loads the (nested) style packed with this library, `/zx/styles/rounded style`. You can change the style here if you would like to globally change a style.

Note that a style must typically define at least `zxZ4`, `zxX4`, `zxFracZ6`, `zxFracX6`, `\zxH`, `zxHSmall`, `zxNoPhaseSmallZ`, `zxNoPhaseSmallX`, `zxNone{,+,-,I}`, `zxNoneDouble{,+,-,I}` and all the `phase in label*`, `pil*` styles (see code on how to define them). Because the above styles (notably `zxZ*` and `zxFrac*`) are slightly complex to define (this is needed in order to implement `phase in label`, - versions...), it may be quite long to implement them all properly by yourself.

For that reason, it may be easier to load our default style and overlay only some of the styles we use (see example in `/zx/user overlay nodes` right after). You can check our code in `/zx/styles/rounded style` to see what you can redefine (intuitively, the styles like `my style name` should be callable by the end user, `myStyleName` may be redefined by users or used in tikzit, and `my@style@name` are styles that should not be touched by the user). The styles that have most interests are `zxNoPhase` (for Z and X nodes without any phase inside), `zxShort` (for Z and X nodes for fractions typically), `zxLong` (for other Z and X nodes) and `stylePhaseInLabel` (for labels when using `phase in label`). These basic styles are extended to add colors (just add Z/X after the name) like `zxNoPhaseZ...`. You can change them, but if you just want to change the color, prefer to redefine `colorZxZ/colorZxX` instead (note that this color does not change `stylePhaseInLabelZ/X`, so you are free to redefine these styles as well). All the above styles can however be called from inside a tikzit style, if you want to use tikzit internally (make sure to load this library then in `*.tikzdefs`).

Note however that you should avoid to call these styles from inside `\zx{...}` since `\zx*` and `\zxFrac*` are supposed to choose automatically the good style for you depending on the mode (fractions, labels in phase...). For more details, we encourage the advanced users too look at the code of the library, and examples for simple changes will be presented now.


`/zx/user overlay nodes` (style, no value)

If a user just wants to overlay some parts of the node styles, add your changes here.



```
{\tikzset{
  /zx/user overlay nodes/.style={
    zxH/.append style={dashed,inner sep=2mm}
  }
  \zx{\zxNone{} \rar & \zxH{} \rar & \zxNone{}}
}
```

You can also change it on a per-diagram basis:




```
\zx[text=yellow,/zx/user overlay nodes/.style={
  zxSpiders/.append style={thick,draw=purple}}
]{\zxX{} \rar & \zxX{\alpha} \rar & \zxFracZ-{\pi}{2}}
```

The list of keys that can be changed will be given below in `/zx/styles/rounded style/*`.

`/zx/user overlay` (style, no value)

This key will be loaded like it if were inside the options of the picture `\zx[options]{...}`. To avoid always typing `\zx[content vertically centered]{...}`, you can therefore use:



```
\tikzset{
  /zx/user overlay/.style={
    content vertically centered,
  },
}
\begin{ZX}
  \zxX{\alpha} & \zxX{\beta} & \zxX{a} & \zxX{b} & \zxX*{a\pi} & \zxX*{b\pi} & \zxX*{b'\pi} & \zxX*{b\pi} & \zxZ{
\end{ZX}
```

`/zx/default style wires` (style, no value)

Default style for wires. Note that `/zx/wires definition/` is always loaded by default, and we don't add any other style for wires by default. But additional styles may use this functionality.

`/zx/user overlay wires` (style, no value)

The user can add here additional styles for wires.



```
\begin{ZX}[/zx/user overlay wires/.style={thick,->,C/.append
style={dashed}}]
  \zxNone{} \ar[d,C] \rar[] & [\zxWCol] \zxNone{}\backslash[\zxWRow]
  \zxNone{} \rar[] & \zxNone{}
\end{ZX}
```

`/zx/styles/rounded style` (style, no value)

This is the style loaded by default. It contains internally other (nested) styles that must be defined for any custom style.

We present now all the properties that a new node style must have (and that can be overlaid as explained above).

`/zx/styles/rounded style/zxAllNodes` (style, no value)

Style applied to all nodes.

`/zx/styles/rounded style/zxEmptyDiagram` (style, no value)

Style to draw an empty diagram.

`/zx/styles/rounded style/zxNone` (style, no value)

`/zx/styles/rounded style/zxNone+` (style, no value)

`/zx/styles/rounded style/zxNone-` (style, no value)

`/zx/styles/rounded style/zxNoneI` (style, no value)

Styles for None wires (no inner sep, useful to connect to wires). The -,I,+ have additional horizontal, vertical, both spaces.

`/zx/styles/rounded style/zxNoneDouble` (style, no value)

`/zx/styles/rounded style/zxNoneDouble+` (style, no value)

`/zx/styles/rounded style/zxNoneDouble-` (style, no value)

`/zx/styles/rounded style/zxNoneDoubleI` (style, no value)

Like `zxNone`, but with more space to fake two nodes on a single line (not very used).

`/zx/styles/rounded style/zxSpiders` (style, no value)

Style that apply to all circle spiders.

`/zx/styles/rounded style/zxNoPhase` (style, no value)

Style that apply to spiders without any angle inside. Used by `\zxX{}` when the argument is empty.

`/zx/styles/rounded style/zxNoPhaseSmall` (style, no value)

Like `zxNoPhase` but for spiders drawn in between wires.

`/zx/styles/rounded style/zxShort` (style, no value)

Spider with text but no inner space. Used notably to obtain nice fractions.

`/zx/styles/rounded style/zxLong` (style, no value)

Spider with potentially large text. Used by `\zxX{\alpha}` when the argument is not empty.

`/zx/styles/rounded style/zxNoPhaseZ` (style, no value)

`/zx/styles/rounded style/zxNoPhaseX` (style, no value)

`/zx/styles/rounded style/zxNoPhaseSmallZ` (style, no value)

`/zx/styles/rounded style/zxNoPhaseSmallX` (style, no value)

`/zx/styles/rounded style/zxShortZ` (style, no value)

`/zx/styles/rounded style/zxShortX` (style, no value)

`/zx/styles/rounded style/zxLongZ` (style, no value)

`/zx/styles/rounded style/zxLongX` (style, no value)

Like above styles, but with colors of X and Z spider added. The color can be changed globally by updating the `colorZxX` color. By default we use:

```
\definecolor{colorZxZ}{RGB}{204,255,204}
\definecolor{colorZxX}{RGB}{255,136,136}
\definecolor{colorZxH}{RGB}{255,255,0}
```

as the second recommendation in zxcalculus.com/accessibility.html.

`/zx/styles/rounded style/zxH` (style, no value)

Style for Hadamard spiders, used by `\zxH{}` and uses the color `colorZxH`.

`/zx/styles/rounded style/zxHSmall` (style, no value)

Like `zxH` but for Hadamard on wires, (see `H` style).

`\zxConvertToFracInContent`{ $\langle sign \rangle$ }{ $\langle num no parens \rangle$ }{ $\langle denom no parens \rangle$ }{ $\langle nom parens \rangle$ }{ $\langle denom parens \rangle$ }

`\zxConvertToFracInLabel`

These functions are not meant to be used, but redefined using something like (we use `\zxMinus` as a shorter minus compared to `-`):

```
\RenewExpandableDocumentCommand{\zxConvertToFracInLabel}{mmmmm}{%
  \ifthenelse{\equal{#1}{-}}{\zxMinus}{#1}\frac{#2}{#3}%
}
```

This is used to change how the library does the conversion between `\zxFrac` and the actual written text (either in the node content or in the label depending on the function). The first argument is the sign (string `-` for minus, anything else must be written in place of the minus), the second and third argument are the numerator and denominator of the fraction when used in `\frac{}{}{}` while the last two arguments are the same except that they include the parens which should be added when using an inline version. For instance, one could get a call `\zxConvertToFracInLabel{-}{a+b}{c+d}{(a+b)}{(c+d)}`. See part on labels to see an example of use.

```
\zxMinusUnchanged
\zxMinus
\zxMinusInShort
/zx/defaultEnv/zx column sep=length (style, no default)
/zx/styles/rounded style preload/small minus (style, no value)
/zx/styles/rounded style preload/big minus (style, no value)
/zx/styles/rounded style/small minus (style, no value)
/zx/styles/rounded style/big minus (style, no value)
```

`\zxMinus` is the minus sign used in fractions, `\zxMinusInShort` is used in `\zxZ-{\alpha}` and `\zxMinusUnchanged` is a minus sign shorter than `-`. You can redefine them, for instance:

Compare $\ominus\alpha$ and $\ominus\alpha$

```
\def\zxMinusInShort{-}
\zx{\zxZ-{\alpha}}
} and
{\def\zxMinusInShort{\zxMinus}
\zx{\zxZ-{\alpha}}
}
```

You can also choose to always use a big or a small minus, either on a per-node, per-figure, or document-wise.

$\ominus\frac{\pi}{4}$ $\ominus\alpha$ $\ominus\delta_i$ $\ominus\delta_i$ Picture-wise $\ominus\alpha$ $\ominus\delta_i$ $\ominus\delta_i$ $\ominus\frac{\pi}{4}$ Document-wise $\ominus\alpha$ $\ominus\delta_i$ $\ominus\delta_i$ $\ominus\frac{\pi}{4}$


```
\begin{ZX}
\zxFracZ-{\pi}{4} & \zxZ-{\alpha} & \zxZ-{\delta_i} & \zxZ[small minus]-{\delta_i}
\end{ZX} Picture-wise %
\begin{ZX}[small minus]
\zxZ-{\alpha} & \zxZ-{\delta_i} & \zxZ-{\delta_i} & \zxFracZ-{\pi}{4}
\end{ZX} Document-wise %
\tikzset{/zx/user overlay/.style={small minus}}%
\begin{ZX}
\zxZ-{\alpha} & \zxZ-{\delta_i} & \zxZ[big minus]-{\delta_i} & \zxFracZ[big minus]-{\pi}{4}
\end{ZX}
```

We also define several spacing commands that can be redefined to your needs:

```
\zxHCol
\zxHRow
\zxHColFlat
\zxHRowFlat
\zxSCol
\zxSRow
\zxSColFlat
\zxSRowFlat
\zxHSCol
\zxHSRow
\zxHSColFlat
\zxHSRowFlat
\zxWCol
\zxWRow
```

```
\zxcCol
\zxcRow
\zxDotsCol
\zxDotsRow
\zxZeroCol
\zxZeroRow
\zxNCol
\zxNRow
```

These are spaces, to use like `&[\zxHCol]` or `\\[\zxHRow]` in order to increase the default spacing of rows and columns depending on the style of the wire. `H` stands for Hadamard, `S` for Spiders, `W` for Wires only, `w` is you link a `zxNone` to a spider (goal is to increase the space), `N` is when you have a `\zxN` and want to reduce the space between columns, `HS` for both Spiders and Hadamard, `Dots` for the 3 dots styles, `Zero` completely resets the default column sep. And of course `Col` for columns, `Row` for rows.

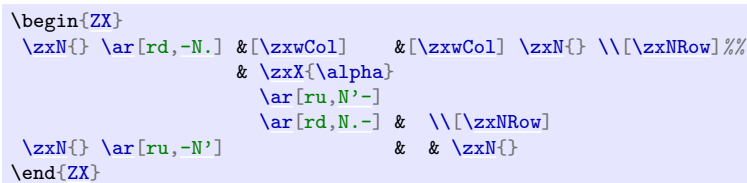

Note that you can add multiple of them by separating with commas (see `\pgfmatrixnextcell`'s documentation for more details). For instance to have a column separation of exactly `2mm`, do `&[\zxZeroCol,2mm]` (if you just do `&[2mm]` the column will be `2mm` larger).

```

\zxDefaultColumnSep
\zxDefaultRowSep
/zx/defaultEnv/zx column sep=length (style, no default)
/zx/defaultEnv/zx row sep=length (style, no default)

```

`\zxDefaultColumn/RowSep` are the column and row space, and the corresponding styles are to change a single matrix. Prefer to change these parameters compared to changing the `row sep` and `column sep` (without `zx`) of the matrix directly since other spacing styles like `\zxZeroCol` or `\zxNCol` depend on `\zxDefaultColumn`.

`\zxDefaultSoftAngleS`
`\zxDefaultSoftAngleO`
`\zxDefaultSoftAngleChevron`

Default opening angles of S, o and v/< wires. Defaults to respectively 30, 40 and 45.

5.2 Wire customization

/zx/args/-andL/	(style, no value)
/zx/args/-andL/default0 (default --=.2,L=.4)	(style, no value)
/zx/args/-andL/defaultN (default --=.2,L=.8)	(style, no value)
/zx/args/-andL/defaultN- (default 1--=.4,1L=0)	(style, no value)
/zx/args/-andL/defaultNN (default)	(style, no value)
/zx/args/-andL/defaultNIN (default 1--=0,1L=.6)	(style, no value)
/zx/args/-andL/defaultS (default --=.8,L=0)	(style, no value)
/zx/args/-andL/defaultS' (default --=.8,L=.2)	(style, no value)
/zx/args/-andL/default-S (default 1--=.8,1L=0)	(style, no value)
/zx/args/-andL/defaultSIS (default 1--=0,1L=.8)	(style, no value)

Default values used by wires (). You can customize them globally using something like:

```
\tikzset{
  /zx/args/-andL/.cd,
  default0/.style={-=.2,L=.4}
```

}

Basically `default0` will configure all the `o` family, `defaultS'` will configure all the “soft” versions of `s`, `default-S` will configure the anchor on the side of the vertical arrival... For more details or which wire uses which configuration, check the default value given in each style definition.


5.3 Wires starting inside or on the boundary of the node

This library provides multiple methods to draw the wires between the nodes (for all curves depending on `bezier`, which is basically everything but `C` and straight lines).

Default drawing method. By default the lines will be drawn behind the node and the starting and ending points will be defined to be a `fake center * anchor` (if it exists, the exact chosen anchors (north, south...) depending on the direction). Because this anchor lies behind the node, we put them on the `edgelay` layer. For debugging purpose, it can be practical to display them:

```
\zxEdgesAbove
/zx/wires definition/edge above (style, no value)
/zx/wires definition/edge not above (style, no value)
```

If the macro `\zxEdgesAbove` is undefined (using `\let\xzEdgesAbove\undefined`) edges will be drawn above the nodes. To change it on a per-edge basis, use `edge above` (or its contrary `edge not above`) *before the name of the wire*. This is mostly useful to understand how lines are drawn and for debugging purpose.




```
What you see:
\xz{\zxZ{\alpha+\beta}} \ar[dr,s] \\\
& \zxZ{\alpha+\beta}}

What is drawn:
\xz{\zxZ{\alpha+\beta}} \ar[dr,edge above,s] \\\
& \zxZ{\alpha+\beta}}
```

(you can note the fact that the wire does not start at the center but at a `fake center *` anchor to provide a nicer look)

```
\zxControlPointsVisible
/zx/wires definition/control points visible (style, no value)
/zx/wires definition/control points not visible (style, no value)
```

Similarly, it can be useful for debugging to see the control points of the curves (note that `C`, straight lines and `()` wires are not based on our curve system, so it won't do anything for them). If the macro `\zxControlPointsVisible` is defined (using `\def\xzEdgesAbove{}`) control points will be drawn. To change it on a per-edge basis, use `control points visible` (or its contrary `control points not visible`). This is mostly useful to understand how lines are drawn and for debugging purpose.




```
Controls not visible:
\xz{\zxZ{\alpha+\beta}} \ar[dr,s] \\\
& \zxZ{\alpha+\beta}}

Control visible:
\xz{\zxZ{\alpha+\beta}} \ar[dr,control points visible,s] \\\
& \zxZ{\alpha+\beta}}

Control visible + edge above:
\xz{\zxZ{\alpha+\beta}} \ar[dr,edge above,control points visible,s] \\\
& \zxZ{\alpha+\beta}}
```



WARNING: this command adds some points in the wire path, and in particular if you have a H wire (Hadamard in the middle of the wire), this option will not place it correctly. But it's not really a problem since it's just to do a quick debugging.

Unfortunately, the default drawing method also has drawbacks. For instance, when using the H edge between a spider and an empty node, the “middle” of the edge will appear too close to the center by default (we draw the first edge above to illustrate the reason of this visual artifact):




```
\begin{ZX}
\zxN{} \ar[rd,edge above,-N.,H] & [\zxwCol,\zxHCol] & [\zxwCol,\zxHCol] \zxN{} \\\[ \zxNRow] %%
& \zxX{\alpha}
& \ar[ru,N'-,H]
& \ar[rd,N.-,H] & \\\[ \zxNRow]
\zxN{} \ar[ru,-N',H] & & \zxN{}
\end{ZX}
```

To solve that issue, you need to manually position the H node as shown before:




```
\begin{ZX}
\zxN{} \ar[rd,edge above,-N.,H={pos=.35}] & [\zxwCol,\zxHCol] & [\zxwCol,\zxHCol] \zxN{} \\\[ \zxNRow] %%
& \zxX{\alpha}
& \ar[ru,N'-,H={pos=1-.35}]
& \ar[rd,N.-,H={pos=1-.35}] & \\\[ \zxNRow]
\zxN{} \ar[ru,-N',H={pos=.35}] & & \zxN{}
\end{ZX}
```

Or manually position the anchor outside the node (you can use angles, centered on the real center on the shape), but be aware that it can change the shape of the node (see below):



```
\begin{ZX}
\zxN{} \ar[rd,edge above,-N.,H,end anchor=180-45] & [\zxwCol,\zxHCol] & [\zxwCol,\zxHCol] \zxN{} \\\[ \zxNRow] %%
& \zxX{\alpha}
& \ar[ru,N'-,H,start anchor=45]
& \ar[rd,N.-,H,start anchor=-45] & \\\[ \zxNRow]
\zxN{} \ar[ru,-N',H,end anchor=180+45] & & \zxN{}
\end{ZX}
```


A second drawback is that it is not possible to add arrows on the curved wires (except \mathbb{C} which uses a different approach), since they will be hidden behind the node:



```
What you see:
\zx{\zxZ{\alpha+\beta}} \ar[dr,s,<->] \\\
& \zxZ{\alpha+\beta}}

What is drawn:
\zx{\zxZ{\alpha+\beta}} \ar[dr,edge above,s,<->] \\\
& \zxZ{\alpha+\beta}}
```

Here, the only solution (without changing the drawing mode) is to manually position the anchor as before. . . but note that on nodes with a large content 45 degrees is actually nearly on the top since the angle is not taken from a fake center but from the real center of the node.




```
\zx{\zxZ{\alpha+\beta}} \ar[dr,s,<->,start anchor=-45,end
anchor=180-45] \\\
& \zxZ{\alpha+\beta}}
\zx{\zxZ{\alpha+\beta}} \ar[dr,s,<->,start anchor=-15,end
anchor=180-15] \\\
& \zxZ{\alpha+\beta}}
```

Note that the shape of the wire may be a bit different since the ending and leaving parts was hidden before, and the current styles are not designed to look nicely when starting on the border of a node. For that reason, you may need to tweak the style of the wire yourself using `-`, `L` options.

The “intersection” drawing methods We also define other modes to draw wires (they are very new and not yet tested a lot). In the first mode, appropriate `fake center *` is taken, then depending on the bezier control points, a point is taken on the border of the shape (starting from the fake center and using the direction of the bezier control point). Then the node is drawn. Here is how to enable this mode:


```
\zxEnableIntersections{\>}
\zxDisableIntersections{\>}
\zxEnableIntersectionsNodes
\zxEnableIntersectionsWires
/zx/wires definition/use intersections (style, no value)
/zx/wires definition/dont use intersections (style, no value)
```

The simpler method to enable or disable intersections is to call `\zxEnableIntersections{}` or `\zxDisableIntersections{}` (potentially in a group to have a local action only). Note that *this does not automatically adapt the styles*, see `ui` to adapt the styles automatically.



```
{% Enable intersections (but does not load our custom "intersections" style, see ui).
\zxEnableIntersections{}% Small space left = artifact of the documentation
\begin{ZX}
\zxN{} \ar[rd,edge above,-N',H] & [\zxwCol,\zxHCol] & [\zxwCol,\zxHCol] \zxN{} \\\[\zxNRow]%%
& \zxX{\alpha}
& \ar[ru,N'-,H]
& \ar[rd,N.-,H] & \\\[\zxNRow]
\zxN{} \ar[ru,-N',H] & & & \zxN{}
\end{ZX}
}
```

(The `edge above` is just to show that the wire does not go inside.) However, this method enable intersections for the whole drawing. You can disable it for a single arrow using the `dont use intersections` style. But it is possible instead to enable it for a single wire. To do that, first define `\def\zxEnableIntersectionsNodes{}` (it will automatically add a `name path` on each node. If you don’t care about optimizations, you can just define it once at the beginning of your project), and then use `use intersections` on the wires which should use intersections:







```
{% Create the machinery needed to compute intersections, but does not enable it.
\def\zxEnableIntersectionsNodes{}% Small space left = artifact of the documentation
\begin{ZX}
  \zxN{} \ar[rd,edge above,-N',H, %% "use intersections" does not load any style, cf ui.
        use intersections] & [\zxwCol,\zxHCol] & [\zxwCol,\zxHCol] \zxN{} \\\[\zxNRow]%%
                                     & \zxX{\alpha}
                                     \ar[ru,edge above,N'-,H,use intersections]
                                     \ar[rd,edge above,N.-,H] & \\\[\zxNRow]
  \zxN{} \ar[ru,edge above,-N',H] & & & \zxN{}
\end{ZX}
}
```

`/zx/wires definition/ui`

(style, no value)

This method has however a few drawbacks. One of the first reason that explains why we don't use it by default is that it is quite long to compute (it involves the `intersections` library to obtain the bezier point to start at and my code may also be not very well optimized as I'm a beginner with \LaTeX and `TikZ` programming... and what a strange language!). Secondly, it has not yet been tested a lot. Note also that the default wire styles have not been optimized for this setup and the results may vary compared to the default drawing mode (sometimes they are "better", sometimes they are not). We have however tried to define a second style `/zx/args/-andL/ui/` that have nicer results. To load it, just type `ui` before the wire style name, it will automatically load `use intersections` together with our custom styles (see below how to use `user overlay wires` to load it by default):

Before  after  corrected manually  or with our custom style .


```
{%
\def\zxEnableIntersectionsNodes{}
Before \begin{ZX}
  \zxX{\beta} \ar[r,o'] & \zxX{}
\end{ZX} after \begin{ZX}
  \zxX{\beta} \ar[r,o',use intersections] & \zxX{}
\end{ZX} corrected manually \begin{ZX}
  \zxX{\beta} \ar[r,edge above, use intersections, o'={-=.2,L=.15}] & \zxX{}
\end{ZX} or with our custom style \begin{ZX}
  \zxX{\beta} \ar[r,edge above, ui, o'] & \zxX{}
\end{ZX}.
}
```

Here are further comparisons:

Before  ui . Before  ui . Before  ui .


```
{%
\def\zxEnableIntersectionsNodes{}
Before \begin{ZX}
  \zxX{} \ar[r,o'] & \zxX{}
\end{ZX} ui \begin{ZX}
  \zxX{} \ar[r, ui, o'] & \zxX{}
\end{ZX}. Before \begin{ZX}
  \zxX{\alpha} \ar[r,o'] & \zxZ{\beta}
\end{ZX} ui \begin{ZX}
  \zxX{\alpha} \ar[r, ui, o'] & \zxZ{\beta}
\end{ZX}. Before \begin{ZX}
  \zxX{\alpha+\beta} \ar[r,o'] & \zxZ{\alpha+\beta}
\end{ZX} ui \begin{ZX}
  \zxX{\alpha+\beta} \ar[r, ui, o'] & \zxZ{\alpha+\beta}
\end{ZX}.
}
```

With N:




```
{%
\def\zxEnableIntersectionsNodes{
\begin{ZX}
\zxX{} \ar[rd,N]\!\! & \zxX{}
\end{ZX} $\Rightarrow$ ui \begin{ZX}
\zxX{} \ar[rd,ui,N]\!\! & \zxX{}
\end{ZX}.
\begin{ZX}
\zxX{\alpha} \ar[rd,N]\!\! & \zxX{}
\end{ZX} $\Rightarrow$ ui \begin{ZX}
\zxX{\alpha} \ar[rd,ui,N]\!\! & \zxX{}
\end{ZX}.
\begin{ZX}
\zxX{\alpha} \ar[rd,N]\!\! & \zxX{\beta}
\end{ZX} $\Rightarrow$ ui \begin{ZX}
\zxX{\alpha} \ar[rd,ui,N]\!\! & \zxX{\beta}
\end{ZX}.
\begin{ZX}
\zxX{\alpha+\beta} \ar[rd,N]\!\! & \zxX{\alpha+\beta}
\end{ZX} $\Rightarrow$ ui \begin{ZX}
\zxX{\alpha+\beta} \ar[rd,ui,N]\!\! & \zxX{\alpha+\beta}
\end{ZX}.
}
```

With N-:



```
{%
\def\zxEnableIntersectionsNodes{
\begin{ZX}
\zxX{} \ar[rd,N-]\!\! & \zxX{}
\end{ZX} $\Rightarrow$ ui \begin{ZX}
\zxX{} \ar[rd,ui,N-]\!\! & \zxX{}
\end{ZX}.
\begin{ZX}
\zxX{\alpha} \ar[rd,N-]\!\! & \zxX{}
\end{ZX} $\Rightarrow$ ui \begin{ZX}
\zxX{\alpha} \ar[rd,ui,N-]\!\! & \zxX{}
\end{ZX}.
\begin{ZX}
\zxX{\alpha} \ar[rd,N-]\!\! & \zxX{\beta}
\end{ZX} $\Rightarrow$ ui \begin{ZX}
\zxX{\alpha} \ar[rd,ui,N-]\!\! & \zxX{\beta}
\end{ZX}.
\begin{ZX}
\zxX{\alpha+\beta} \ar[rd,N-]\!\! & \zxX{\alpha+\beta}
\end{ZX} $\Rightarrow$ ui \begin{ZX}
\zxX{\alpha+\beta} \ar[rd,ui,N-]\!\! & \zxX{\alpha+\beta}
\end{ZX}.
}
```

With <.::




```

{%
\def\zxEnableIntersectionsNodes{
\begin{ZX}
\zxX{} \ar[rd,<.]\\ & \zxX{}
\end{ZX} $\Rightarrow$ ui \begin{ZX}
\zxX{} \ar[rd,ui,<.]\\ & \zxX{}
\end{ZX}.
\begin{ZX}
\zxX{\alpha} \ar[rd,<.]\\ & \zxX{}
\end{ZX} $\Rightarrow$ ui \begin{ZX}
\zxX{\alpha} \ar[rd,ui,<.]\\ & \zxX{}
\end{ZX}.
\begin{ZX}
\zxX{\alpha} \ar[rd,<.]\\ & \zxX{\beta}
\end{ZX} $\Rightarrow$ ui \begin{ZX}
\zxX{\alpha} \ar[rd,ui,<.]\\ & \zxX{\beta}
\end{ZX}.
\begin{ZX}
\zxX{\alpha+\beta} \ar[rd,<.]\\ & \zxX{\alpha+\beta}
\end{ZX} $\Rightarrow$ ui \begin{ZX}
\zxX{\alpha+\beta} \ar[rd,ui,<.]\\ & \zxX{\alpha+\beta}
\end{ZX}.
}

```

With NIN:




```

{%
\def\zxEnableIntersectionsNodes{
\begin{ZX}
\zxX{} \ar[rd,NIN]\\ & \zxX{}
\end{ZX} $\Rightarrow$ ui \begin{ZX}
\zxX{} \ar[rd,ui,NIN]\\ & \zxX{}
\end{ZX}.
\begin{ZX}
\zxX{\alpha} \ar[rd,NIN]\\ & \zxX{}
\end{ZX} $\Rightarrow$ ui \begin{ZX}
\zxX{\alpha} \ar[rd,ui,NIN]\\ & \zxX{}
\end{ZX}.
\begin{ZX}
\zxX{\alpha} \ar[rd,NIN]\\ & \zxX{\beta}
\end{ZX} $\Rightarrow$ ui \begin{ZX}
\zxX{\alpha} \ar[rd,ui,NIN]\\ & \zxX{\beta}
\end{ZX}.
\begin{ZX}
\zxX{\alpha+\beta} \ar[rd,NIN]\\ & \zxX{\alpha+\beta}
\end{ZX} $\Rightarrow$ ui \begin{ZX}
\zxX{\alpha+\beta} \ar[rd,ui,NIN]\\ & \zxX{\alpha+\beta}
\end{ZX}.
}

```

With this mode s behaves basically like S since the only difference is the anchor:




```

{%
\def\zxEnableIntersectionsNodes{
\begin{ZX}
\zxX{} \ar[rd,s]\! & \zxX{}
\end{ZX} $\Rrightarrow$ ui \begin{ZX}
\zxX{} \ar[rd,ui,s]\! & \zxX{}
\end{ZX}.
\begin{ZX}
\zxX{\alpha} \ar[rd,s]\! & \zxX{}
\end{ZX} $\Rrightarrow$ ui \begin{ZX}
\zxX{\alpha} \ar[rd,ui,s]\! & \zxX{}
\end{ZX}.
\begin{ZX}
\zxX{\alpha} \ar[rd,s]\! & \zxX{\beta}
\end{ZX} $\Rrightarrow$ ui \begin{ZX}
\zxX{\alpha} \ar[rd,ui,s]\! & \zxX{\beta}
\end{ZX}.
\begin{ZX}
\zxX{\alpha+\beta} \ar[rd,s]\! & \zxX{\alpha+\beta}
\end{ZX} $\Rrightarrow$ ui \begin{ZX}
\zxX{\alpha+\beta} \ar[rd,ui,s]\! & \zxX{\alpha+\beta}
\end{ZX}.
}

```

With s' :




```

{%
\def\zxEnableIntersectionsNodes{
\begin{ZX}
\zxX{} \ar[rd,s']\! & \zxX{}
\end{ZX} $\Rrightarrow$ ui \begin{ZX}
\zxX{} \ar[rd,ui,s']\! & \zxX{}
\end{ZX}.
\begin{ZX}
\zxX{\alpha} \ar[rd,s']\! & \zxX{}
\end{ZX} $\Rrightarrow$ ui \begin{ZX}
\zxX{\alpha} \ar[rd,ui,s']\! & \zxX{}
\end{ZX}.
\begin{ZX}
\zxX{\alpha} \ar[rd,s']\! & \zxX{\beta}
\end{ZX} $\Rrightarrow$ ui \begin{ZX}
\zxX{\alpha} \ar[rd,ui,s']\! & \zxX{\beta}
\end{ZX}.
\begin{ZX}
\zxX{\alpha} \ar[rd,s']\! & \zxX{\beta}
\end{ZX} $\Rrightarrow$ ui \begin{ZX}
\zxX{\alpha+\beta} \ar[rd,s']\! & \zxX{\alpha+\beta}
\end{ZX}.
\begin{ZX}
\zxX{\alpha+\beta} \ar[rd,s']\! & \zxX{\alpha+\beta}
\end{ZX} $\Rrightarrow$ ui \begin{ZX}
\zxX{\alpha+\beta} \ar[rd,ui,s']\! & \zxX{\alpha+\beta}
\end{ZX}.
}

```

With $-s$:




```

{%
\def\zxEnableIntersectionsNodes{
\begin{ZX}
\zxX{} \ar[rd,-s]\\ & \zxX{}
\end{ZX} $\Rightarrow$ ui \begin{ZX}
\zxX{} \ar[rd,ui,-s]\\ & \zxX{}
\end{ZX}.
\begin{ZX}
\zxX{\alpha} \ar[rd,-s]\\ & \zxX{}
\end{ZX} $\Rightarrow$ ui \begin{ZX}
\zxX{\alpha} \ar[rd,ui,-s]\\ & \zxX{}
\end{ZX}.
\begin{ZX}
\zxX{\alpha} \ar[rd,-s]\\ & \zxX{\beta}
\end{ZX} $\Rightarrow$ ui \begin{ZX}
\zxX{\alpha} \ar[rd,ui,-s]\\ & \zxX{\beta}
\end{ZX}.
\begin{ZX}
\zxX{\alpha+\beta} \ar[rd,-s]\\ & \zxX{\alpha+\beta}
\end{ZX} $\Rightarrow$ ui \begin{ZX}
\zxX{\alpha+\beta} \ar[rd,ui,-s]\\ & \zxX{\alpha+\beta}
\end{ZX}.
}

```

With SIS:




```

{%
\def\zxEnableIntersectionsNodes{
\begin{ZX}
\zxX{} \ar[rd,SIS]\\ & \zxX{}
\end{ZX} $\Rightarrow$ ui \begin{ZX}
\zxX{} \ar[rd,ui,SIS]\\ & \zxX{}
\end{ZX}.
\begin{ZX}
\zxX{\alpha} \ar[rd,SIS]\\ & \zxX{}
\end{ZX} $\Rightarrow$ ui \begin{ZX}
\zxX{\alpha} \ar[rd,ui,SIS]\\ & \zxX{}
\end{ZX}.
\begin{ZX}
\zxX{\alpha} \ar[rd,SIS]\\ & \zxX{\beta}
\end{ZX} $\Rightarrow$ ui \begin{ZX}
\zxX{\alpha} \ar[rd,ui,SIS]\\ & \zxX{\beta}
\end{ZX}.
\begin{ZX}
\zxX{\alpha+\beta} \ar[rd,SIS]\\ & \zxX{\alpha+\beta}
\end{ZX} $\Rightarrow$ ui \begin{ZX}
\zxX{\alpha+\beta} \ar[rd,ui,SIS]\\ & \zxX{\alpha+\beta}
\end{ZX}.
}

```

With \sim :




```

{%
\def\zxEnableIntersectionsNodes{
\begin{ZX}
\zxX{} \ar[rd,^.]\\ & \zxX{}
\end{ZX} $\Rightarrow$ ui \begin{ZX}
\zxX{} \ar[rd,ui,^.]\\ & \zxX{}
\end{ZX}.
\begin{ZX}
\zxX{\alpha} \ar[rd,^.]\\ & \zxX{}
\end{ZX} $\Rightarrow$ ui \begin{ZX}
\zxX{\alpha} \ar[rd,ui,^.]\\ & \zxX{}
\end{ZX}.
\begin{ZX}
\zxX{\alpha} \ar[rd,^.]\\ & \zxX{\beta}
\end{ZX} $\Rightarrow$ ui \begin{ZX}
\zxX{\alpha} \ar[rd,ui,^.]\\ & \zxX{\beta}
\end{ZX}.
\begin{ZX}
\zxX{\alpha+\beta} \ar[rd,^.]\\ & \zxX{\alpha+\beta}
\end{ZX} $\Rightarrow$ ui \begin{ZX}
\zxX{\alpha+\beta} \ar[rd,ui,^.]\\ & \zxX{\alpha+\beta}
\end{ZX}.
}

```

Now using our favorite drawing. Here we illustrate how we apply our custom style to all arrows.




```

\def\zxEnableIntersectionsNodes{}%
\tikzset{
  /zx/user overlay wires/.style={
    ui, % Other method
  }
}
\begin{ZX}[
  execute at begin picture={%
    %% Definition of long items (the goal is to have a small and readable matrix
    % (warning: macro can't have numbers in TeX. Also, make sure not to use existing names)
    \def\Zpifour{\zxFracZ[a=Zpi4]-{\pi}{4}}%
    \def\mypitwo{\zxFracX[a=myspi2]{\pi}{2}}%
  }
  %% Matrix: in emacs "M-x align" is practical to automatically format it. a is for 'alias'
  & \zxN[a=n]{} & \zxZ[a=xmiddle]{} & & \zxN[a=out1]{} \\
  \zxN[a=in1]{} & \Zpifour{} & \zxX[a=Xdown]{} & & \mypitwo{} & \\
  & & & & & \zxN[a=out2]{} \\
  \zxN[a=in2]{} & \zxX[a=X1]{} & \zxZ[a=toprightpi]{\pi} & & & \zxN[a=out3]{}
  %% Arrows
  % Column 1
  \ar[from=in1,to=X1,s]
  \ar[from=in2,to=Zpi4,.>]
  % Column 2
  \ar[from=X1,to=xmiddle,N']
  \ar[from=X1,to=toprightpi,H]
  \ar[from=Zpi4,to=n,C] \ar[from=n,to=xmiddle,wc]
  \ar[from=Zpi4,to=Xdown]
  % Column 3
  \ar[from=xmiddle,to=Xdown,C-]
  \ar[from=xmiddle,to=myspi2,'>]
  % Column 4
  \ar[from=toprightpi,to=myspi2,-N]
  \ar[from=myspi2,to=out1,<']
  \ar[from=myspi2,to=out2,<.]
  \ar[edge above,use intersections,from=Xdown,to=out3,<.]
\end{ZX}

```

The same using control points visible to check if the good styles are applied:





```

\def\zxEnableIntersectionsNodes{}%
\tikzset{
  /zx/user overlay wires/.style={
    ui, % Enable our style on all
    edge above, % For debugging
    control points visible % For debugging
  }
}
\def\zxDebugMode{}
\def\zxControlPointsVisible{}
\begin{ZX}[
  execute at begin picture={%
    %% Definition of long items (the goal is to have a small and readable matrix
    % (warning: macro can't have numbers in TeX. Also, make sure not to use existing names)
    \def\Zpifour{\zxFracZ[a=Zpi4]-{\pi}{4}}%
    \def\mypitwo{\zxFracX[a=myspi2]{\pi}{2}}%
  }
]
%% Matrix: in emacs "M-x align" is practical to automatically format it. a is for 'alias'
& \zxN[a=n]{} & \zxZ[a=xmiddle]{} & & \zxN[a=out1]{} \\\
\zxN[a=in1]{} & \Zpifour{} & \zxX[a=Xdown]{} & & \mypitwo{} & \\\
& & & & \zxN[a=out2]{} & \\\
\zxN[a=in2]{} & \zxX[a=X1]{} & \zxZ[a=toprightpi]{\pi} & & & \zxN[a=out3]{}
%% Arrows
% Column 1
\ar[from=in1,to=X1,s]
\ar[from=in2,to=Zpi4,.>]
% Column 2
\ar[from=X1,to=xmiddle,N']
\ar[from=X1,to=toprightpi,H]
\ar[from=Zpi4,to=n,C] \ar[from=n,to=xmiddle,wc]
\ar[from=Zpi4,to=Xdown]
% Column 3
\ar[from=xmiddle,to=Xdown,C-]
\ar[from=xmiddle,to=myspi2,'>]
% Column 4
\ar[from=toprightpi,to=myspi2,-N]
\ar[from=myspi2,to=out1,<']
\ar[from=myspi2,to=out2,<.]
\ar[edge above,use intersections,from=Xdown,to=out3,<.]
\end{ZX}

```

Now, we can also globally enable the `ui` style and the intersection only for some kinds of arrows. For instance (here we enable it for all styles based on `N`, i.e. `*N*` and `>`-like wires). See that the `s` node is not using the intersections mode:



```

\def\zxEnableIntersectionsNodes{}%
\tikzset{
  /zx/user overlay wires/.style={
    %% Nbase changes both N-like and >-like styles.
    %% Use N/.append to change only N-like.
    Nbase/.append style={%
      ui, % intersection only for arrows based on N (N and <)
    },
    edge above, % For debugging
    control points visible % For debugging
  }
}
\def\zxDebugMode{}
\def\zxControlPointsVisible{}
\begin{ZX}[
  execute at begin picture={%
    %% Definition of long items (the goal is to have a small and readable matrix
    % (warning: macro can't have numbers in TeX. Also, make sure not to use existing names)
    \def\Zpi4four{\zxFracZ[a=Zpi4]{\pi}{4}}%
    \def\mypitwo{\zxFracX[a=ypit2]{\pi}{2}}%
  }
]
%% Matrix: in emacs "M-x align" is practical to automatically format it. a is for 'alias'
& \zxN[a=n]{} & \zxZ[a=xmiddle]{} & & \zxN[a=out1]{} \\\
\zxN[a=in1]{} & \Zpi4four{} & \zxX[a=Xdown]{} & & \mypitwo{} & & \\\
& & & & \zxN[a=out2]{} & & \\\
\zxN[a=in2]{} & \zxX[a=X1]{} & \zxZ[a=toprightpi]{\pi} & & & & \zxN[a=out3]{}
%% Arrows
% Column 1
\ar[from=in1,to=X1,s]
\ar[from=in2,to=Zpi4,.>]
% Column 2
\ar[from=X1,to=xmiddle,N']
\ar[from=X1,to=toprightpi,H]
\ar[from=Zpi4,to=n,C] \ar[from=n,to=xmiddle,wc]
\ar[from=Zpi4,to=Xdown]
% Column 3
\ar[from=xmiddle,to=Xdown,C-]
\ar[from=xmiddle,to=ypit2,'>]
% Column 4
\ar[from=toprightpi,to=ypit2,-N]
\ar[from=ypit2,to=out1,<']
\ar[from=ypit2,to=out2,<.]
\ar[edge above,use intersections,from=Xdown,to=out3,<.]
\end{ZX}


```

\zxIntersectionLineBetweenStartEnd

/zx/wires definition/intersections mode between start end (style, no value)

/zx/wires definition/intersections mode bezier controls (style, no value)

Node that we also defined another intersection mechanism, in which the intersection with the node boundary is computed using the line that links the two fake centers of the starting and ending point. To use it, either define `\def\zxIntersectionLineBetweenStartEnd{}` or use the style `intersections between start end` (or to come back to the normal intersection mode `intersections bezier controls`). Note that this just changes the mode of computing intersections, but does not enable intersections, you still need to enable intersections as explained above (for instance using `use intersection`, or `ui` if you also want to load our style). Note however that we don't spent too much effort in this mode as the result is often not really appealing, in particular the \circ shapes, and therefore we designed no special style for it and made only a few tests.



```

{%
\def\zxEnableIntersectionsNodes{
\begin{ZX}
\zxX{\alpha} \ar[rd,N] \& \zxX{\beta}
\end{ZX} $\Rightarrow$ between start end \begin{ZX}
\zxX{\alpha} \ar[edge above,rd,ui,intersections mode between start end,N] \& \zxX{\beta}
\end{ZX}.
\begin{ZX}
\zxX{\alpha} \ar[r,o'] \ar[r,o.] \& \zxX{\beta}
\end{ZX} $\Rightarrow$ between start end \begin{ZX}
\zxX{\alpha} \ar[r,ui,intersections mode between start end,o.]
\ar[r,ui,intersections mode between start end,o.] \& \zxX{\beta}
\end{ZX}.
}

```

5.4 Nested diagrams

If you consider this example:




```

Alone \begin{ZX}
\zxX{} \rar \ar[r,o'] \ar[r,o.] \& \zxZ{}
\end{ZX} %
in a diagram %
\begin{ZX}[math baseline=myb]
&[\zxwCol] \zxFracX{-\pi}{2} \& \zxX{}
\ar[r,o']
\ar[r,o.] \& \zxZ{} &[\zxwCol] \\\
\zxN[a=myb]{} \rar \& \zxFracZ{\pi}{2} \rar \& \zxFracX{\pi}{2} \rar \& \zxFracZ{\pi}{2} \rar \& \zxN{}
\end{ZX}

```

You can see that the constant looks much wider in the second picture, due to the fact that the nodes below increase the column size. One solution I found for this problem is to use `savebox` to create your drawing *before* the diagram, and then use the `fit` library to include it where you want in the matrix (see below for a command that does that automatically):



```

%% Create a new box
\newsavebox{\myZXbox}
%% Save our small diagram.
%% Warning: on older versions, you needed to use \& instead of &
%% (the char '&' cause troubles in functions), but I fixed it 2022/02/09
\savebox{\myZXbox}{%
\zx{ % you may need
\zxX{} \rar \ar[r,o'] \ar[r,o.] \& \zxZ{}
}%
}

$x = \begin{ZX}[
execute at end picture={
%% Add our initial drawing at the end:
\node[fit=(start)(end),yshift=-axis_height] {\usebox{\myZXbox}};
},
math baseline=myb]
&[\zxwCol] \zxFracX{-\pi}{2} \& \zxN[a=start]{} \& \zxN[a=end] \\\
\zxN[a=myb]{} \rar \& \zxFracZ{\pi}{2} \rar \& \zxFracX{\pi}{2} \rar \& \zxFracZ{\pi}{2} \rar \& \zxN{}
\end{ZX}$


```

Note that this has the advantage of preserving the baseline of the big drawing. However, it is

a bit cumbersome to use, so we provide here a wrapper that automatically does the following code (this has not been tested extensively, and may be subject to changes):

```
\zxSaveDiagram{<name with backslash>}[<zx options>]{<diagram with ampersand \&>}
/zx/wires definition/use diagram={<name with \>}{<(nodes)(to)(fit)>}} (style, no default)
```


Use `\zxSaveDiagram` to save and name a diagram (must be done before the diagram you want to insert this diagram into, also **do not forget the backslash before the name** (note that before 2022/09/02, you needed to use `\&` instead of `&`, but this has been fixed after 2022/02/09. In case you really care about backward compatibility, either download the sty file in your folder, or add `ampersand replacement=\&` in the options of the `\zxSaveDiagram` function and use `\&` as before). Then, use `diagram` to insert it inside a diagram (the second argument is a list of nodes given to the `fit` library):



```
%% v---- note the backslash
\zxSaveDiagram{\myZXconstant}{\zxX{} \rar \ar[r,o'] \ar[r,o.] & \zxZ{}}
$x = \begin{ZX}[use diagram={\myZXconstant}{(start)(end)}, math baseline=myb]
&[\zxwCol] \zxFracX{-\pi}{2} & \zxN[a=start]{} & \zxN[a=end]{} \\
\zxN[a=myb]{} \rar & \zxFracZ{\pi}{2} \rar & \zxFracX{\pi}{2} \rar & \zxFracZ{\pi}{2} \rar & \zxN{} \\
\end{ZX}$
```

Note that if you need more space to insert the drawing, you can use `\zxN+[a=start,minimum width=2cm]{} instead of \zxN.`

Sometimes, you may also find useful to stack diagram (for instance because the matrix of the first diagram is not related to the matrix of the second diagram), or position multiple diagrams relative to each others. You can use arrays to do that, but it will not preserve the baseline. Another solution is to put the ZX environment inside nodes contained in `tikzpicture` (I know that `tikz` does not like nesting... but it works nice for what I tried. I will also try to provide an helper function to do that later). For example here we use it to add the constants below the second diagram:

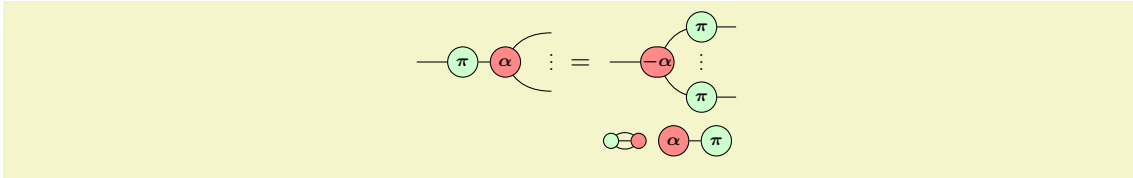


```

\begin{equation*}
\begin{ZX}
&[\zxwCol] & & &[\zxwCol] \ \zxN{} \ \ar[dd,3 \vdots] \ \backslash[\zxNCol]
\\ \zxN{} \ \rar & \zxZ{\pi} \ \rar & \zxX{\alpha} \ \ar[ru,N'-] \ \ar[rd,N.-] & & \backslash[\zxNCol]
& & & & \zxN{}
\end{ZX} =
\begin{tikzpicture}[
baseline=(A.base)
]
\node[inner sep=0pt] (A){%
\begin{ZX}
&[\zxwCol] & & \zxZ{\pi} \ \ar[dd,3 \vdots] \ \rar &[\zxwCol] \ \zxN{} \ \backslash[\zxNCol]
\\ \zxN{} \ \rar & \zxX{-\alpha} \ \ar[ru,N'-] \ \ar[rd,N.-] & & & \backslash[\zxNCol]
& & & \zxZ{\pi} \ \rar & \zxN{}
\end{ZX}
};
\node[inner sep=0pt,below=\zxDefaultColumnSep of A] (B){
\begin{ZX}
\zxOneOverSqrtTwo{} & \zxX{\alpha} \ \rar & \zxZ{\pi}
\end{ZX}
};
\end{tikzpicture}
\end{equation*}


```

5.5 Further customization

You can further customize your drawings using any functionality from `TikZ` and `tikz-cd` (but it is of course at your own risk). For instance, we can change the separation between rows and/or columns for a whole picture (but prefer to use `zx row sep` as it also updates pre-configured column spaces):



$$\begin{array}{ccccccc} & & & & & & \\ & & & & & & \\ \mathbb{N} & \rightarrow & \mathbb{X} & \rightarrow \text{rd}, (.) & \rightarrow \text{urrr}, (', \text{H}) & & \\ & & & & & & \\ & & & & & & \\ \frac{\pi}{2} & \rightarrow \text{uur}, (') & \rightarrow \text{rru}, (<) & \rightarrow \text{rr} & & \mathbb{N} & \\ \mathbb{N} & \rightarrow & \frac{2}{\pi} & \rightarrow \text{ru}, (') & \rightarrow \text{rr}, (\text{o},.) & & \\ & & & & & & \\ \end{array}$$

Or we can define our own style to create blocks:



```
{ % \usetikzlibrary{shadows}
\tikzset{
  my bloc/.style={
    anchor=center,
    inner sep=2pt,
    inner xsep=.7em,
    minimum height=3em,
    draw,
    thick,
    fill=blue!10!white,
    double copy shadow={opacity=.5},tape,
  }
}
\zx{[my bloc] | f \rar &[1mm] | [my bloc] | g \rar &[1mm] \zxZ{\alpha} \rar & \zxNone{}}
```

We can also use for instance `fit`, `alias`, `execute at end picture` and `layers` (the user can use `background` for things behind the drawing, `box` for special nodes above the drawings (like multi-column nodes, see below), and `foreground` which is even higher) to do something like that:



```
% \usetikzlibrary{fit}
\begin{ZX}[
  execute at end picture={
    \node[
      inner sep=2pt,
      node on layer=background, %% Ensure the node is behind the drawing
      rounded corners,
      draw=blue,
      dashed,
      fill=blue!50!white,
      opacity=.5,
      fit=(cnot1)(cnot2), %% position of the node, thanks fit library
      "\textsc{cnot}" {above, inner sep=1mm} %% Adds label, thanks quote
      library. Not sure why, inner sep is set to 0 when using tikz "external"
      library.
    ] {};
  }
]
\zxNone{} \rar & \zxZ[alias=cnot1]{} \dar \rar & \zxNone{}\\
\zxNone{} \rar & \zxX[alias=cnot2]{} \rar & \zxNone{}\\
\end{ZX}
```

6 Future works

There is surely many things to improve in this library, and given how young it is there is surely many undiscovered bugs. So feel free to propose ideas or report bugs on the github page¹⁰. The intersections code is also quite slow, so I would be curious to check if I can optimize it (the first goal was to make it work). I should also work on the compatibility with tikzit (basically just write tikz configuration files that you can just use and document how to use tikzit with it), or even write a dedicated graphical tool (why not based on tikzit itself, or this tool¹¹). I also want to find a nicer way to merge cells (for now I propose to use the `fit` library but it's not very robust against overlays) and to nest ZX diagrams. And of course fix typos in the documentation and write other styles, including notations not specific to ZX-calculus. Feel free to submit Pull Requests to solve that, or to submit bug reports to explain uncovered use-cases!

7 Acknowledgement

I'm very grateful of course to everybody that worked on these amazing field which made diagramatic quantum computing possible, and to the many StackExchange users that helped me to understand a bit more \LaTeX and TikZ (sorry, I don't want to risk an incomplete list, but many thanks to egreg, David Carlisle, cfr, percusse, Andrew Stacey, Henri Menke, SebGlav...). I also thank Robert Booth for making me realize how my old style was bad, and for giving advices on how to improve it. Thanks to John van de Wetering, whose style has also been a source of inspiration.

8 Changelog

- 2022/02/09:
 - Added compatibility with external tikz library
 - More robust handling of `&`: `align` and `macros` does not need `\&` anymore.
 - `\&` in `\zxSaveDiagram` is replaced with `&`. This introduces a small backward incompatibility, but hey, I said it was still subject to changes :-)

¹⁰<https://github.com/leo-colisson/zx-calculus/issues>

¹¹<https://tikzcd.yichuanshen.de/>

Index

This index only contains automatically generated entries. A good index should also contain carefully selected keywords. This index is not a good index.

- '> key, 25
- 'v key, 25
- (key, 18
- (' key, 18, 19
-) key, 18
- N key, 24
- N' key, 24
- N. key, 24
- S key, 21
- S' key, 21
- S. key, 21
- andL/ key, 38
- andL/- key, 20
- andL/1 angle key, 20
- andL/1 angle and length key, 20
- andL/1- key, 20
- andL/1L key, 20
- andL/1a key, 20
- andL/1al key, 20
- andL/2 angle key, 20
- andL/2 angle and length key, 20
- andL/2- key, 20
- andL/2L key, 20
- andL/2al key, 20
- andL/L key, 20
- andL/a key, 20
- andL/al key, 20
- andL/angle key, 20
- andL/angle and length key, 20
- andL/default-S (default 1=0.8,1L=0) key, 38
- andL/defaultN (default 1=0.2,L=0.8) key, 38
- andL/defaultN- (default 1=0.4,1L=0) key, 38
- andL/defaultNIN (default 1=0,1L=0.6) key, 38
- andL/defaultNN (default) key, 38
- andL/default0 (default 1=0.2,L=0.4) key, 38
- andL/defaultS (default 1=0.8,L=0) key, 38
- andL/defaultS' (default 1=0.8,L=0.2) key, 38
- andL/defaultSIS (default 1=0,1L=0.8) key, 38
- andL/negate- key, 20
- andL/negate1- key, 20
- andL/negate1L key, 20
- andL/negate2- key, 20
- andL/negate2L key, 20
- andL/negateL key, 20
- andL/oneMinus1- key, 20
- andL/oneMinus1L key, 20
- andL/oneMinus2- key, 20
- andL/oneMinus2L key, 20
- andL/symmetry key, 20
- andL/symmetry-L key, 20
- o key, 18
- s key, 21
- s' key, 21
- s. key, 21
- .> key, 25
- .NN key, 25
- .SIS key, 23
- .sIs key, 22
- .ss key, 22
- <' key, 25
- <. key, 25
- 3 dots key, 26
- 3 vdots key, 26
- a key, 13
- amp key, 6
- \ar, 14
- \arrow, 14
- between none key, 33
- bezier key, 27
- bezier 4 key, 27
- bezier 4 x key, 27
- bezier 4 y key, 27
- bezier x key, 27
- bezier y key, 27
- bn key, 33
- C key, 17
- C' key, 17
- C- key, 17
- C. key, 17
- zx-calculus library, 2
- control points not visible key, 39
- control points visible key, 39
- \dar, 15
- default style nodes key, 34
- default style wires key, 35
- \dlar, 15
- dont use intersections key, 41
- down to up key, 19
- \drar, 15
- edge above key, 39
- edge not above key, 39
- end fake center east key, 19
- end fake center north key, 19
- end fake center south key, 19
- end fake center west key, 19
- end real center key, 19
- Environments
- ZX, 5
- force down to up key, 19

force left to right key, 19
 force right to left key, 19
 force up to down key, 19

H key, 26

I.SS key, 23

I.ss- key, 22

INN key, 25

intersections mode between start end key,
 50

intersections mode bezier controls key, 50

IO key, 27

IO/'> key, 31

IO/'v key, 31

IO/(key, 29

IO/(' key, 29

IO/) key, 29

IO/-N' key, 32

IO/-N. key, 32

IO/-o key, 29

IO/-s' key, 30

IO/-s. key, 30

IO/.> key, 31

IO/.sIs key, 30

IO/.ss key, 30

IO/<' key, 31

IO/<. key, 31

IO/C key, 28

IO/C' key, 28

IO/C- key, 28

IO/I.ss- key, 30

IO/N' key, 32

IO/N'- key, 32

IO/N. key, 32

IO/N.- key, 32

IO/o' key, 29

IO/o- key, 29

IO/o. key, 29

IO/s key, 30

IO/s' key, 30

IO/s'- key, 30

IO/s. key, 30

IO/s.- key, 30

IO/sIs. key, 30

IO/ss key, 30

IO/ss. key, 30

IO/ss.I- key, 30

IO/v' key, 31

ISS key, 23

\lar, 15

left to right key, 19

\leftManyDots, 10

Libraries

 zx-calculus, 2

ls key, 32

math baseline key, 13

\middleManyDots, 10

N key, 24

N' key, 24

N'- key, 24

N- key, 24

N. key, 24

N.- key, 24

Nbase key, 24

NIN key, 25

NN key, 25

NN. key, 25

NNI key, 25

no fake center key, 19

o' key, 18

o- key, 18

o. key, 18

Packages and files

 zx-calculus, 2

\rar, 15

right to left key, 19

rounded style key, 35

rounded style preload/big minus key, 37

rounded style preload/content fixed also
 frac key, 11

rounded style preload/content fixed

 baseline key, 10

rounded style preload/content vertically
 centered key, 10

rounded style preload/small minus key, 37

rounded style/big minus key, 37

rounded style/content fixed baseline key,
 10

rounded style/content vertically centered
 key, 10

rounded style/phase in content key, 12

rounded style/phase in label key, 12

rounded style/phase in label above key, 12

rounded style/phase in label below key, 12

rounded style/phase in label left key, 12

rounded style/phase in label right key, 12

rounded style/pil key, 12

rounded style/pila key, 12

rounded style/pilb key, 12

rounded style/pill key, 12

rounded style/pilr key, 12

rounded style/small minus key, 37

rounded style/zxAllNodes key, 35

rounded style/zxEmptyDiagram key, 35

rounded style/zxH key, 36

rounded style/zxHSmall key, 36

rounded style/zxLong key, 36

rounded style/zxLongX key, 36

rounded style/zxLongZ key, 36

rounded style/zxNone key, 35

rounded style/zxNone+ key, 35

rounded style/zxNone- key, 35

rounded style/zxNoneDouble key, 36

rounded style/zxNoneDouble+ key, 36

rounded style/zxNoneDouble- key, 36

rounded style/zxNoneDoubleI key, 36

rounded style/zxNoneI key, 36
rounded style/zxNoPhase key, 36
rounded style/zxNoPhaseSmall key, 36
rounded style/zxNoPhaseSmallX key, 36
rounded style/zxNoPhaseSmallZ key, 36
rounded style/zxNoPhaseX key, 36
rounded style/zxNoPhaseZ key, 36
rounded style/zxShort key, 36
rounded style/zxShortX key, 36
rounded style/zxShortZ key, 36
rounded style/zxSpiders key, 36

s key, 21
s' key, 21
S'- key, 21
s'- key, 21
S- key, 21
s- key, 21
s. key, 21
S.- key, 21
s.- key, 21
SIS key, 22
sIs. key, 22
SS key, 22
ss key, 22
ss. key, 22
SS.I key, 23
ss.I- key, 22
SSI key, 23

start fake center east key, 19
start fake center north key, 19
start fake center south key, 19
start fake center west key, 19
start real center key, 19

/tikz/
defaultEnv/
amp, 6
every node/
a, 13

\uar, 15
ui key, 42
\ular, 15
up to down key, 19
\urar, 15
use diagram key, 52
use intersections key, 41
user overlay key, 35
user overlay nodes key, 34
user overlay wires key, 35

v' key, 25

wc key, 27
wce key, 27
wcs key, 27
wire centered key, 27
wire centered end key, 27
wire centered start key, 27

X key, 26

Z key, 26

ZX environment, 5

\zx, 5

zx-calculus package, 2

/zx/

args/
-andL/, 38
-andL/-, 20
-andL/1 angle, 20
-andL/1 angle and length, 20
-andL/1-, 20
-andL/1L, 20
-andL/1a, 20
-andL/1al, 20
-andL/2 angle, 20
-andL/2 angle and length, 20
-andL/2-, 20
-andL/2L, 20
-andL/2al, 20
-andL/L, 20
-andL/a, 20
-andL/al, 20
-andL/angle, 20
-andL/angle and length, 20
-andL/default-S (default
1= .8, 1L=0), 38
-andL/defaultN (default -=.2, L=.8),
38
-andL/defaultN- (default
1= .4, 1L=0), 38
-andL/defaultNIN (default
1=0, 1L=.6), 38
-andL/defaultNN (default), 38
-andL/defaultO (default -=.2, L=.4),
38
-andL/defaultS (default -=.8, L=0),
38
-andL/defaultS' (default -=.8, L=.2),
38
-andL/defaultSIS (default
1=0, 1L=.8), 38
-andL/negate-, 20
-andL/negate1-, 20
-andL/negate1L, 20
-andL/negate2-, 20
-andL/negate2L, 20
-andL/negateL, 20
-andL/oneMinus1-, 20
-andL/oneMinus1L, 20
-andL/oneMinus2-, 20
-andL/oneMinus2L, 20
-andL/symmetry, 20
-andL/symmetry-L, 20
default style nodes, 34
default style wires, 35
defaultEnv/
math baseline, 13
zx column sep, 37, 38
zx row sep, 38
styles/
rounded style, 35

rounded style preload/big minus, 37	(, 18
rounded style preload/content fixed	(', 18, 19
also frac, 11), 18
rounded style preload/content fixed	-N, 24
baseline, 10	-N', 24
rounded style preload/content	-N., 24
vertically centered, 10	-S, 21
rounded style preload/small minus,	-S', 21
37	-S., 21
rounded style/big minus, 37	-o, 18
rounded style/content fixed	-s, 21
baseline, 10	-s', 21
rounded style/content vertically	-s., 21
centered, 10	.>, 25
rounded style/phase in content, 12	.NN, 25
rounded style/phase in label, 12	.SIS, 23
rounded style/phase in label above,	.sIs, 22
12	.ss, 22
rounded style/phase in label below,	<', 25
12	<., 25
rounded style/phase in label left,	3 dots, 26
12	3 vdots, 26
rounded style/phase in label right,	between none, 33
12	bezier, 27
rounded style/pil, 12	bezier 4, 27
rounded style/pila, 12	bezier 4 x, 27
rounded style/pilb, 12	bezier 4 y, 27
rounded style/pill, 12	bezier x, 27
rounded style/pilr, 12	bezier y, 27
rounded style/small minus, 37	bn, 33
rounded style/zxAllNodes, 35	C, 17
rounded style/zxEmptyDiagram, 35	C', 17
rounded style/zxH, 36	C-, 17
rounded style/zxHSmall, 36	C., 17
rounded style/zxLong, 36	control points not visible, 39
rounded style/zxLongX, 36	control points visible, 39
rounded style/zxLongZ, 36	dont use intersections, 41
rounded style/zxNone, 35	down to up, 19
rounded style/zxNone+, 35	edge above, 39
rounded style/zxNone-, 35	edge not above, 39
rounded style/zxNoneDouble, 36	end fake center east, 19
rounded style/zxNoneDouble+, 36	end fake center north, 19
rounded style/zxNoneDouble-, 36	end fake center south, 19
rounded style/zxNoneDoubleI, 36	end fake center west, 19
rounded style/zxNoneI, 36	end real center, 19
rounded style/zxNoPhase, 36	force down to up, 19
rounded style/zxNoPhaseSmall, 36	force left to right, 19
rounded style/zxNoPhaseSmallX, 36	force right to left, 19
rounded style/zxNoPhaseSmallZ, 36	force up to down, 19
rounded style/zxNoPhaseX, 36	H, 26
rounded style/zxNoPhaseZ, 36	I.SS, 23
rounded style/zxShort, 36	I.ss-, 22
rounded style/zxShortX, 36	INN, 25
rounded style/zxShortZ, 36	intersections mode between start
rounded style/zxSpiders, 36	end, 50
user overlay, 35	intersections mode bezier controls,
user overlay nodes, 34	50
user overlay wires, 35	IO, 27
wires definition/	IO/'>, 31
'>, 25	IO/'v, 31
'v, 25	IO/(/, 29

IO/(, 29
 IO/), 29
 IO/-N', 32
 IO/-N., 32
 IO/-o, 29
 IO/-s', 30
 IO/-s., 30
 IO/., 31
 IO/.sIs, 30
 IO/.ss, 30
 IO/<', 31
 IO/<., 31
 IO/C, 28
 IO/C', 28
 IO/C-, 28
 IO/I.ss-, 30
 IO/N', 32
 IO/N'-, 32
 IO/N., 32
 IO/N-, 32
 IO/o', 29
 IO/o-, 29
 IO/o., 29
 IO/s, 30
 IO/s', 30
 IO/s'-, 30
 IO/s., 30
 IO/s.-, 30
 IO/sIs., 30
 IO/ss, 30
 IO/ss., 30
 IO/ss.I-, 30
 IO/v', 31
 ISS, 23
 left to right, 19
 ls, 32
 N, 24
 N', 24
 N'-, 24
 N-, 24
 N., 24
 N-, 24
 Nbase, 24
 NIN, 25
 NN, 25
 NN., 25
 NNI, 25
 no fake center, 19
 o', 18
 o-, 18
 o., 18
 right to left, 19
 s, 21
 s', 21
 S'-, 21
 s'-, 21
 S-, 21
 s-, 21
 s., 21
 S-, 21
 s.-, 21
 SIS, 22
 sIs., 22
 SS, 22
 ss, 22
 ss., 22
 SS.I, 23
 ss.I-, 22
 SSI, 23
 start fake center east, 19
 start fake center north, 19
 start fake center south, 19
 start fake center west, 19
 start real center, 19
 ui, 42
 up to down, 19
 use diagram, 52
 use intersections, 41
 v', 25
 wc, 27
 wce, 27
 wcs, 27
 wire centered, 27
 wire centered end, 27
 wire centered start, 27
 X, 26
 Z, 26
 zx column sep key, 37, 38
 zx row sep key, 38
 \zxAmp, 5
 \zxControlPointsVisible, 39
 \zxConvertToFracInContent, 36
 \zxConvertToFracInLabel, 36
 \zxDebugMode, 13
 \zxDefaultColumnSep, 38
 \zxDefaultRowSep, 38
 \zxDefaultSoftAngleChevron, 38
 \zxDefaultSoftAngle0, 38
 \zxDefaultSoftAngleS, 38
 \zxDisableIntersections, 41
 \zxDotsCol, 38
 \zxDotsRow, 38
 \zxEdgesAbove, 39
 \zxEmptyDiagram, 6
 \zxEnableIntersections, 41
 \zxEnableIntersectionsNodes, 41
 \zxEnableIntersectionsWires, 41
 \zxFracX, 8
 \zxFracZ, 8
 \zxH, 9
 \zxHCol, 37
 \zxHColFlat, 37
 \zxHRow, 37
 \zxHRowFlat, 37
 \zxHSCol, 37
 \zxHSColFlat, 37
 \zxHSRow, 37
 \zxHSRowFlat, 37
 \zxIntersectionLineBetweenStartEnd, 50
 \zxLoop, 10
 \zxLoopAboveDots, 10
 \zxMinus, 37

- \zxMinusInShort, 37
- \zxMinusUnchanged, 37
- \zxN, 6
- \zxNCol, 38
- \zxNL, 7
- \zxNone, 6
- \zxNoneDouble, 8
- \zxNR, 7
- \zxNRow, 38
- \zxSaveDiagram, 52
- \zxSCol, 37
- \zxSColFlat, 37
- \zxSRow, 37
- \zxSRowFlat, 37
- \zxWCol, 37
- \zxwCol, 38
- \zxWRow, 37
- \zxwRow, 38
- \zxX, 9
- \zxZ, 9
- \zxZeroCol, 38
- \zxZeroRow, 38