

Administration

Configuration name : LoadWizardProLidar
Description of application :
Responsible person :
Machine ID :
Configuration date : 3/3/2026 5:00:54 PM
Signature :

Device functionFunction mode

Operation Mode Protection Mode : Single Protection Mode

Contactor monitoring / E-Stop inputs

EDM OSSD A : Inactive
Use of the inputs SE1 and SE2 : Monitoring of field pair switchover

Protective Function AProtective function

Description :

Mode for field pair activation and changeover

Field pair activation A : Fixed selection of one field pair

Bank A1Resolution

Maximal vehicle speed : 0 mm/s
Description :
Resolution : 30 mm

Response time

Response time : 200 ms

Start-up behavior

Start behavior : Automatic start/restart


Restart time : 520 ms

A1.1

Field pair

Description :

Field pair monitoring : Active

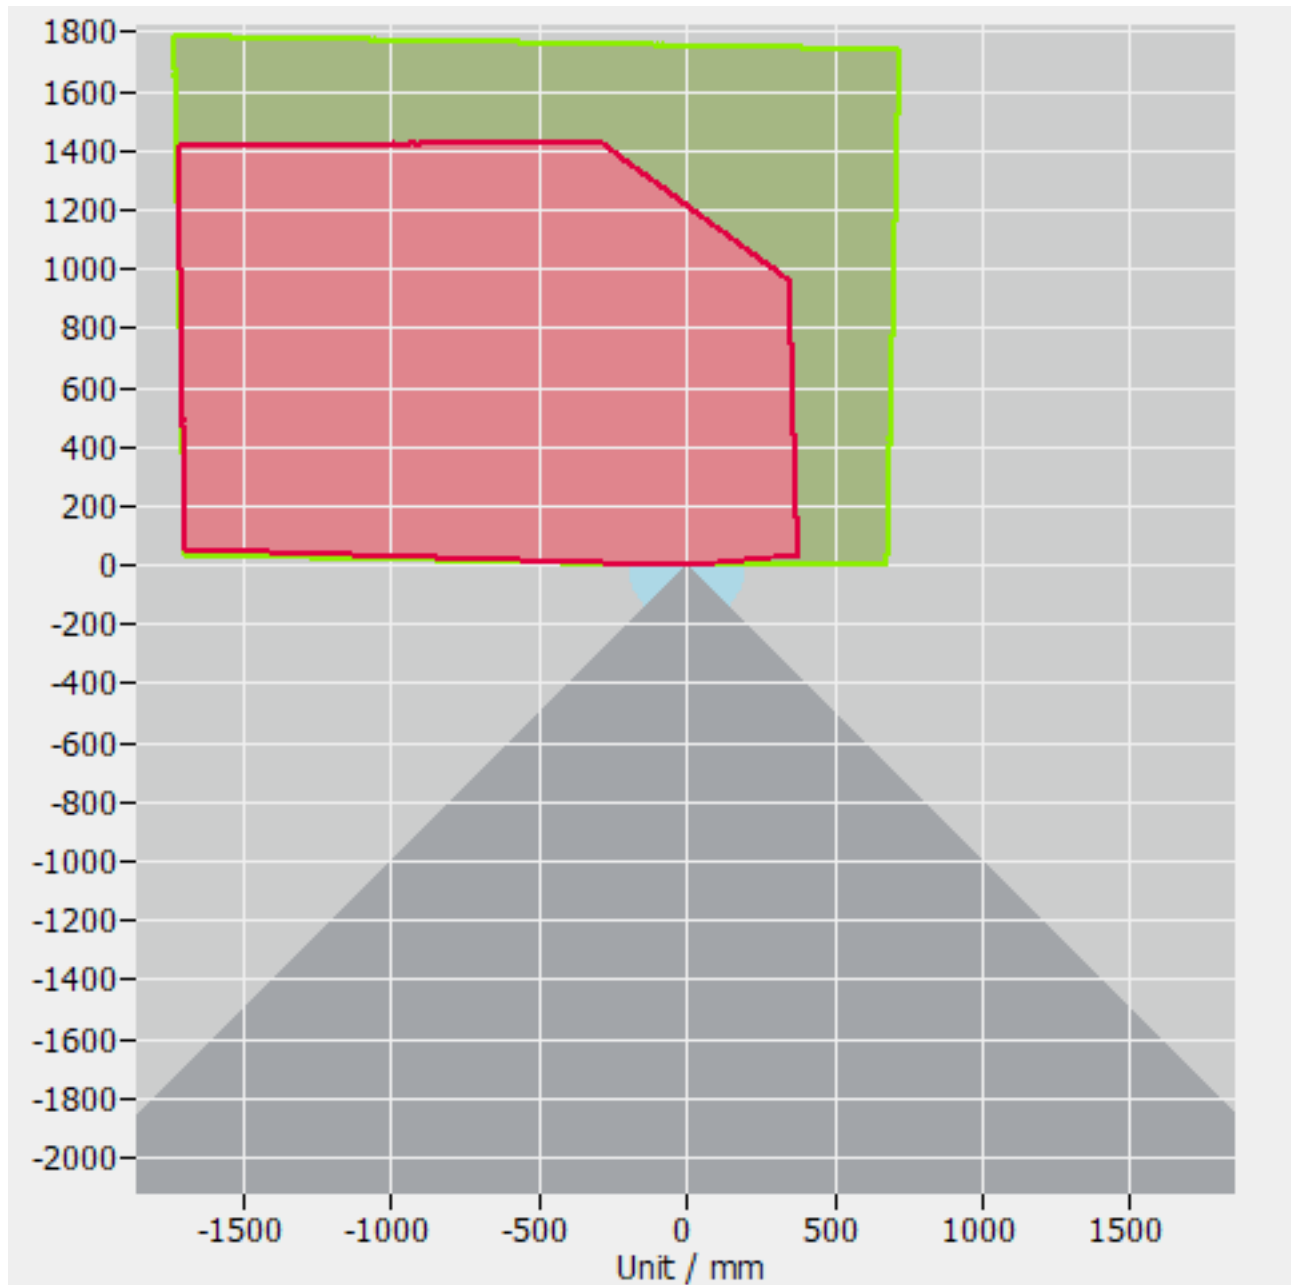

Installation position: Normal

Monitoring of field pair changeover

Monitoring : Inactiv

Reflectors

Detect reflectors

Reflector analysis : Inactive

Outputs

Connection	Use	Function group	Output signal
MELD		Inactive	Inactive
A1		Protective function A	A-WF-VIO
A2		Protective function A	A-PF-VIO
EA1		Inactive	Inactive

Other

Protection against manipulation

Monitoring time : Inactive