

EEG Toolbox - Signal Processing Report

Version 2.0 | developed by Davide Masciola

1. Pipeline Log

Data Loaded: Loaded S001R05.edf with 64 channels at 160.0 Hz for 125.00 seconds.

Bad Channels Removed: Removed and Interpolated channels: Afz..

Re-referencing: Data re-referenced using Common Average Reference (CAR).

Current Artifact Removal: Applied current artifact removal with 60 Hz notch filter and Q-factor: 400.

ICA: Applied Independent Component Analysis through Welch Method, isolated 5 independent components, removed components: 3, 5.

Filtering: Applied Bandpass Filter FIR filter with order: 1320; method: Least Squares; cutoff frequencies: 4.0 Hz, 7.0 Hz, with transition width: 0.2 Hz.


PSD: Analyzed Power Spectral Density of the signal.

EEG Toolbox - Signal Processing Report

Version 2.0 | developed by Davide Masciola

2. Visualizations


Electrode Topography

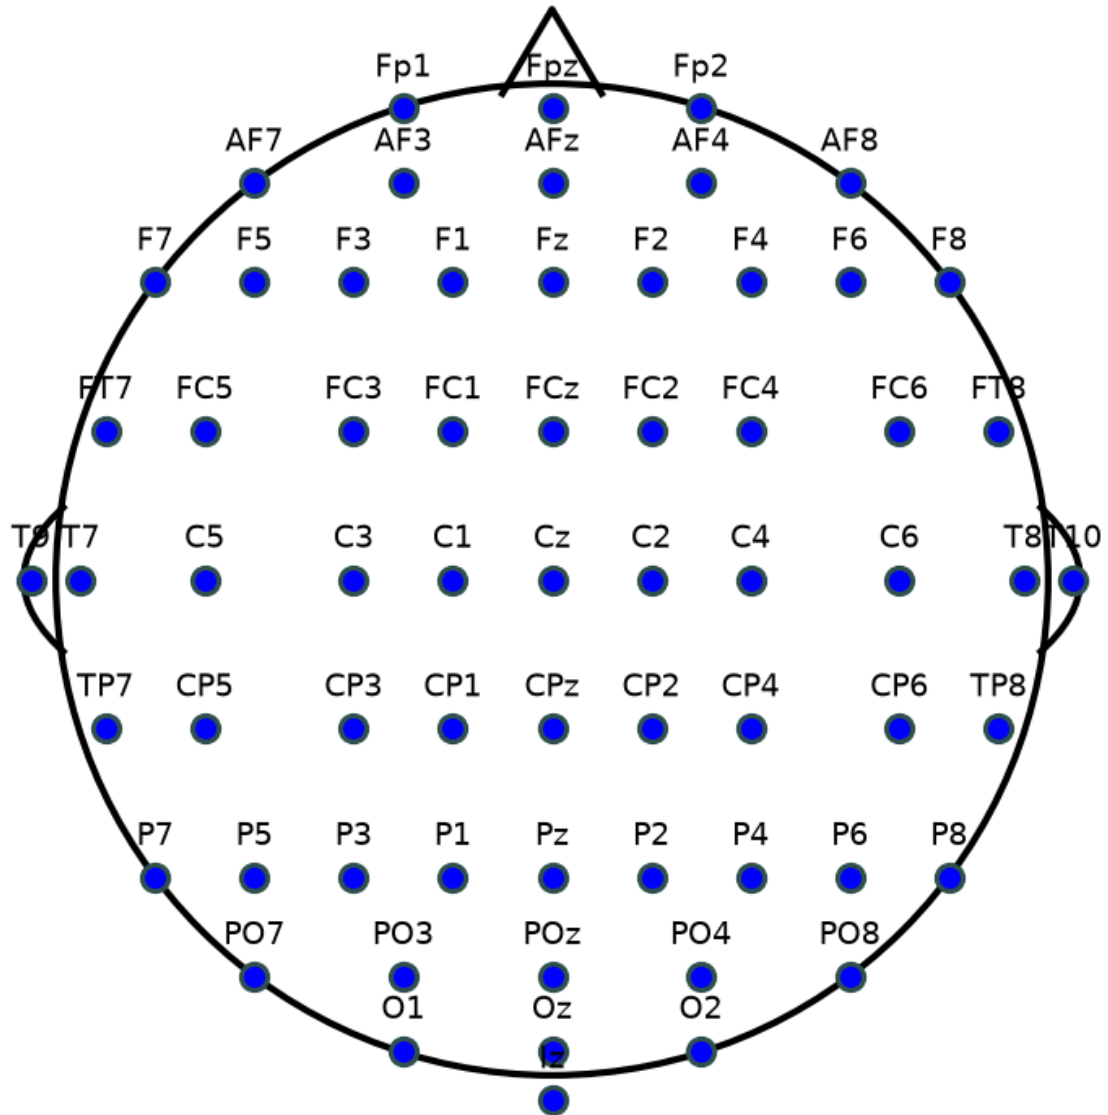

EEG Toolbox - Signal Processing Report

Version 2.0 | developed by Davide Masciola


Raw Signal Overview

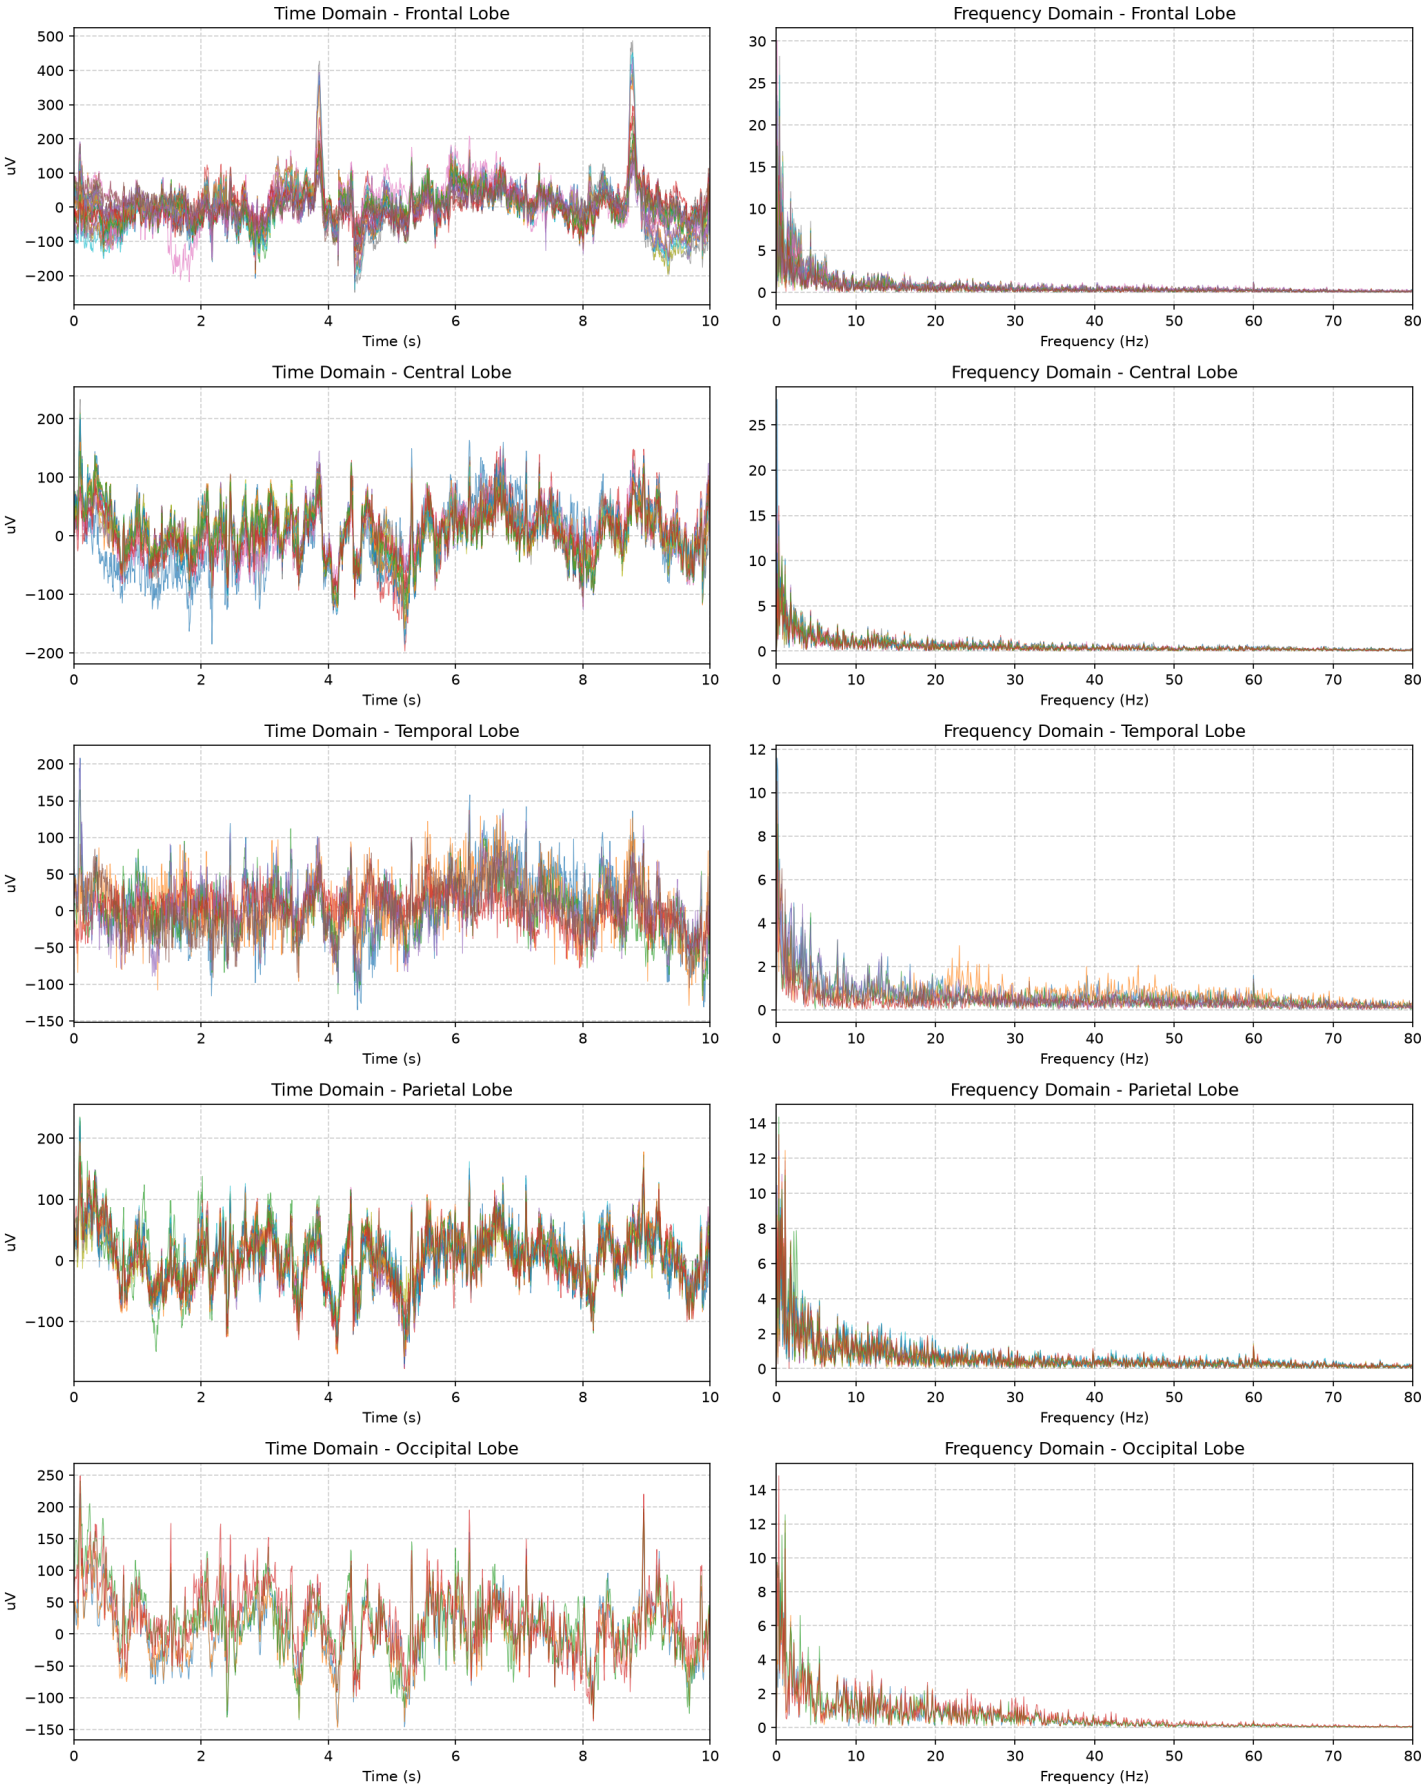

EEG Toolbox - Signal Processing Report

Version 2.0 | developed by Davide Masciola

Processed Signal

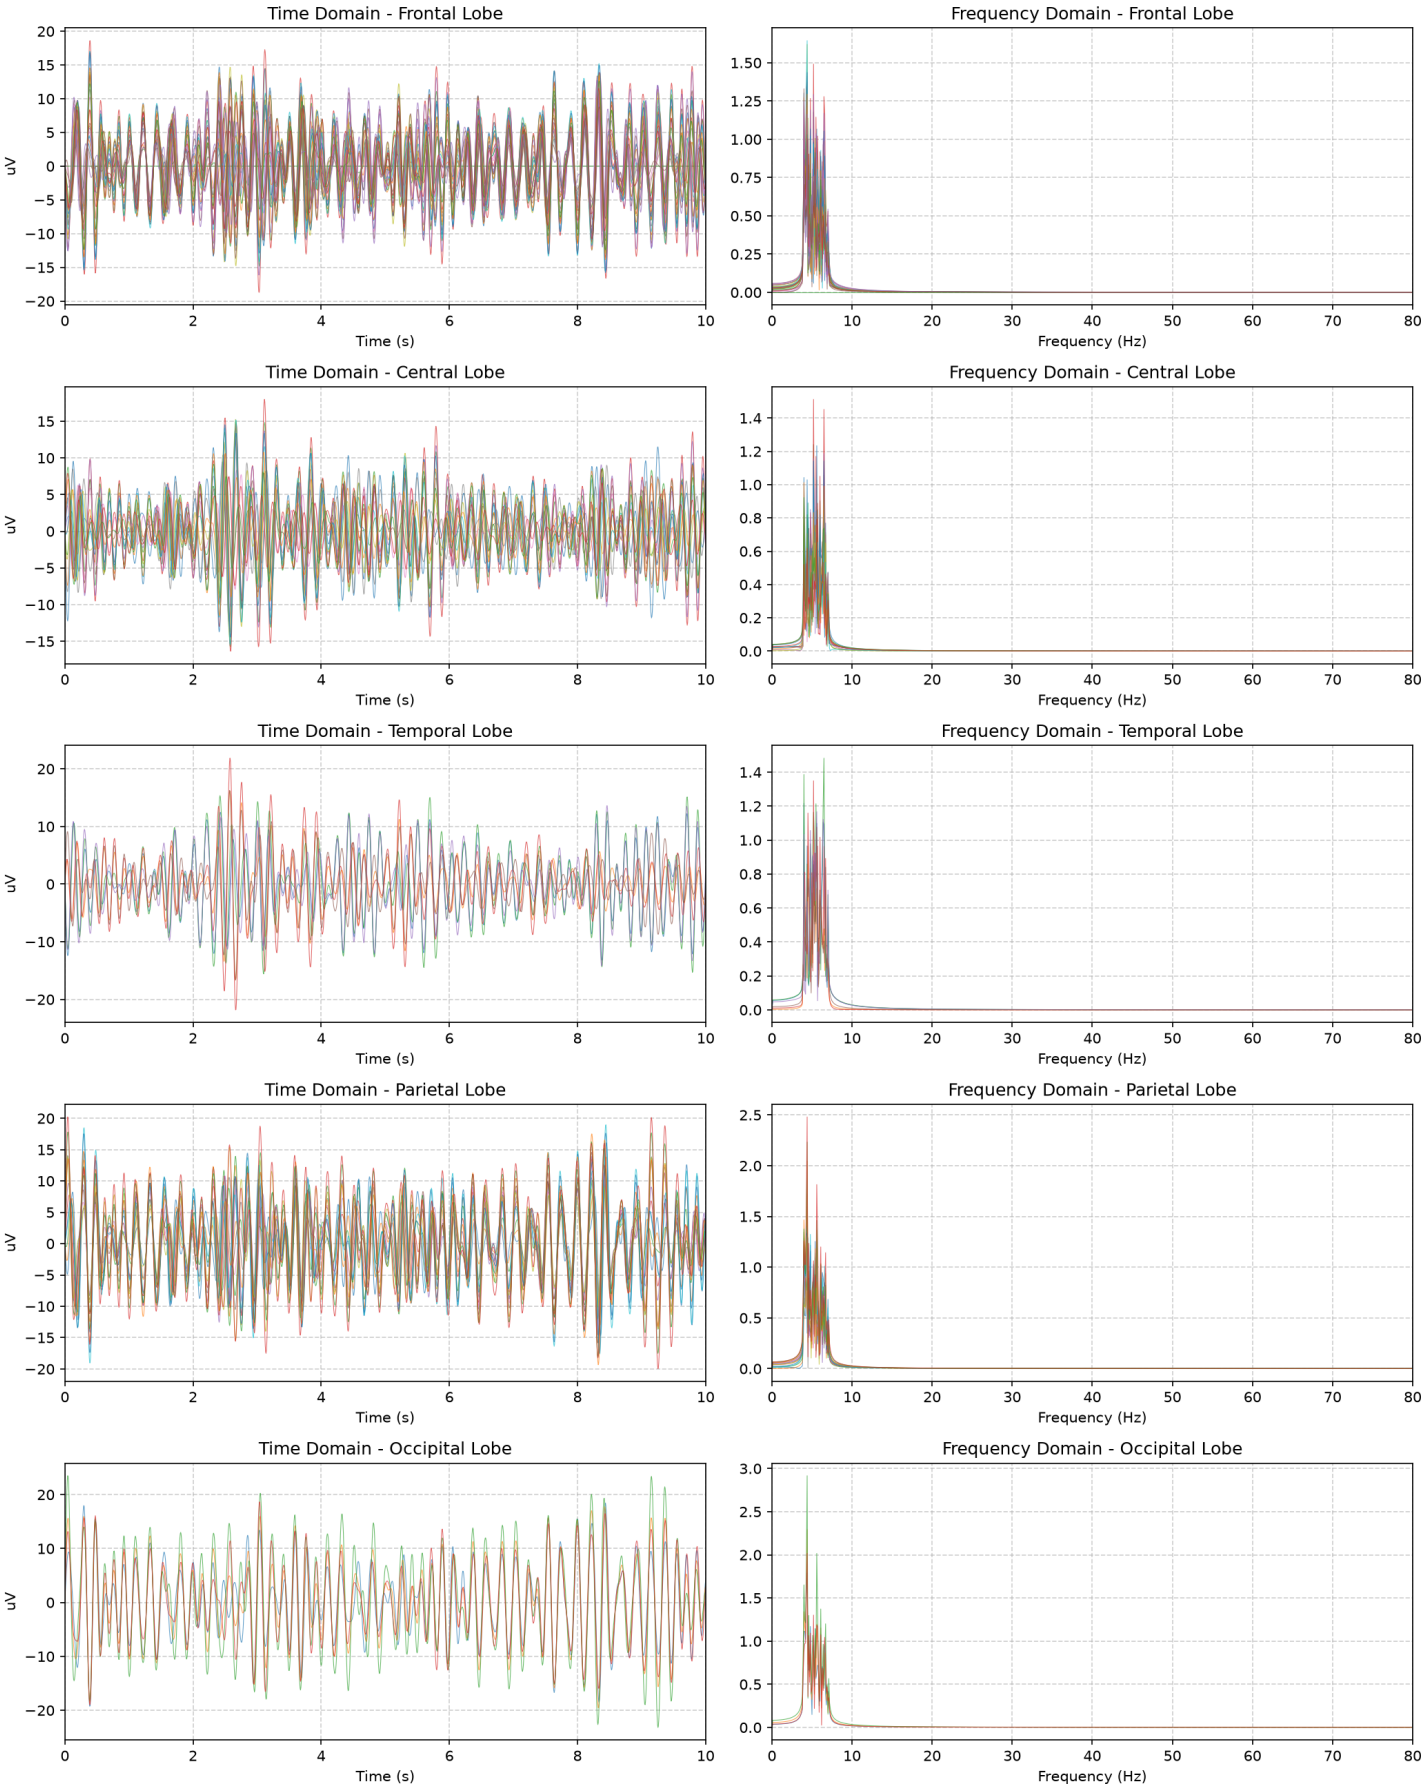

EEG Toolbox - Signal Processing Report

Version 2.0 | developed by Davide Masciola

Power Spectral Density

