TECHNICAL EVIDENCE

PerfMon Infrastructure Analysis

PerfMon Capture 1

BFROOT1

PerfMon Counters

8 checks against thresholds · values are capture averages

66 / 100

CRITICAL



Critical	Needs Attention	Healthy
0 to 69	70 to 89	90 to 100

CHECKS AGAINST THRESHOLDS · 8 CHECKS

STORAGE QUEUE DEPTH	STORAGE LATENCY	STORAGE OPERATIONS	CPU PRIVILEGED TIME
0.35	2.05 ms	478	19.28%
Limit 1.	Limit 1 ms.	Transfers per second. No fixed pass/fail limit.	Limit 10% of CPU time.

CPU UTILIZATION	CPU LATENCY	NETWORK HEALTH	MEMORY HEALTH
40.27%	0.37	0	Not supplied
Limit 80% of CPU time.	Limit 4.	Errors should approach zero.	Cannot verify without physical memory.

FINDINGS RAISED

3 total · 2 critical · 1 cannot verify

IDs PRF-INF-02, PRF-INF-06, PRF-INF-09

Values are capture averages from Assessment by Area. Every reading is in the Excel sheet Raw Data.

Score ranges: 90 to 100 Healthy, 70 to 89 Needs Attention, 0 to 69 Critical. Points per area: Pass 100, Advisory 55, Cannot Verify 25, Fail 0.

How This Score Is Calculated

The PerfMon Infrastructure Score is based on how each monitored counter area compares to its applicable threshold during the capture window:

Pass: 100 points | Advisory: 55 points | Cannot Verify: 25 points | Fail: 0 points

Formula: Pass% x 100 + Advisory% x 55 + Cannot Verify% x 25 + Fail% x 0

Each area takes the status of its worst counter, judged on that counter's average. A few high readings can raise an average over the limit. Each area section gives the peak and the number of readings over the limit.

Score ranges: 90 to 100 is Healthy, 70 to 89 is Needs Attention and 0 to 69 is Critical.

Capture Summary

Of the 14 counters reviewed, 3 did not meet the standard, 10 met it and 1 could not be verified. The 14 counters roll up into the 8 areas in the Infographic. Each area takes the status of its worst counter.

Analyzed system: BFROOT1. Capture window: 06-14-2026 20:17 to 06-14-2026 21:16 across 60 readings.

Hardware / Context	Value / Source
Logical Processors	4 (Detected from BLG)
Physical Memory	Not supplied
Physical Disks	1 (Detected from BLG)
Virtual Machine	No


Supporting workbook: S7_20261021_110224_Perfmon.xlsx


Automated Findings

Finding ID	Area	Review Context
PRF-INF-02	Storage Latency	Fail. Average 2.05 ms against a limit of 1 ms. Peak 40.7 ms. 4 of 59 readings were over the limit. See Storage Latency.
PRF-INF-06	CPU Privileged Time	Fail. Average 19.28% against a limit of 10%. Peak 32.95%. 54 of 59 readings were over the limit. See CPU Privileged Time.
PRF-INF-09	Memory Health	Cannot Verify. Page file in use should be 5% of physical memory or less. Physical memory was not supplied, so this area cannot be verified. Cannot Verify earns 25 points in the score. See Memory Health.

Storage Queue Depth

✓ **Observation:** The standard was met for this capture window. The worst counter averaged 0.35 against a limit of 1 across 60 readings, with a peak of 4.00. 4 readings were briefly over the limit, but the average stayed within it. 2 related counters were reviewed and all met the standard.

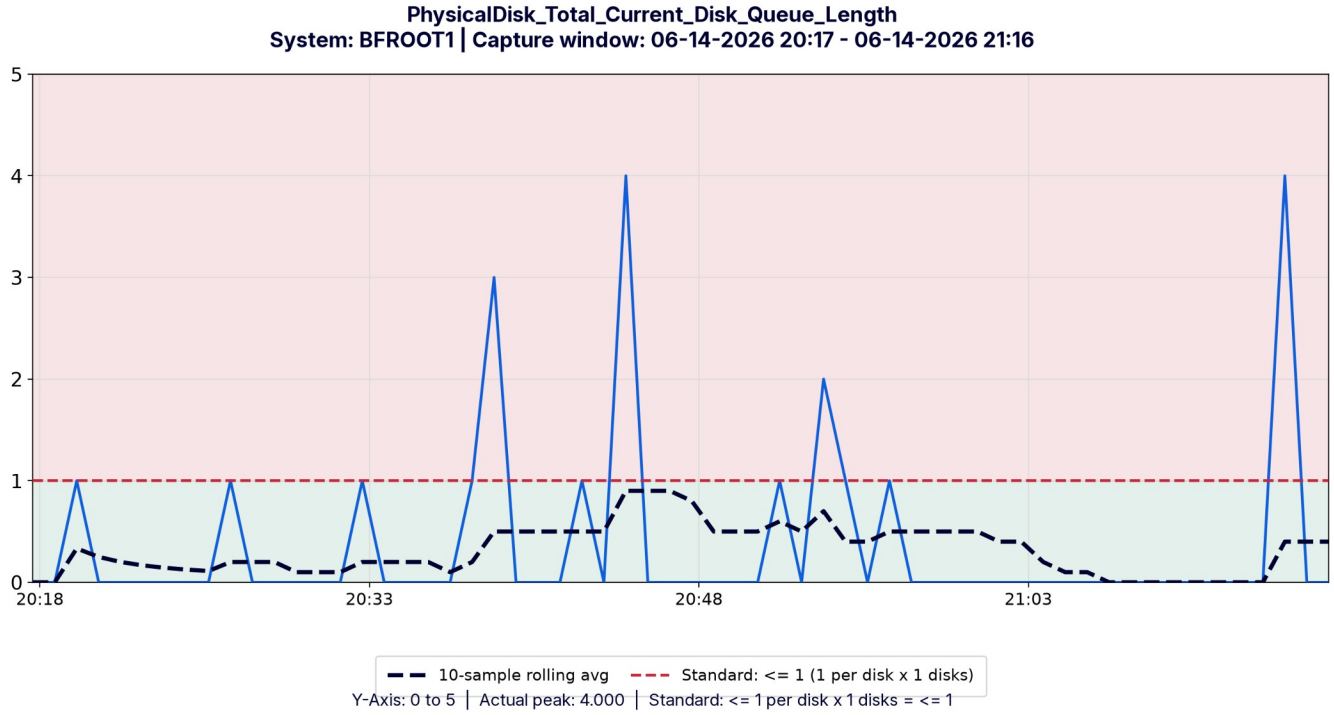

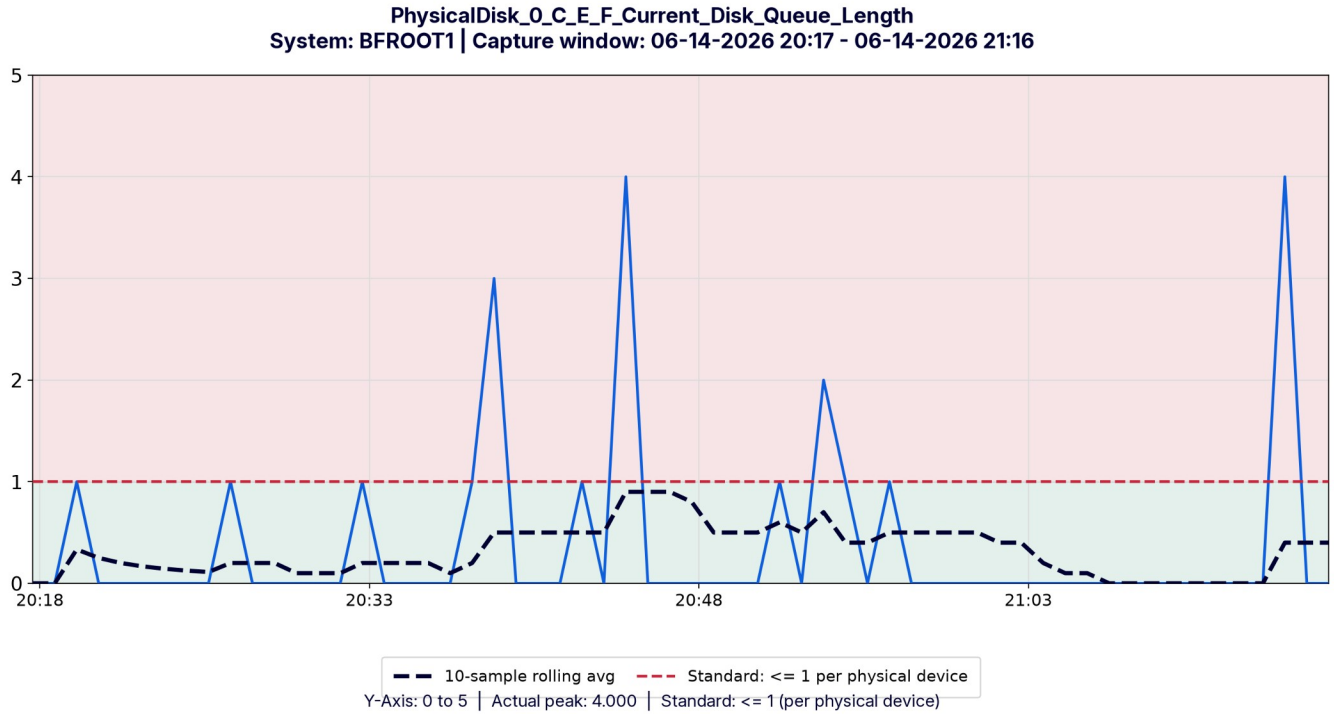


Storage Latency


✗ **Observation:** The standard was not met for this capture window. The worst counter averaged 2.05 ms against a limit of 1 ms. 4 of 59 readings (6.78%) were over the limit, in the breach window 06-14-2026 20:34:40 to 06-14-2026 20:40:40. They raised the average over the limit. The other 55 readings met the standard. It peaked at 40.7 ms. 2 related counters need review in this section.

Affected Counters Requiring Review

✗ Counter: PhysicalDisk_Total_Avg_Disk_ms_Transfer: average 2.05 ms, peak 40.7 ms, 4 readings (6.78%) over the limit.


✗ Counter: PhysicalDisk_0_C_E_F_Avg_Disk_ms_Transfer: average 2.05 ms, peak 40.7 ms, 4 readings (6.78%) over the limit.

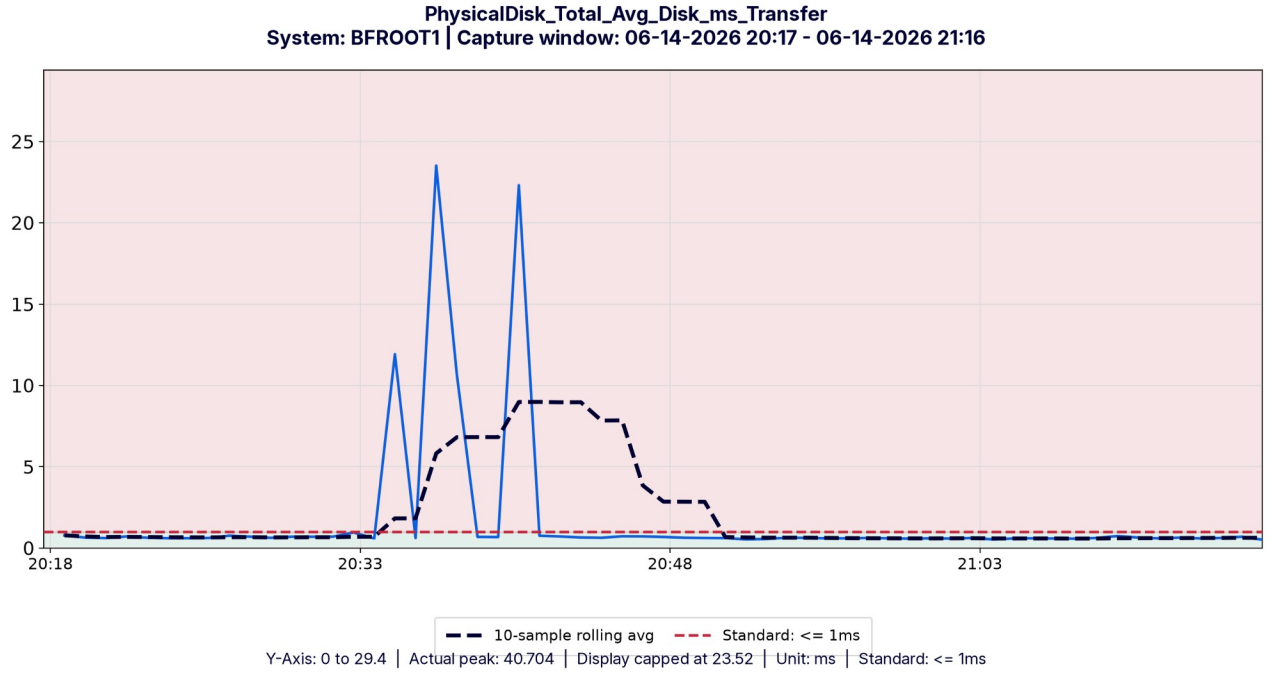


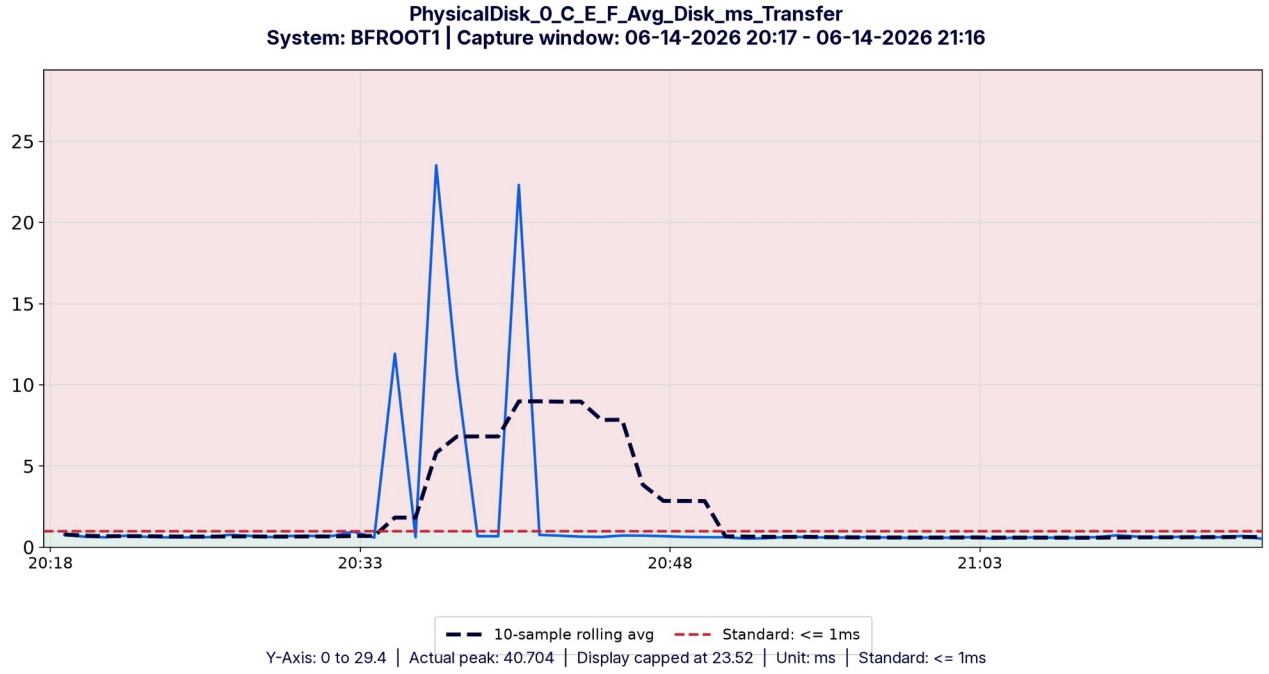

Storage Operations

✓ Observation: This counter has no limit. It is reviewed for saturation or flat-lining. The highest reading was 1,924 and the average was 478 across 59 readings. Both counters are shown for workload review. No fixed pass/fail limit is applied.

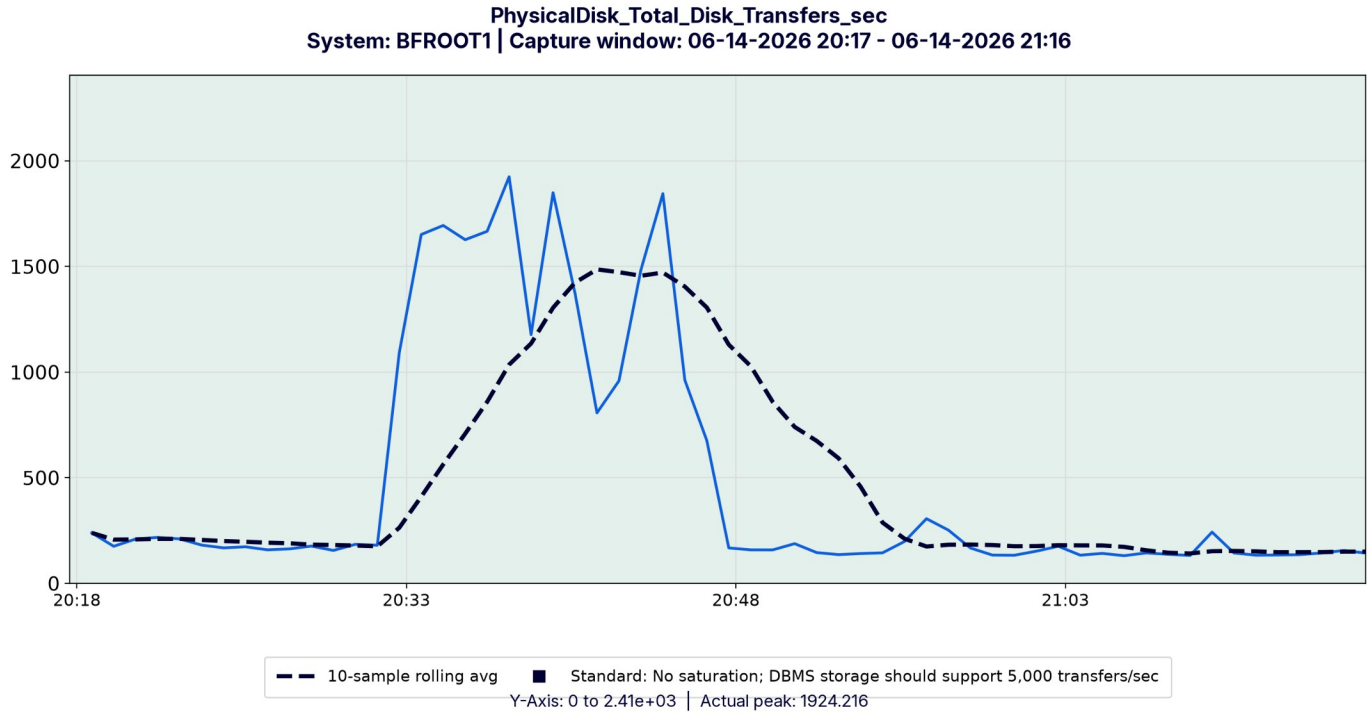

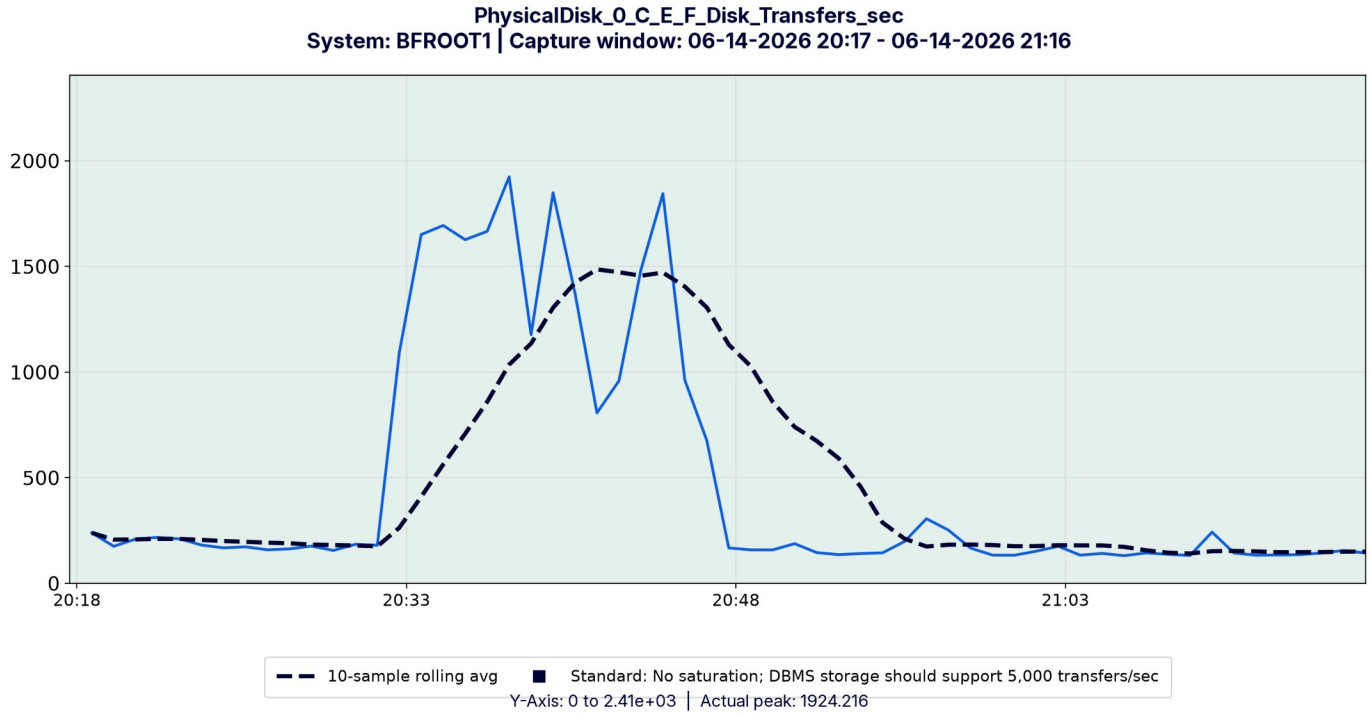


CPU Privileged Time

✗ **Observation:** The standard was not met for this capture window. The worst counter averaged 19.3% against a limit of 10%. The average stayed over the limit for most of the capture. It peaked at 33.0%, with 54 of 59 readings (91.5%) over the limit. Breach window: 06-14-2026 20:18:40 to 06-14-2026 21:15:40.


Affected Counters Requiring Review

✗ Counter: Processor_Total_Privileged_Time: average 19.28%, peak 32.95%, 54 readings (91.53%) over the limit.

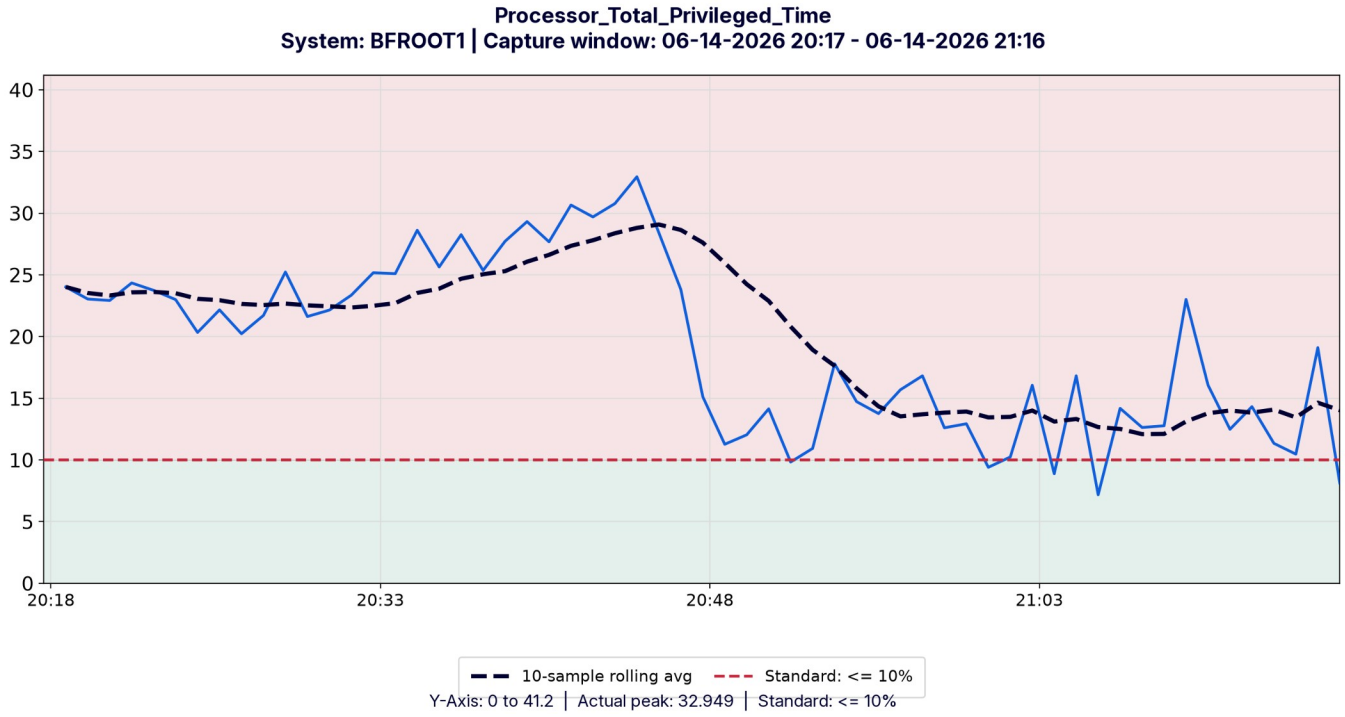


CPU Utilization

✓ **Observation:** The standard was met for this capture window. The worst counter averaged 40.3% against a limit of 80% across 59 readings, with a peak of 65.9%.

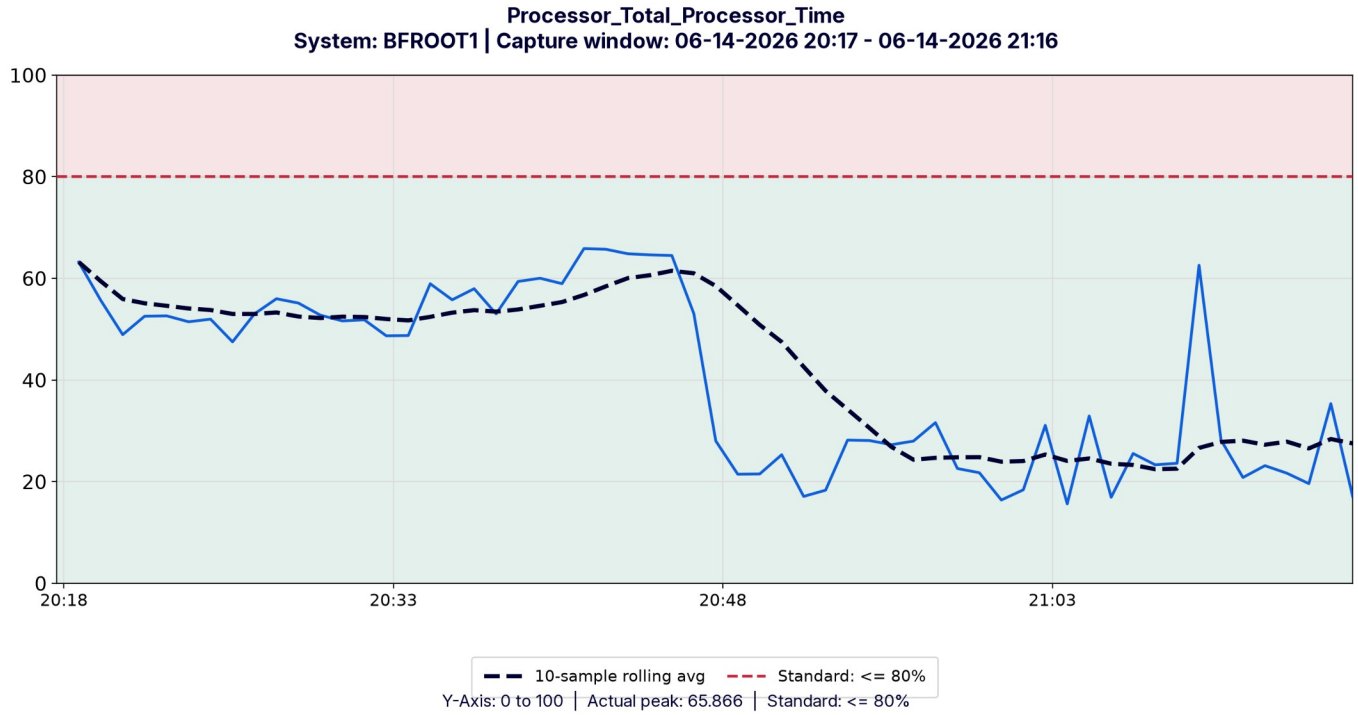

CPU Latency

✓ **Observation:** The standard was met for this capture window. The worst counter averaged 0.37 against a limit of 4 across 60 readings, with a peak of 15.0. 2 readings were briefly over the limit, but the average stayed within it.

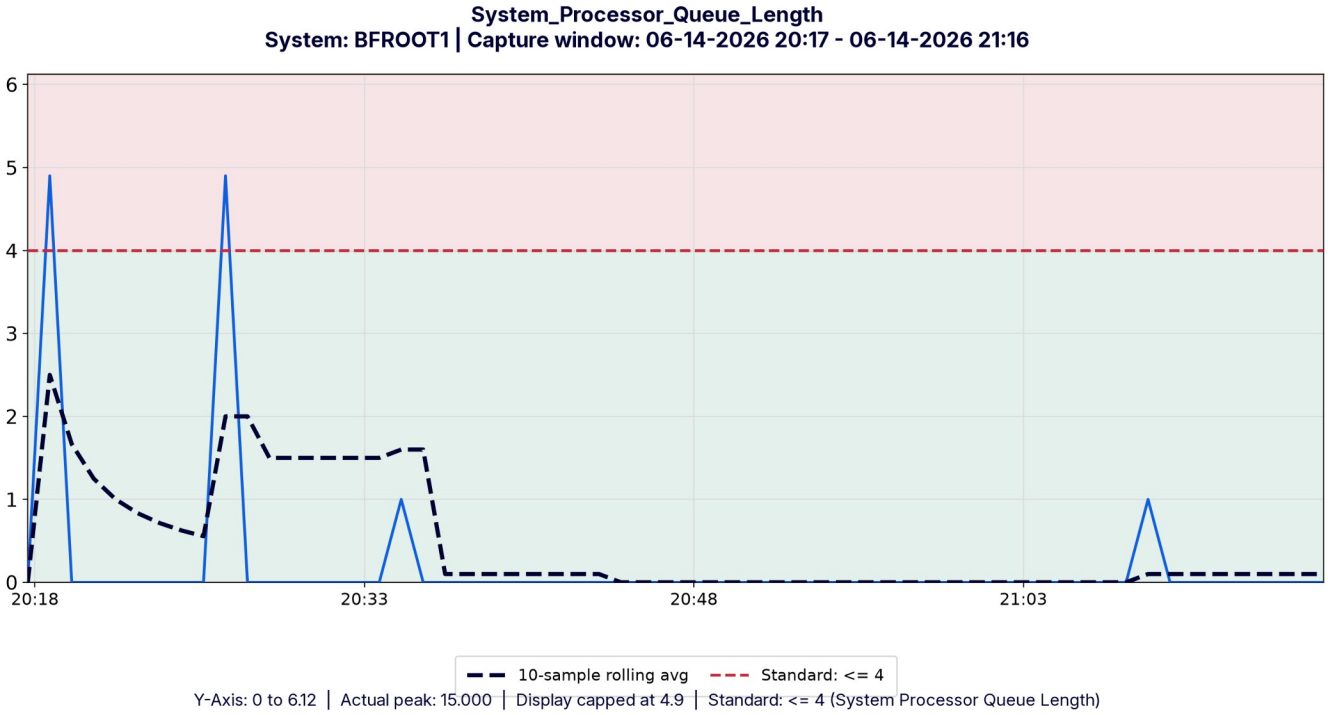

Network Health

✓ **Observation:** No packet errors or discards were added between samples across 59 readings. 4 related counters were reviewed and all met the standard.

Network_Interface_Intel_R_82574L_Gigabit_Network_Connection_Packets_Outbound_Discarded

No packet errors or discards recorded over 59 min - PASS

Standard: ~= 0 increase (no packet errors/discards)

System: BFROOT1 | Capture window: 06-14-2026 20:17 - 06-14-2026 21:16 | Recorded samples: 59 | True Max: 0

Network_Interface_Intel_R_82574L_Gigabit_Network_Connection_Packets_Outbound_Errors

No packet errors or discards recorded over 59 min - PASS

Standard: ~= 0 increase (no packet errors/discards)

System: BFROOT1 | Capture window: 06-14-2026 20:17 - 06-14-2026 21:16 | Recorded samples: 59 | True Max: 0

Network_Interface_Intel_R_82574L_Gigabit_Network_Connection_Packets_Received_Discarded

No packet errors or discards recorded over 59 min - PASS

Standard: ~= 0 increase (no packet errors/discards)

System: BFROOT1 | Capture window: 06-14-2026 20:17 - 06-14-2026 21:16 | Recorded samples: 59 | True Max: 0

Network_Interface_Intel_R_82574L_Gigabit_Network_Connection_Packets_Received_Errors

No packet errors or discards recorded over 59 min - PASS

Standard: ~= 0 increase (no packet errors/discards)

System: BFROOT1 | Capture window: 06-14-2026 20:17 - 06-14-2026 21:16 | Recorded samples: 59 | True Max: 0

Memory Health

? Observation: Physical memory was not supplied, so this area cannot be verified. Cannot Verify earns 25 points in the score. PRF-INF-09 measures page file use against physical memory.

Affected Counters Requiring Review

? Counter: Paging_File_Total_Usage_Peak. It was not compared with the limit because physical memory was not supplied.

Paging_File_Total_Usage_Peak

Not scored: physical memory was not supplied - CANNOT VERIFY

Standard: <= 5% of physical memory

System: BFROOT1 | Capture window: 06-14-2026 20:17 - 06-14-2026 21:16

Assessment by Area

Area	Status	Standard / Basis	Observed
Storage Queue Depth	✓ **Pass**	<= 1 per disk x 1 disks = <= 1	avg 0.35, peak 4.0, 4 readings over
Storage Latency	✗ **Fail**	<= 1ms	avg 2.05 ms, peak 40.7 ms, 4 readings over
Storage Operations	✓ **Pass**	No limit. Reviewed for flat-lining against 5,000 transfers per second.	avg 477.57, peak 1924.22
CPU Privileged Time	✗ **Fail**	<= 10%	avg 19.28%, peak 32.95%, 54 readings over
CPU Utilization	✓ **Pass**	<= 80%	avg 40.27%, peak 65.87%
CPU Latency	✓ **Pass**	<= 4 (System Processor Queue Length)	avg 0.37, peak 15.0, 2 readings over
Network Health	✓ **Pass**	Packet errors and discards should approach zero per interface. Evaluated as the non-negative increase between samples	avg 0.0, peak 0.0
Memory Health	**? Cannot Verify**	Page file in use should be <= 5% of physical memory. Physical memory was not supplied, so this area cannot be verified. Cannot Verify earns 25 points in the score.	Paging_File_Total_Usage_Peak