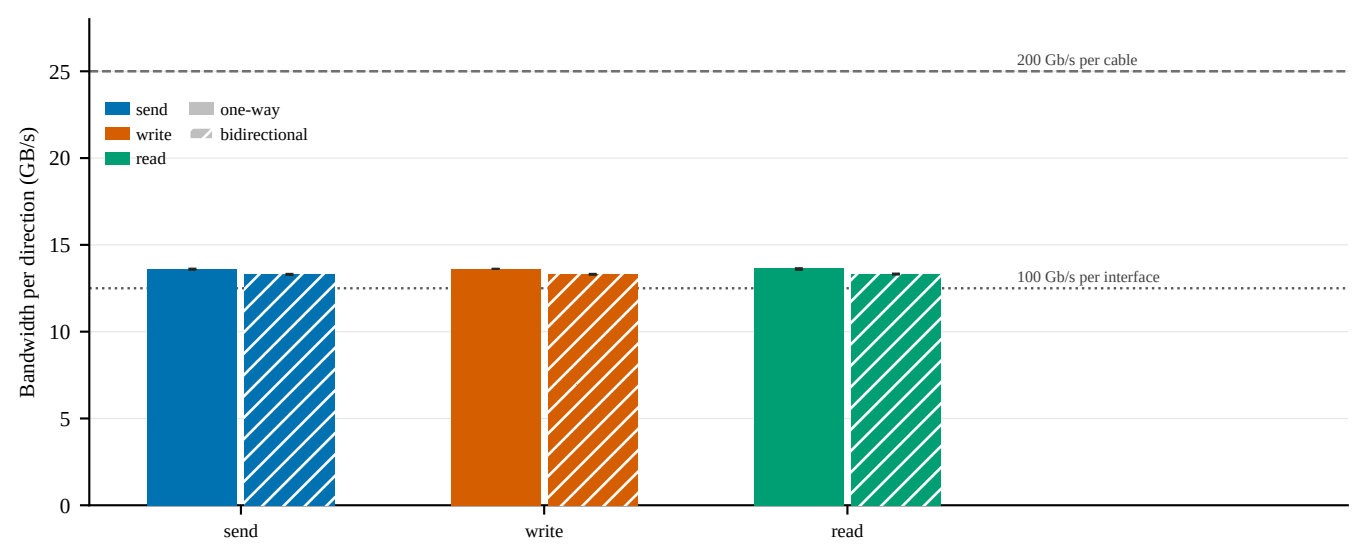

client-side perftest tables; 64 KiB messages; 10 repeats per device, one interface tested at a time
bars pool 6 device instances over 2 campaigns; whiskers = min-max; 2 logical interfaces per 200 Gb/s QSFP port, 2 ports per NIC
bidirectional bars halve the -b aggregate (mean 26.6 GB/s) to one direction