BOURNS®

Features
- RoHS compliant*
- Convex and concave terminals
- 2, 4 or 8 isolated elements available
- Resistance tolerance ±1 % and ±5 %
- Resistance range: 10 ohms to 1 megohm

CAT/CAY 16 Series - Chip Resistor Arrays

Specifications

Requirement	Characteristics	Test Method
Short Time Overload	±2 % +0.1 ohm	Rated Voltage X 2.5, 5 seconds
Soldering Heat	±2 % +0.1 ohm	260 °C ±5 °C, 10 seconds ±1 second
Temperature Cycling (5)	±1 % + 0.1 ohm	125 °C (30 minutes) - normal (15 minutes) -55 °C (30 minutes) - normal (15 minutes)
Moisture Load Life	±3 % +0.1 ohm	1000 hours
Load Life	±3 % +0.1 ohm	1000 hours

Characteristics

Characteristics	CAT16/CAY16
Number of Elements	2 (J2), 4 (F4, J4), 8 (F8, J8)
Power Rating Per Resistor	62 mW (31 mW for CAY16-J8)
Resistance Tolerance	±1 %, ±5 %
Resistance Range: E24 (J), E96 + E24 (F) Zero-Ohm Jumper < 0.05 ohm	10 ohms - 1 megohm
Max. Working Voltage	50 V (25 V for CAY16-J8)
Operating Temp. Range	-55 °C - 125 °C

Soldering Profile for RoHS Compliant Chip Resistors and Arrays

<1> Maximum of 20 seconds between +255 °C and +260 °C

260 °C peak
<1> 255 °C
220 °C
190 °C
60 - 90 seconds
150 °C
Ramp Down 6 °C/second
60 - 120 seconds
10 seconds minimum
Ramp Up 3 °C/second maximum

Temperature (°C) vs Time (seconds)

How To Order

CA Y 16 - 103 J 4 LF

Chip Arrays

Type
- CAT16 = Concave Terminations
- CAY16 = Convex Terminations

Resistance Code
- 103 = 10 K ohms
- 1003 = 100 K ohms (1 % tolerance)
- 000 = Zero-ohm

Resistance Tolerance
- J = ±5 % (Use "J" for zero-ohm jumper)
- F = ±1 % (4 resistor pkg. and CAT16-F8)

Resistors
- 2 = 2 Isolated Resistors
- 4 = 4 Isolated Resistors
- 8 = 8 Isolated Resistors

Terminations
- LF = Tin-plated (RoHS compliant)

Packaging Size

J2 .... 0606 Package Size
F4, J4 .... 1206 Package Size
F8 .... 2406 Package Size for CAT16
J8 .... 2406 Package Size for CAT16; 1506 Package Size for CAY16

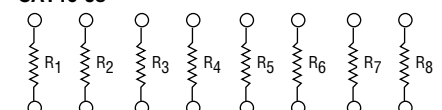For Standard Values Used in Capacitors, Inductors, and Resistors, click here.

Schematics

CAT16-J2
CAY16-J2

R_1 R_2

CAT16-F4, -J4
CAY16-F4, -J4

R_1 R_2 R_3 R_4

CAT16-F8, -J8
CAY16-J8

R_1 R_2 R_3 R_4 R_5 R_6 R_7 R_8

CAT/CAY 16 Series - Chip Resistor Arrays

BOURNS®

Derating Curve

Dimensions

Model	A	A'	B	C	D	E	F
CAT16-F4	0.40 ± 0.15 (.016 ± .006)	–	3.20 ± 0.20 (.126 ± .008)	0.80 ± 0.10 (.032 ± .004)	1.60 ± 0.20 (.063 ± .008)	0.50 ± 0.10 (.020 ± .004)	0.30 ± 0.15 (.012 ± .006)
CAT16-J4	0.40 ± 0.15 (.016 ± .006)	–	3.20 ± 0.20 (.126 ± .008)	0.80 ± 0.10 (.032 ± .004)	1.55 ± 0.25 (.061 ± .0098)	0.50 ± 0.10 (.020 ± .004)	0.30 ± 0.20 (.012 ± .008)
CAY16-F4, -J4	0.50 ± 0.15 (.002 ± .006)	0.70 ± 0.10 (.027 ± .004)	3.20 ± 0.20 (.126 ± .008)	0.80 ± 0.05 (.032 ± .002)	1.60 ± 0.20 (.063 ± .008)	0.50 ± 0.10 (.020 ± .004)	0.30 ± 0.20 (.012 ± .008)
CAT16-J2	0.40 ± 0.15 (.016 ± .006)	–	1.60 ± 0.15 (.063 ± .006)	0.80 ± 0.05 (.032 ± .002)	1.60 ± 0.15 (.063 ± .006)	0.60 ± 0.15 (.024 ± .006)	0.30 ± 0.20 (.012 ± .008)
CAY16-J2	–	0.60 ± 0.15 (.024 ± .006)	1.60 ± 0.15 (.063 ± .006)	0.76 ± 0.10 (.030 ± .004)	1.60 ± 0.15 (.063 ± .006)	0.45 +0.15/-0.10 (.018 +0.006/-0.004)	0.30 ± 0.20 (.012 ± .008)
CAT16-F8, -J8	0.40 ± 0.15 (.016 ± .006)	–	6.40 ± 0.20 (.252 ± .008)	0.80 ± 0.15 (.032 ± .006)	1.60 ± 0.20 (.063 ± .008)	0.60 ± 0.15 (.024 ± .006)	0.30 ± 0.20 (.012 ± .008)
CAY16-J8	0.30 ± 0.15 (.012 ± .006)	0.30 ± 0.15 (.012 ± .006)	3.80 ± 0.20 (.15 ± .008)	0.50 ± 0.05 (.02 ± .002)	1.60 ± 0.20 (.063 ± .008)	0.50 ± 0.10 (.02 ± .004)	0.30 ± 0.15 (.012 ± .006)

Configurations
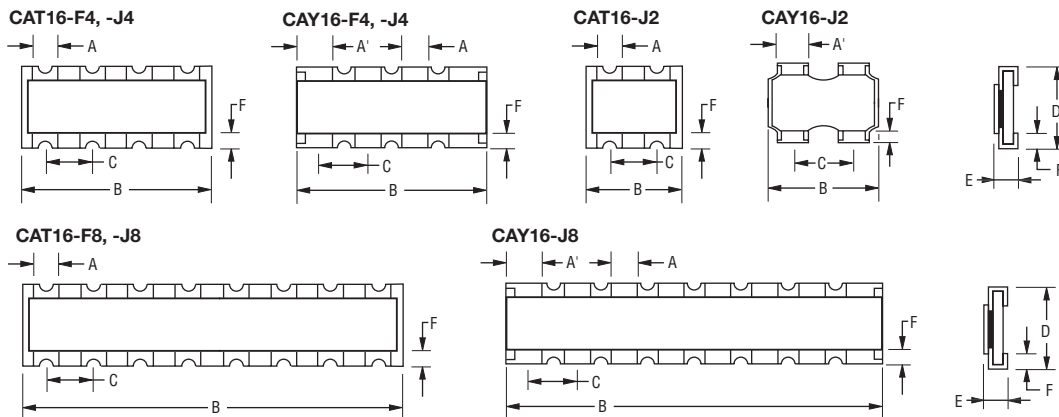
DIMENSIONS: $\frac{\text{MM}}{\text{(INCHES)}}$

CAT/CAY 16 Series - Chip Resistor Arrays

BOURNS®

Land Patterns

CAT16-F4, -J4, -F8, -J8   **CAY16-F4, -J4, -J8**   **CAT16-J2**   **CAY16-J2**

Model	a	b	p	f
CAT16-F4, -J4, -F8, -J8	0.7 to 0.9 (.028 to .035)	0.4 to 0.45 (.016 to .0178)	0.80 (.032)	2.2 to 2.6 (.087 to .102)
CAY16-F4, -J4	0.7 to 0.9 (.028 to .035)	0.4 to 0.45 (.016 to .0178)	0.80 (.032)	2.4 to 2.8 (.094 to .11)
CAY16-J8	0.7 to 0.9 (.028 to .035)	0.3 to 0.35 (.012 to .014)	0.50 (.020)	2.0 to 2.2 (.079 to .087)
CAT16-J2	0.7 to 0.9 (.028 to .035)	0.4 to 0.45 (.016 to .0178)	0.80 (.032)	2.2 to 2.6 (.087 to .102)
CAY16-J2	0.7 to 0.9 (.028 to .035)	0.4 to 0.5 (.016 to .020)	0.80 (.032)	2.0 to 2.6 (.079 to .102)

Packaging Dimensions

DIMENSIONS: MM (INCHES)
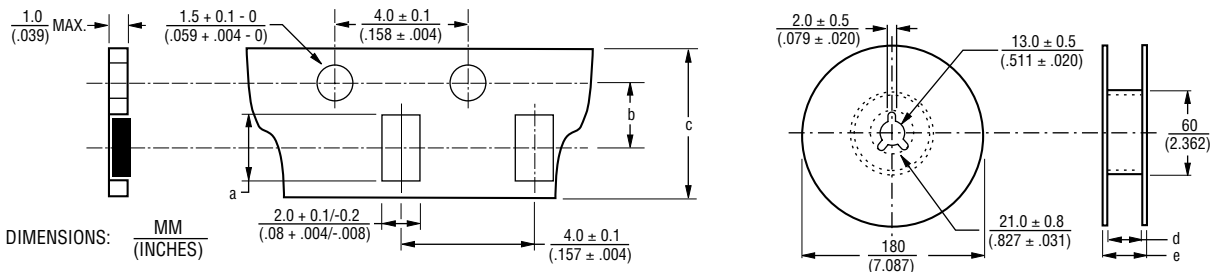
Model	a	b	c	d	e
CAT16-F4, -J4 & CAY16-F4, J4	3.60 ± 0.20 (.142 ± .008)	3.50 ± .005 (.138 ± .004)	8.0 ± 0.3 (.315 ± .012)	9.0 ± 0.3 (.354 ± .012)	11.4 ± 1.0 (.449 ± .040)
CAT16-J2 & CAY16-J2	1.80 ± 0.10 (.070 ± .004)	3.50 ± .005 (.138 ± .004)	8.0 ± 0.3 (.315 ± .012)	9.0 ± 0.3 (.354 ± .012)	11.4 ± 1.0 (.449 ± .040)
CAT16-F8, -J8	6.90 ± 0.20 (.272 ± .008)	5.50 ± 0.10 (.217 ± .004)	12.0 ± 0.2 (.472 ± .008)	13.0 ± 0.2 (.512 ± .008)	15.4 ± 1.0 (.606 ± .040)
CAY16-J8	4.10 ± 0.15 (.161 ± .012)	3.50 ± 0.05 (.138 ± .002)	8.0 ± 0.3 (.315 ± .012)	9.0 ± 0.3 (.354 ± .012)	11.4 ± 1.0 (.449 ± .040)

- 5,000 pcs. per reel (J2, J4, CAY16-J8)
  4,000 pcs. per reel (CAT16-F8, -J8)
- Paper tape