


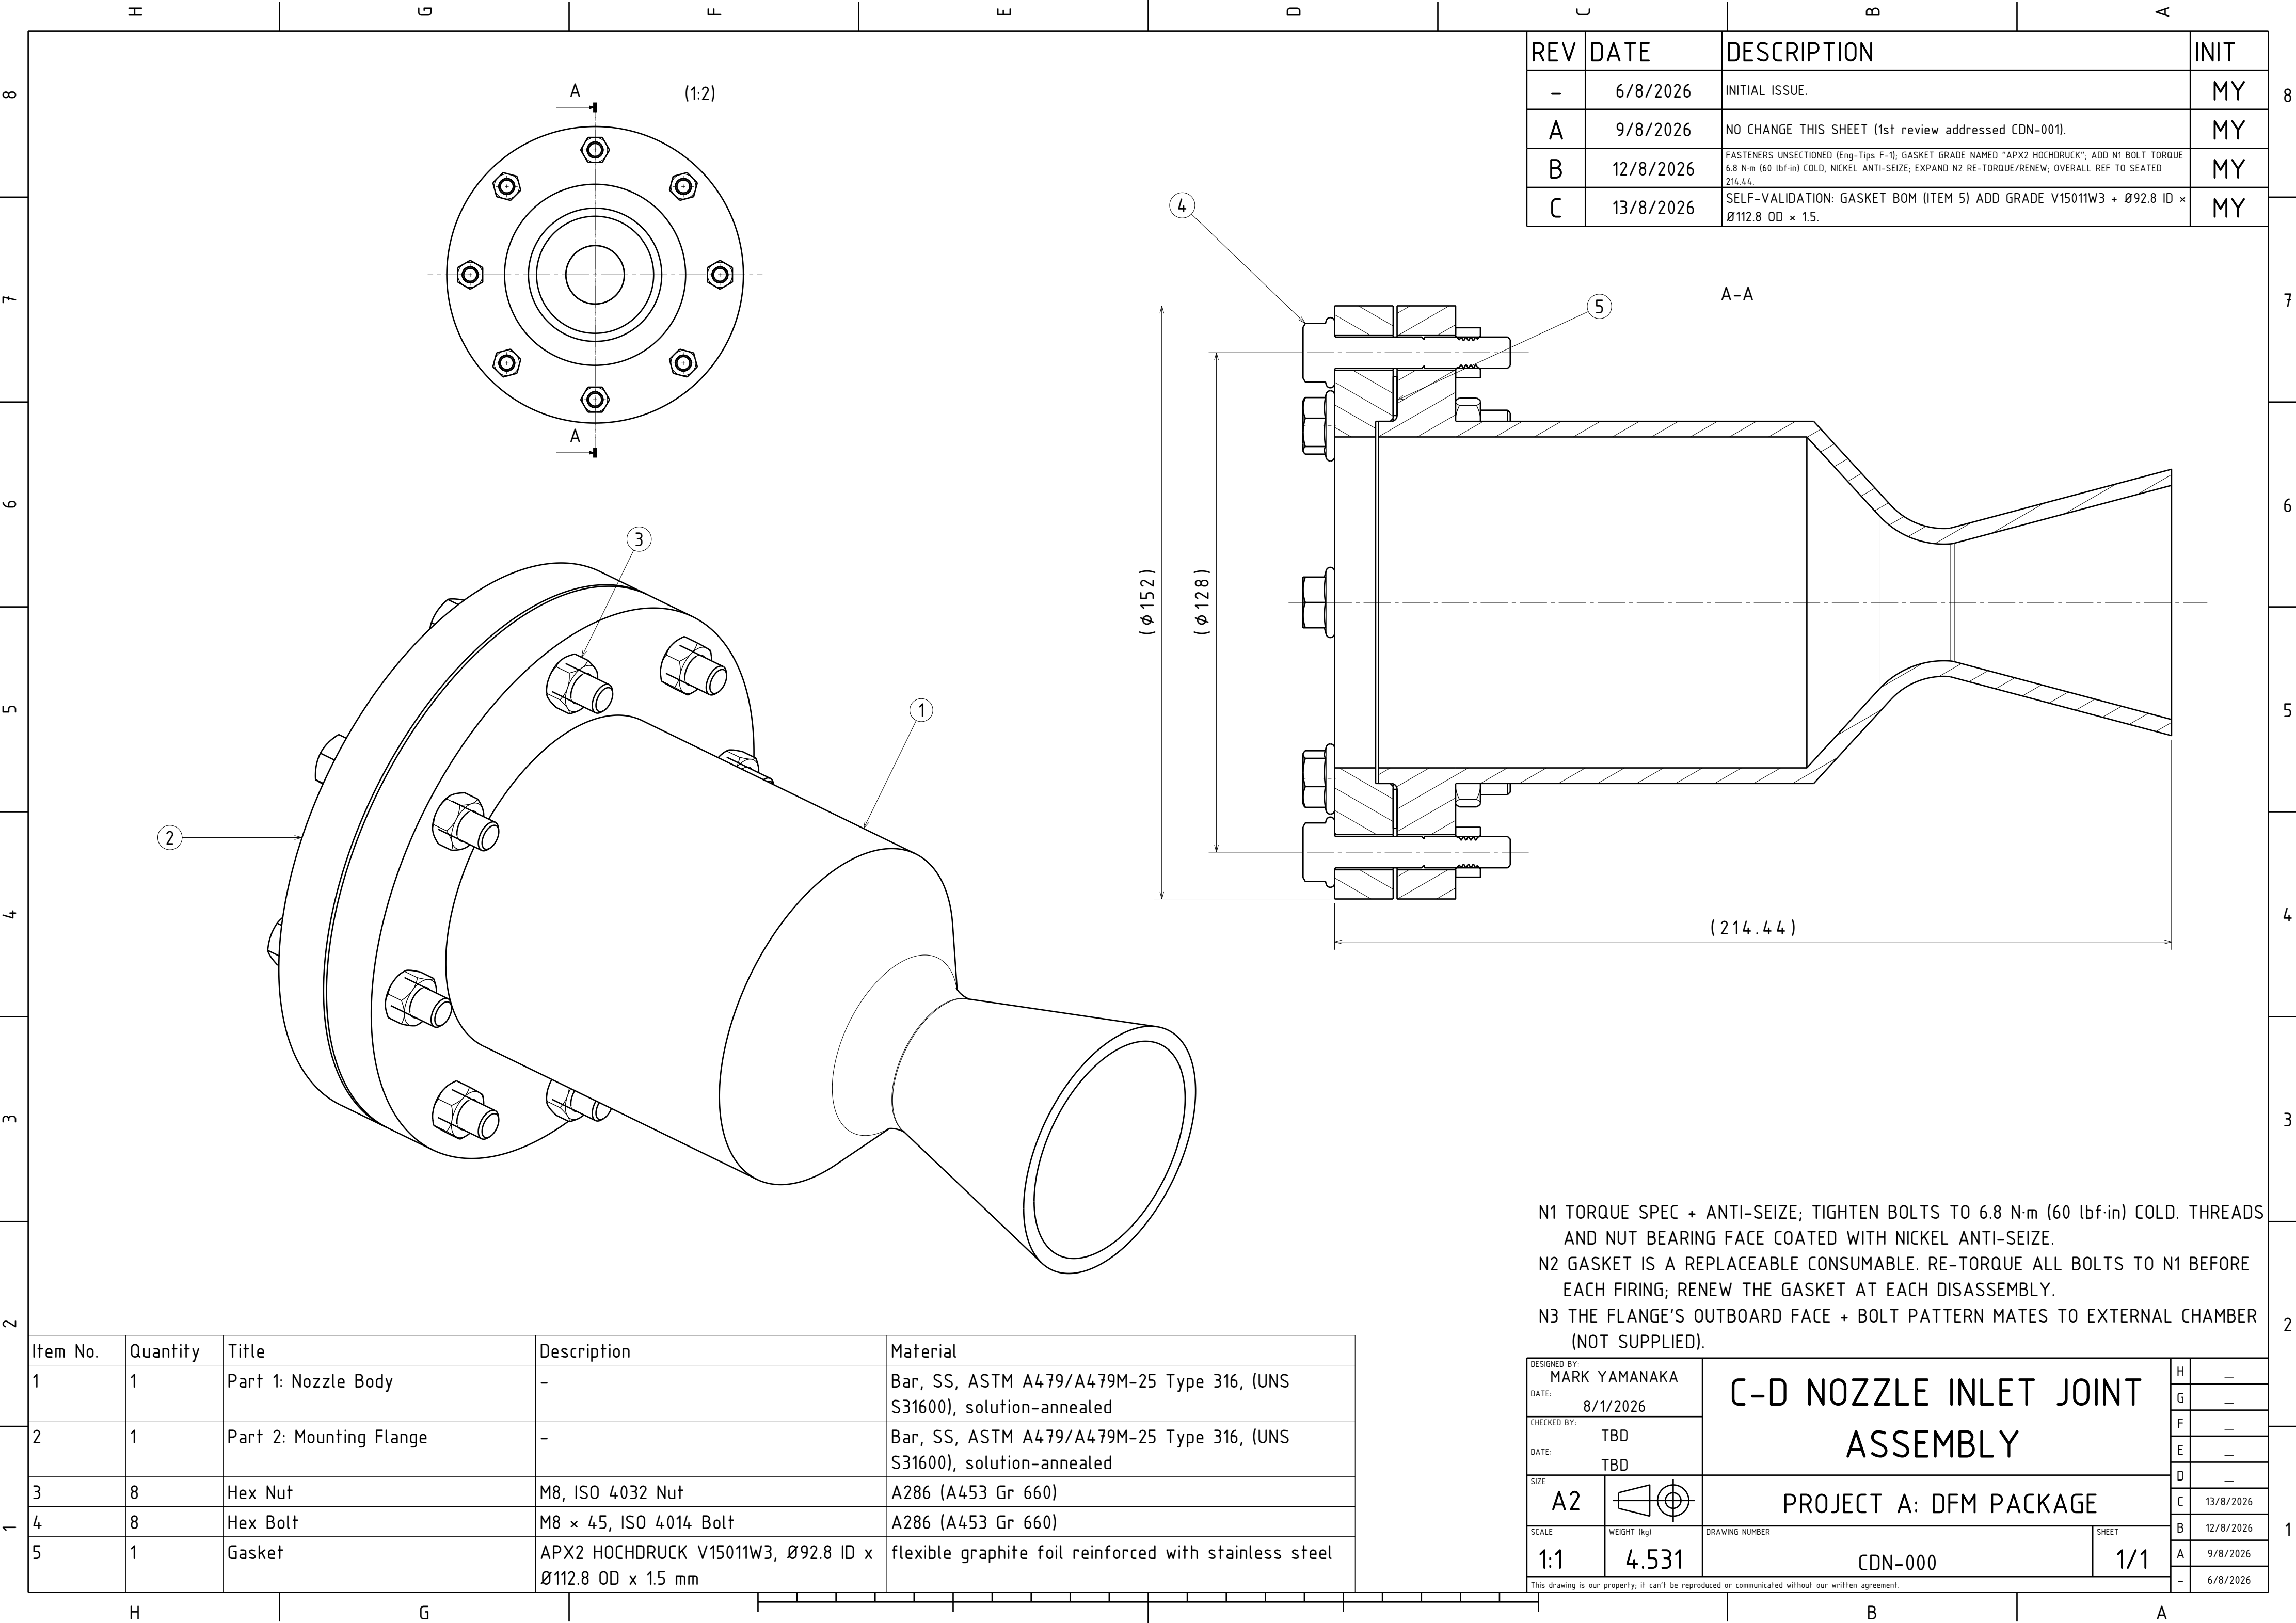

REV	DATE	DESCRIPTION	INIT
-	6/8/2026	INITIAL ISSUE.	MY
A	9/8/2026	NO CHANGE THIS SHEET (1st review addressed CDN-001).	MY
B	12/8/2026	FASTENERS UNSECTIONED (Eng-Tips F-1); GASKET GRADE NAMED "APX2 HOCHDRUCK"; ADD N1 BOLT TORQUE 6.8 N·m (60 lbf·in) COLD, NICKEL ANTI-SEIZE; EXPAND N2 RE-TORQUE/RENEW; OVERALL REF TO SEATED 214.44.	MY
C	13/8/2026	SELF-VALIDATION: GASKET BOM (ITEM 5) ADD GRADE V15011W3 + Ø92.8 ID × Ø112.8 OD × 1.5.	MY

Item No.	Quantity	Title	Description	Material
1	1	Part 1: Nozzle Body	-	Bar, SS, ASTM A479/A479M-25 Type 316, (UNS S31600), solution-annealed
2	1	Part 2: Mounting Flange	-	Bar, SS, ASTM A479/A479M-25 Type 316, (UNS S31600), solution-annealed
3	8	Hex Nut	M8, ISO 4032 Nut	A286 (A453 Gr 660)
4	8	Hex Bolt	M8 × 45, ISO 4014 Bolt	A286 (A453 Gr 660)
5	1	Gasket	APX2 HOCHDRUCK V15011W3, Ø92.8 ID x Ø112.8 OD x 1.5 mm	flexible graphite foil reinforced with stainless steel

N1 TORQUE SPEC + ANTI-SEIZE; TIGHTEN BOLTS TO 6.8 N·m (60 lbf·in) COLD. THREADS AND NUT BEARING FACE COATED WITH NICKEL ANTI-SEIZE.
N2 GASKET IS A REPLACEABLE CONSUMABLE. RE-TORQUE ALL BOLTS TO N1 BEFORE EACH FIRING; RENEW THE GASKET AT EACH DISASSEMBLY.
N3 THE FLANGE'S OUTBOARD FACE + BOLT PATTERN MATES TO EXTERNAL CHAMBER (NOT SUPPLIED).

DESIGNED BY: MARK YAMANAKA		C-D NOZZLE INLET JOINT ASSEMBLY		H	—
DATE: 8/1/2026				G	—
CHECKED BY: TBD				F	—
DATE: TBD				E	—
SIZE A2		PROJECT A: DFM PACKAGE		D	—
SCALE 1:1	WEIGHT (kg) 4.531			C	13/8/2026
DRAWING NUMBER CDN-000		SHEET 1/1		B	12/8/2026
This drawing is our property; it can't be reproduced or communicated without our written agreement.				A	9/8/2026
				—	6/8/2026