
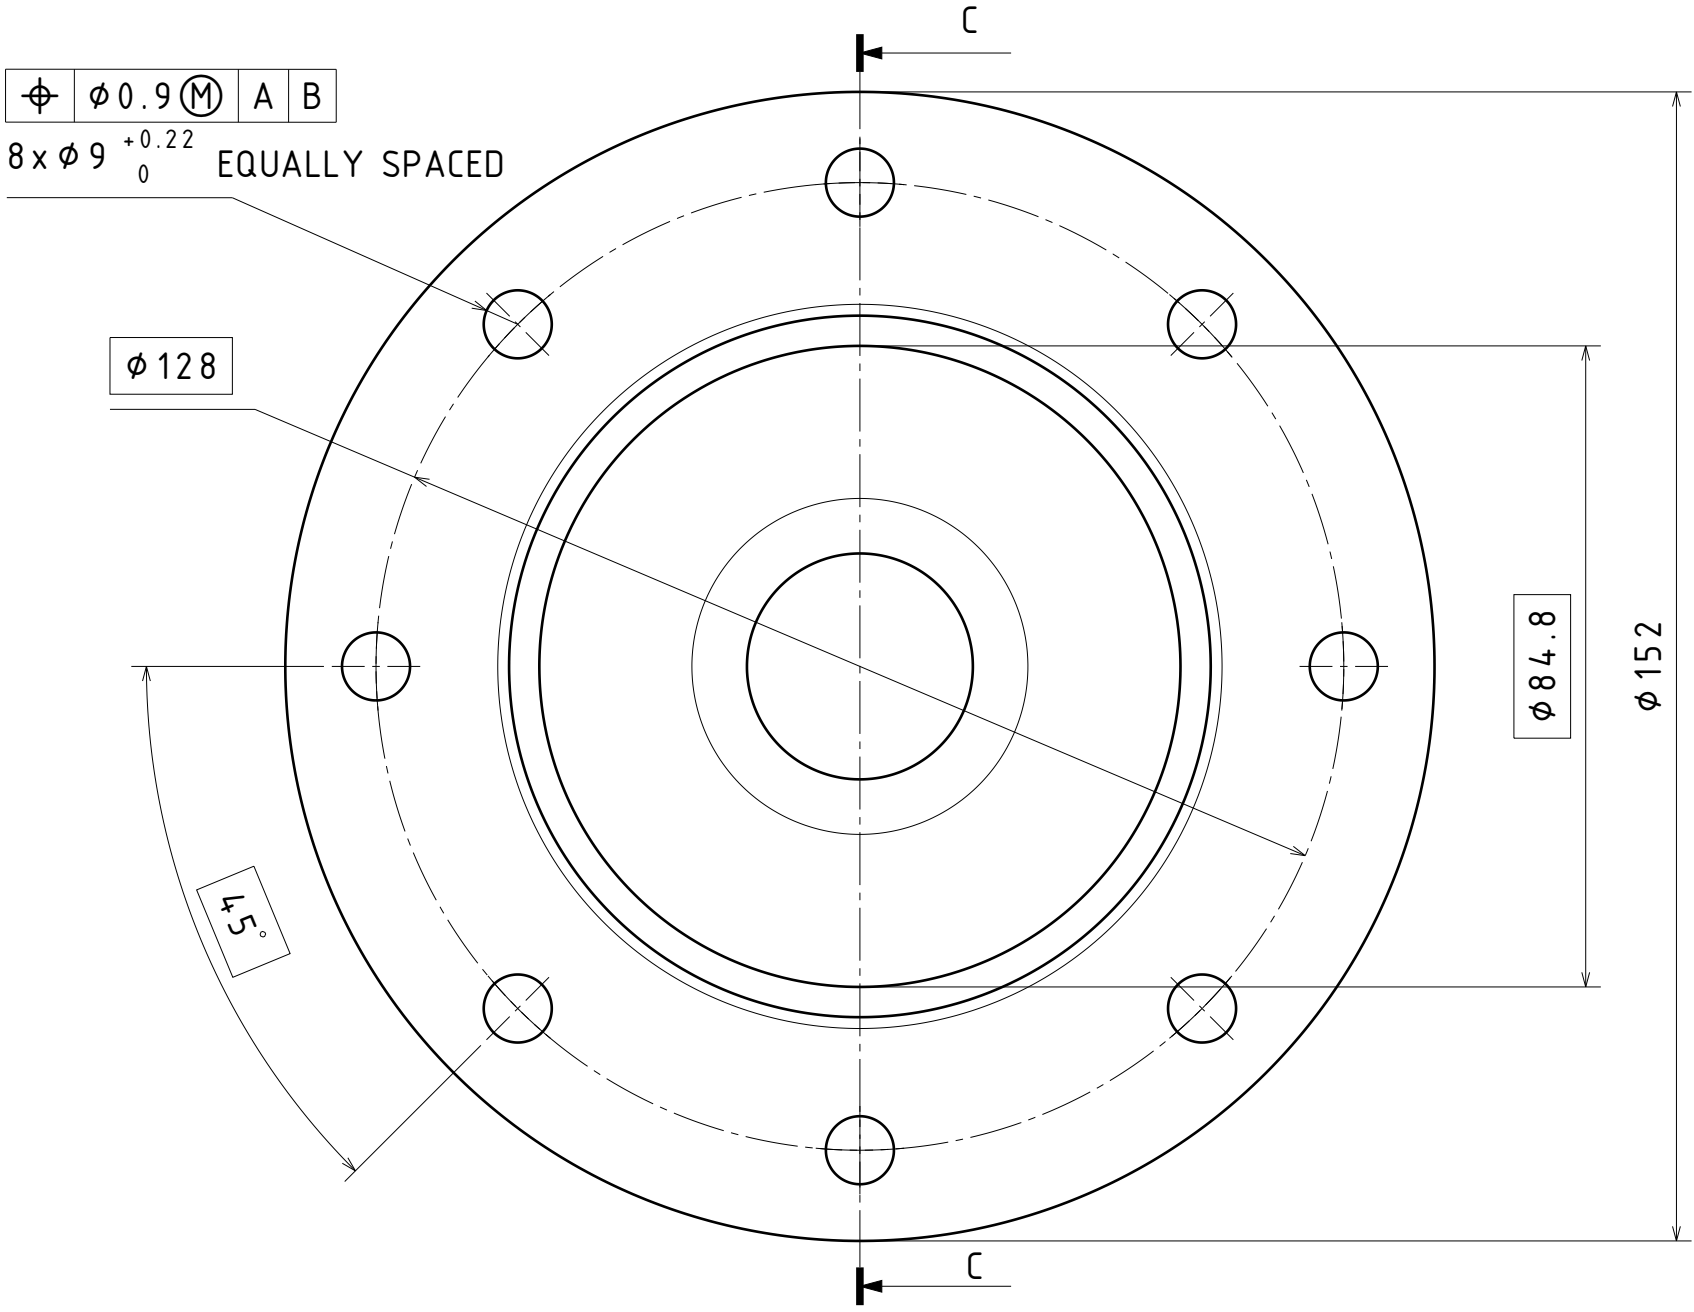
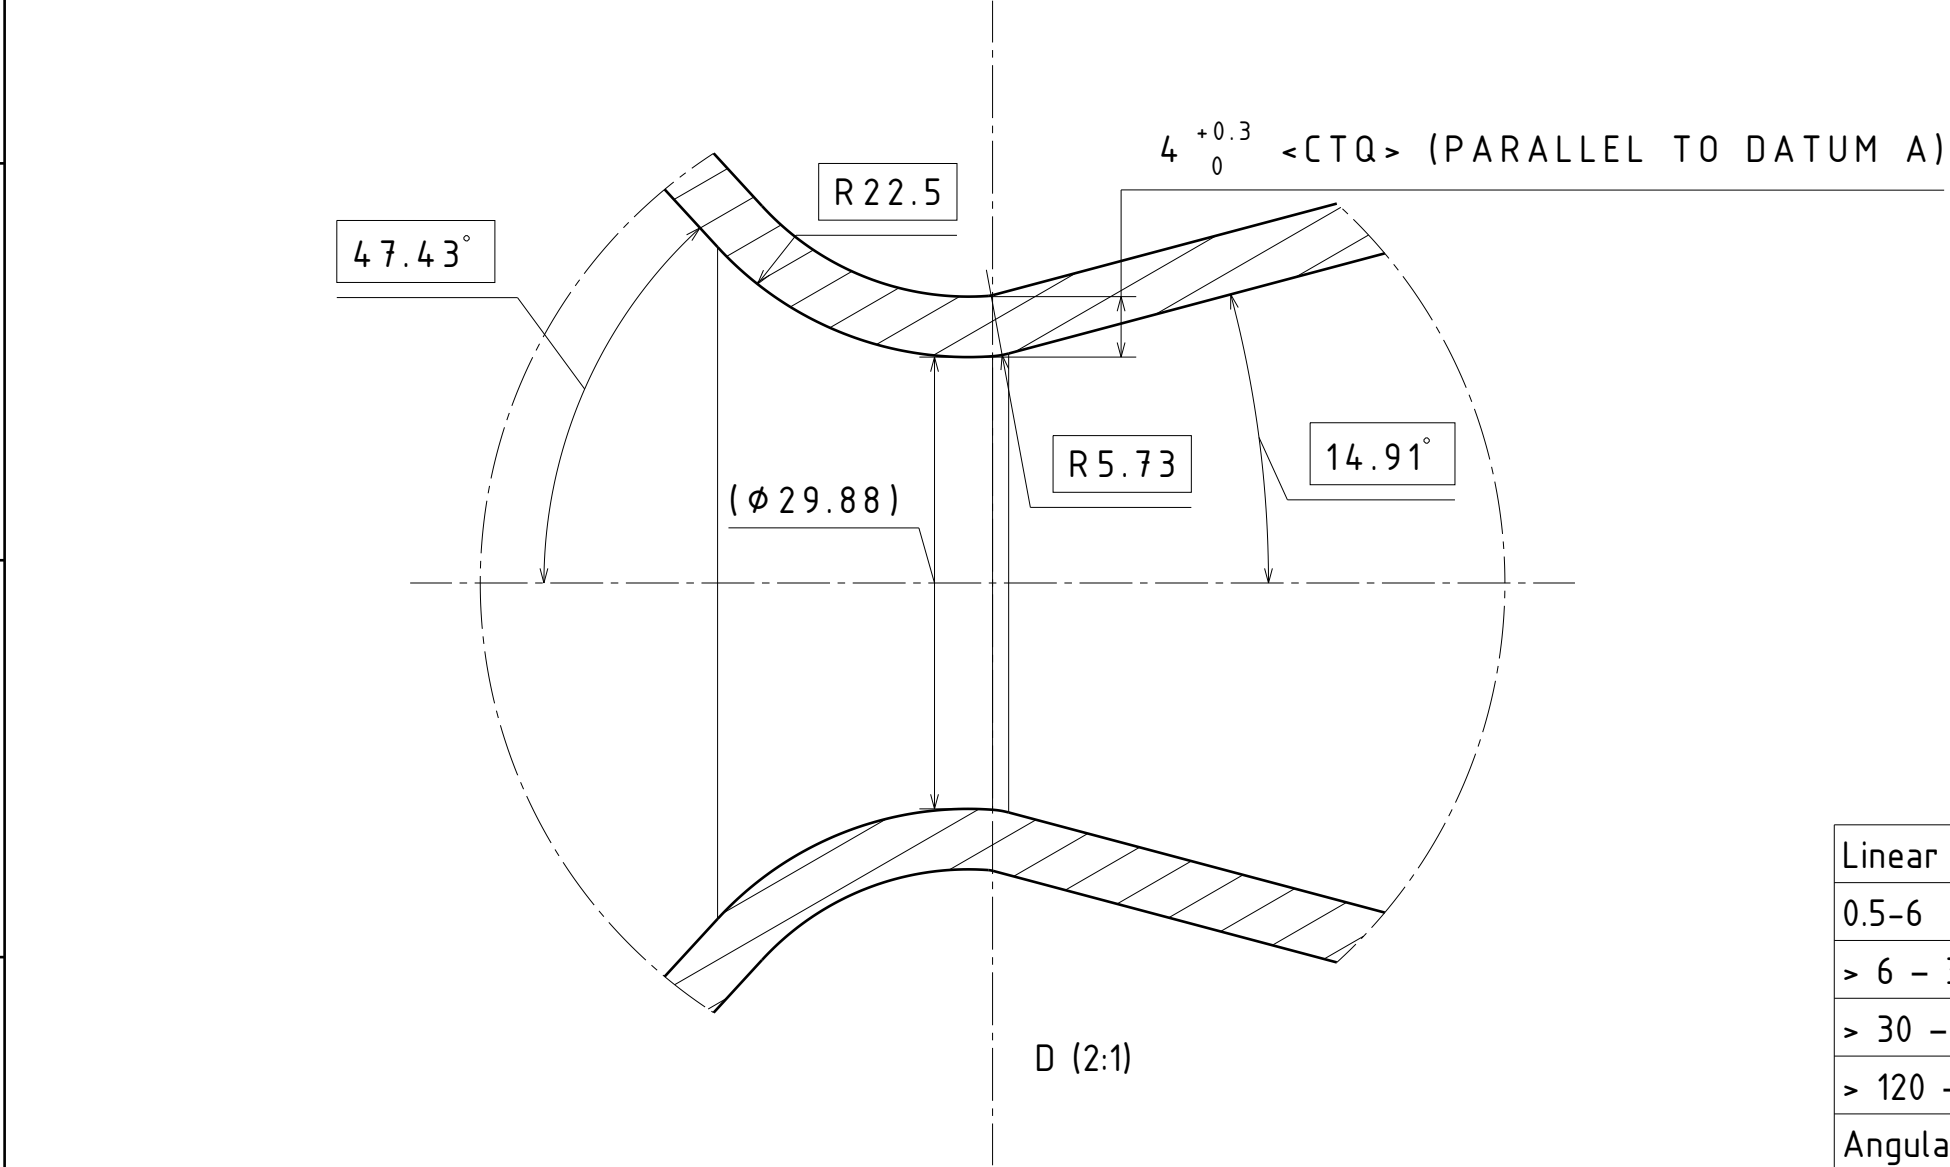
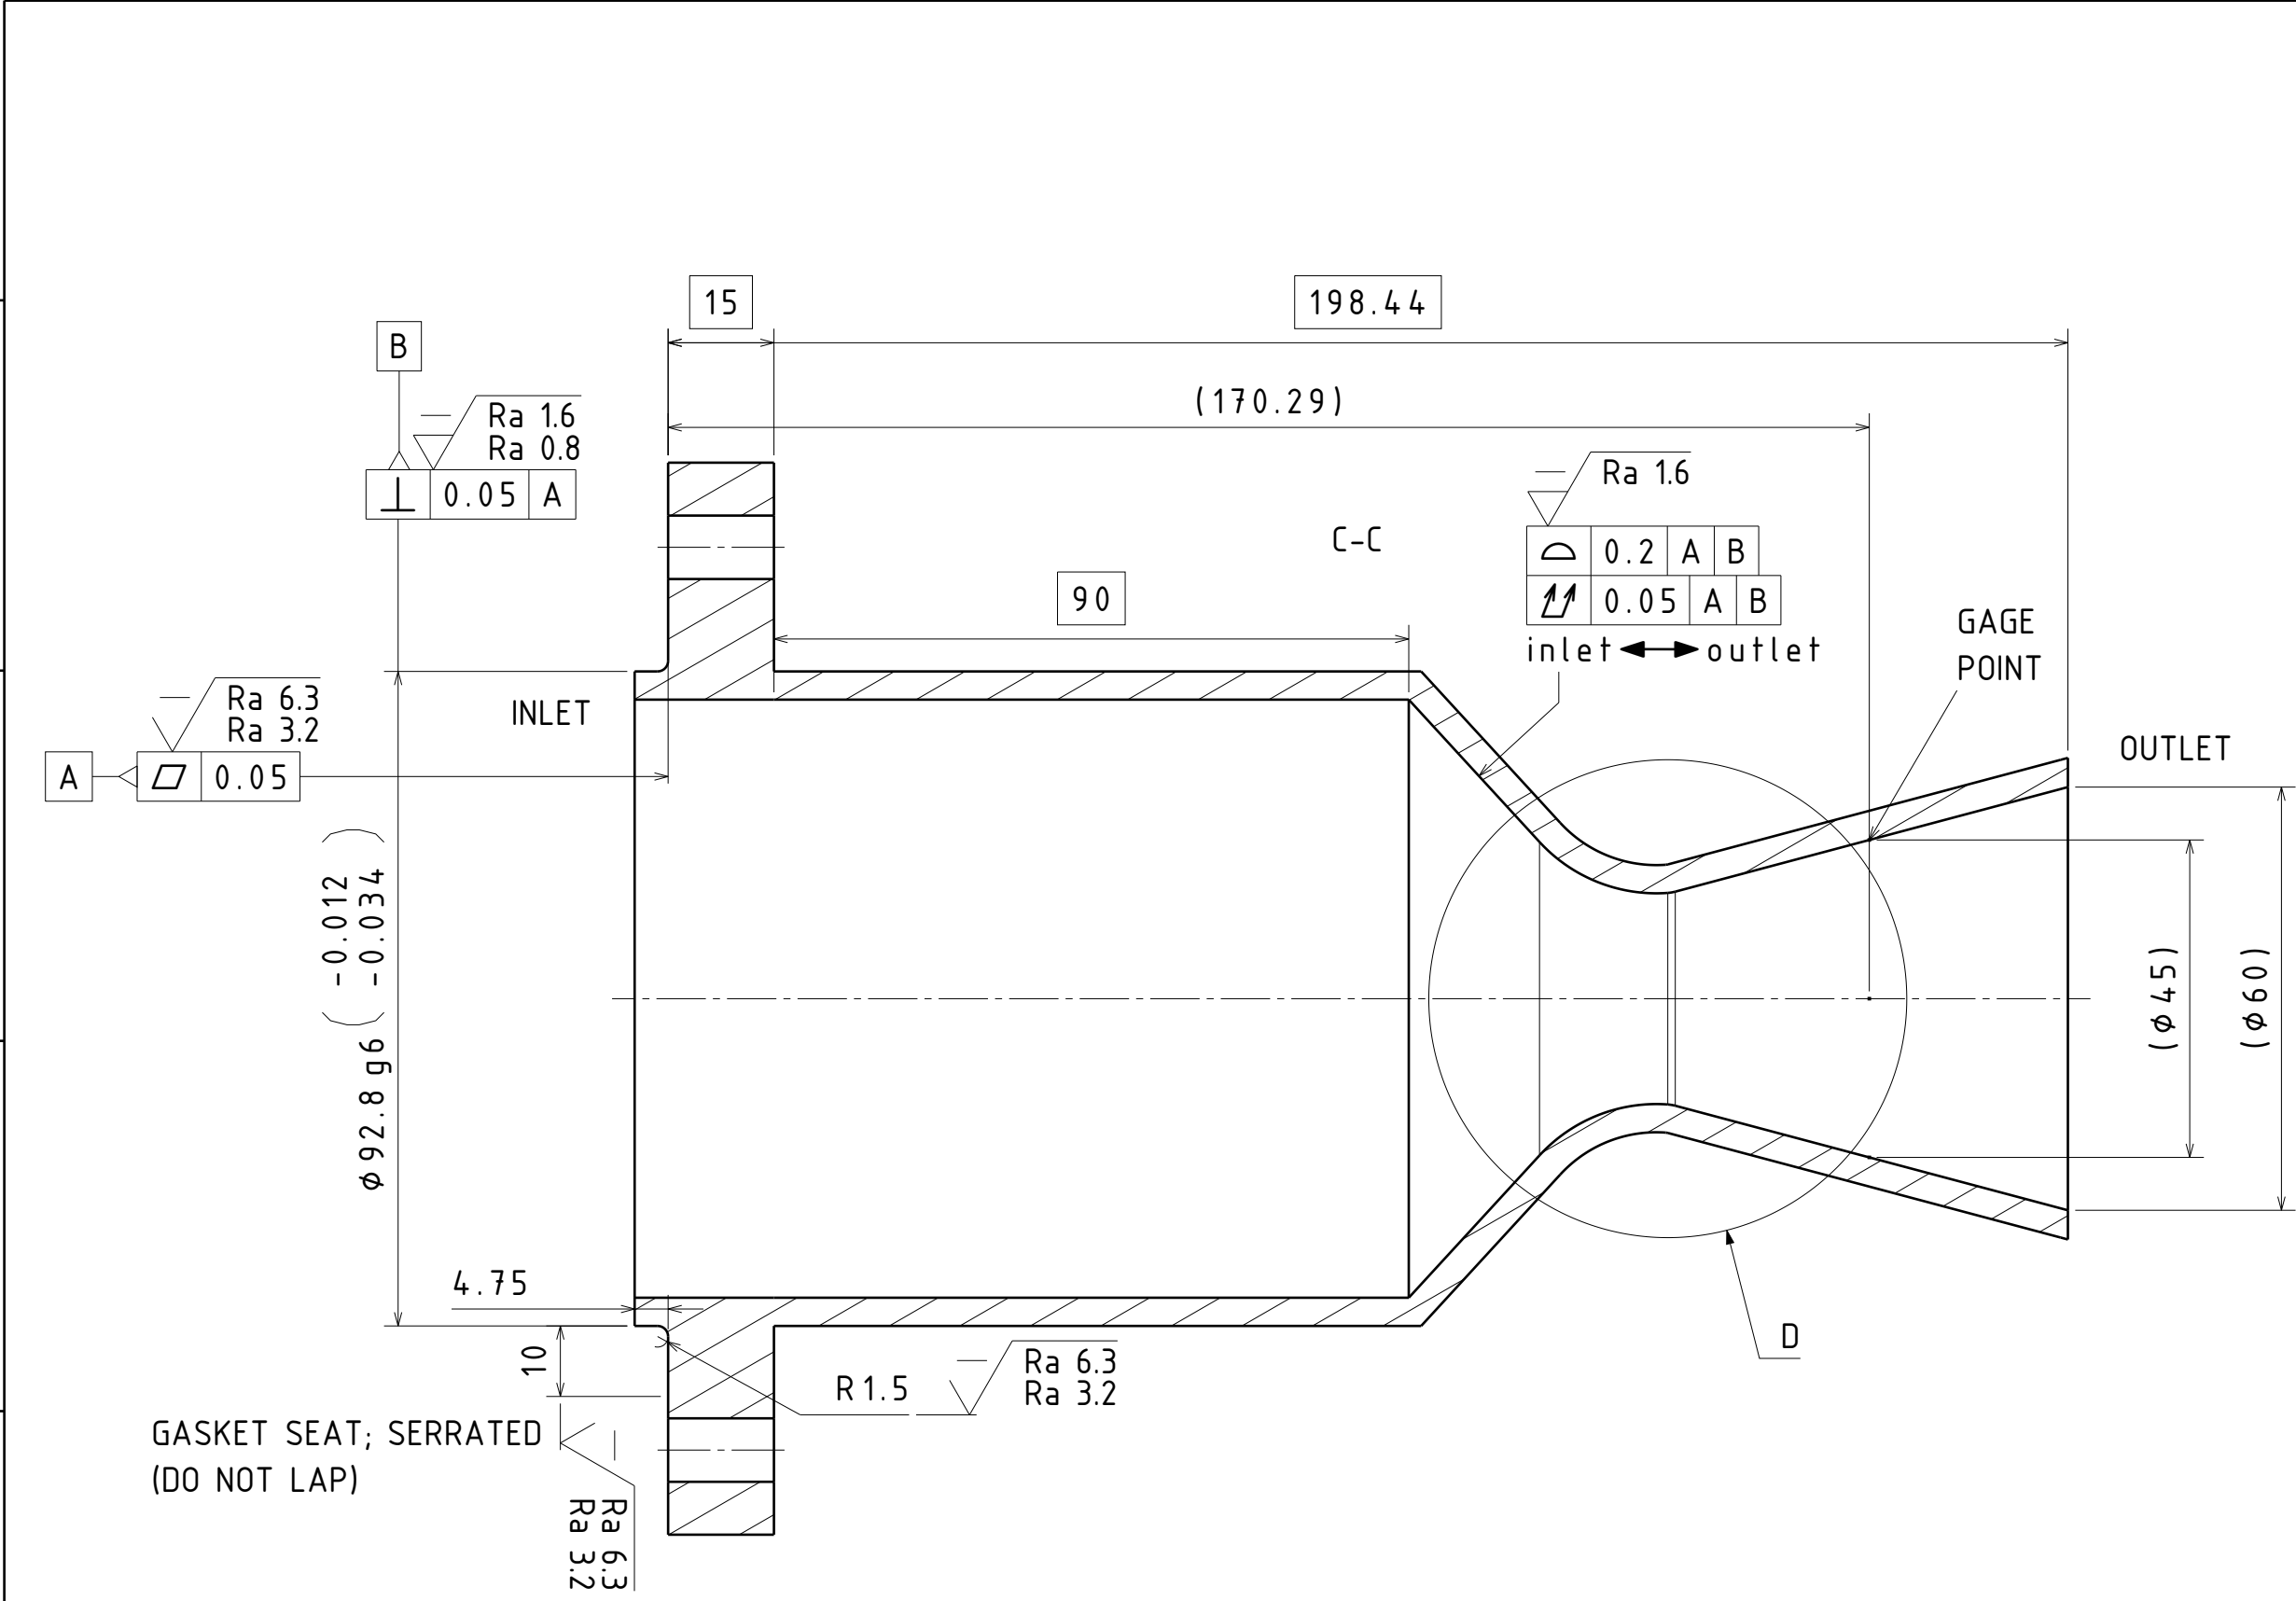




- N1 GEOMETRIC TOLERANCING PER ASME Y14.5-2018. RULE #1 (ENVELOPE PRINCIPLE) APPLIES.
- N2 DIMENSIONS IN MILLIMETRES. FIRST-ANGLE PROJECTION.
- N3 UNLESS OTHERWISE SPECIFIED, GENERAL TOLERANCES PER THE TITLE-BLOCK TABLE.
- N4 MATERIAL: BAR, STAINLESS STEEL, ASTM A479/A479M-25 TYPE 316, (UNS S31600), SOLUTION-ANNEALED CONDITION
- N5 SCOPE: SHORT-DURATION / GROUND-TEST FIRING ONLY.
- N6 INTERNAL AERODYNAMIC CONTOUR PER THE BASIC DIMENSIONS SHOWN, DERIVED FROM FROZEN MODEL; PROFILE $\Delta 0.2$ A|B APPLIES TO THE INTERNAL SURFACE, INLET TO OUTLET.
- N7 THROAT WALL THICKNESS IS CRITICAL-TO-QUALITY (CTQ): IT SETS THE PRESSURE-BOUNDARY MINIMUM-MATERIAL CONDITION, MUST SURVIVE CREEP AT THE THROAT OPERATING TEMPERATURE FOR THE FIRING DURATION, AND CARRIES THE MANUFACTURING MINIMUM THICKNESS. MINIMUM WALL SHALL BE PROTECTED.
- N8 EXTERNAL WALL 4 mm NOMINAL, OFFSET FROM INTERNAL CONTOUR, GENERAL TOLERANCE; THROAT WALL PER CTQ.
- N9 DATUM A = MATING/SEAL FACE. DATUM B = PILOT $\varnothing 92.80$ REGISTER.
- N10 SURFACE TEXTURE PER ASME B46.1. UNLESS OTHERWISE SPECIFIED, ALL MACHINED SURFACES Ra 3.2 μm MAX.
- N11 FITS PER ISO 286. CLEARANCE HOLES PER ISO 273.
- N12 GASKET AND FASTENERS ARE BOM ITEMS (NOT DETAIL-DRAWN).
- N13 REMOVE ALL BURRS AND SHARP EDGES.

Linear Dimension Range (mm)	± tolerance (mm)	DESIGNED BY: MARK YAMANAKA		C-D NOZZLE BODY	H	—
0.5-6	0.1	DATE: 7/30/2026			G	—
> 6 – 30	0.2	CHECKED BY: TBD			F	—
> 30 – 120	0.3	DATE: TBD			E	—
> 120 – 400	0.5	SIZE A2		PROJECT A: DFM PACKAGE	D	—
Angular (all)	± 0.5°	SCALE 1:1	WEIGHT (kg) 2.857		C	13/8/2026
Broken edges/max corner radius, unless noted	0.3	DRAWING NUMBER CDN-001			B	12/8/2026
				SHEET 1/1	A	9/8/2026
				- 6/8/2026		
This drawing is our property; it can't be reproduced or communicated without our written agreement.						

REV	DATE	DESCRIPTION	INIT
—	6/8/2026	INITIAL ISSUE.	MY
A	9/8/2026	INCRP. 1st EXTERNAL REVIEW (r-/Machinists): DATUM B FRAME ON $\varnothing 92.8$ FDS + $\perp 0.05$ A; $\varnothing 128$ BASIC BC, "8X $\varnothing 9$ EQUALLY SPACED"; POSITION $\varnothing 9$ (B) A B; CUTTING-PLANE LINE, SECT C-C, DETAIL D; "PARALLEL TO DATUM A I" ON 4 +0.3/0 CTQ; Ra RESTACKED + GENERAL-FINISH NOTE; REMOVE $\varnothing 91.76$; REDUCE HOLE DIMS.	MY
B	12/8/2026	INCRP. 2nd EXTERNAL REVIEW (Eng-Tips): N6 TO SINGLE BASIC AUTHORITY; 15 AND EXIT 198.44 TO BASIC, $\varnothing 60$ TO REFERENCE; GAGE POINT ($\varnothing 45$) at (170.29) REF; ADD N8 EXTERNAL-WALL NOTE, RENUMBER N8 TO N13; REMOVE (27.4)/(157.6) REFS.	MY
C	13/8/2026	SELF-VALIDATION: 8X $\varnothing 9$ UN-BOXED, ADD $\varnothing 9$ +0.22/0 (H13, ISO 273 MEDIUM); $\varnothing 152$ UN-BOXED (GENERAL TOL); N4 ADD "ASTM".	MY

This drawing is our property; it can't be reproduced or communicated without our written agreement.		DRAWING NUMBER		SHEET	
		1:1		1/1	