



Surface-relaxation estimator comparison ($R = 3.0 \mu\text{m}$, $D = 3.0 \mu\text{m}^2/\text{ms}$; $\rho R/D = 0.03$ in A, B)

A Per-collision cost: what each wall hit charges the magnetisation

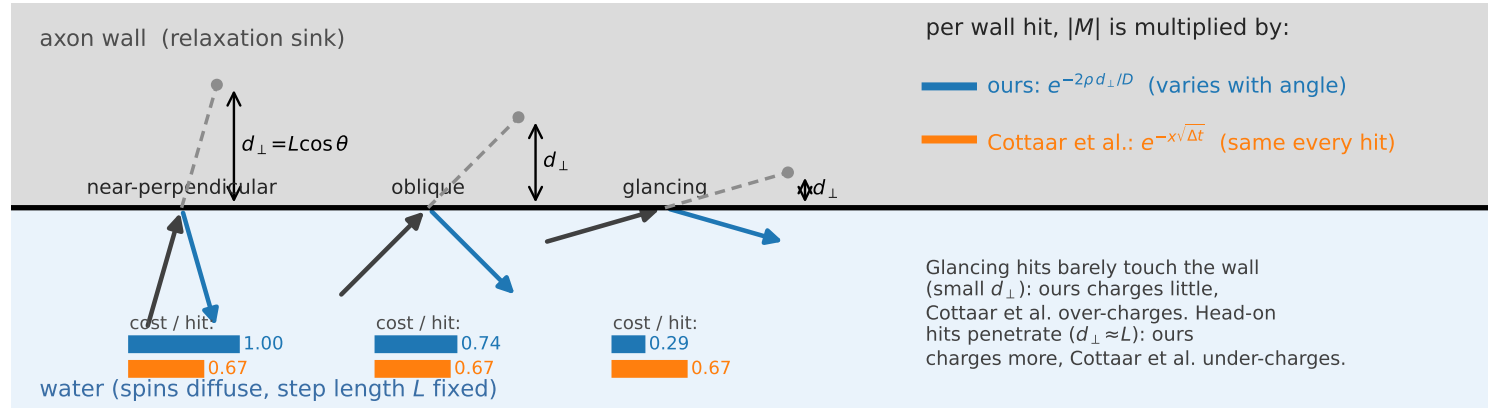

B Step-size robustness ($\rho R/D = 0.03$)

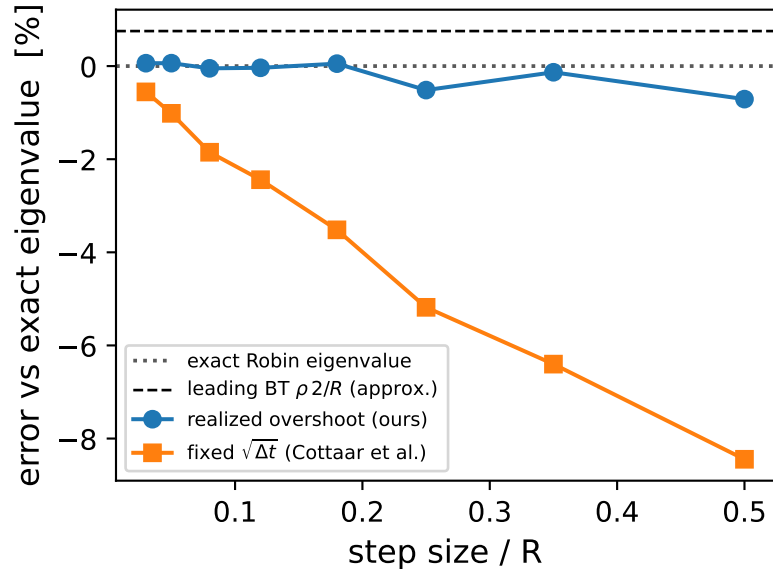

C Tracking the exact rate (fixed fine step)

