

First Observations of Beam Spin Asymmetries for K⁺

David M. Riser

June 2018

Contents

| | | |
|----------|---|-----------|
| 1 | Introduction | 5 |
| 2 | Experiment | 7 |
| 2.1 | CEBAF | 7 |
| 2.1.1 | Electron Injection & Polarization | 7 |
| 2.1.2 | Acceleration of Electrons | 9 |
| 2.2 | CLAS in Jefferson Lab Experimental Hall B | 11 |
| 2.2.1 | CLAS Torus and Drift Chambers | 12 |
| 2.2.2 | CLAS Cherenkov Counter | 13 |
| 2.2.3 | CLAS Time of Flight Scintillator | 13 |
| 2.2.4 | CLAS Electromagnetic Calorimeter | 14 |
| 3 | Basic Analysis & Corrections | 17 |
| 3.1 | Introduction | 17 |
| 3.2 | Luminosity Calculation | 17 |
| 3.3 | Determination of Good Run List | 20 |
| 3.4 | Helicity Determination | 20 |
| 3.5 | Vertex Corrections | 20 |
| 3.6 | Timing Corrections | 22 |
| 3.7 | Kinematic Corrections | 23 |
| 4 | Particle Identification | 29 |
| 4.1 | Introduction | 29 |
| 4.2 | Electron Identification | 29 |
| 4.2.1 | Electron ID Cuts | 29 |
| 4.3 | Hadron Identification | 36 |
| 4.3.1 | Hadron ID Cuts | 40 |

| | |
|---|-----------|
| 5 Beam Spin Asymmetry Analysis | 47 |
| 5.1 Introduction | 47 |
| 5.2 Event Selection and Binning | 47 |
| 5.3 ϕ_h Distributions | 49 |
| 5.4 Extraction of Modulations | 56 |
| References | 61 |

Chapter 1

Introduction

Protons and neutrons (nucleons) are spin-half fermions, which are bound states of QCD. Exactly how quarks and gluons dynamically combine to produce the net spin-half of the nucleon is not clear. Striking results of g_2 measurements performed by the European Muon Collaboration (EMC) in 1988 [1] demonstrated that only 30% of the spin of the nucleons can be attributed to quark spin. This result became known as the *proton spin crisis*, and remains largely unresolved. The understanding of quark orbital angular momentum in the nucleon, and its contribution to the proton spin, is now of vital importance.

Addressing the question of orbital angular momentum distributions of partons within nucleons necessitates moving beyond a co-linear picture of parton interactions. During the early 1990s, theoretical tools began to emerge that are now being used to study quark dynamics in three-dimensions. Transverse momentum dependent functions (TMDs) naturally extend the co-linear parton distribution functions (PDFs) to include intrinsic quark momentum in the plane transverse to the hard probe [2, 3].

Sadly, TMDs are not directly observable. Despite this fact, single spin asymmetry (SSA) measurements of semi-inclusive deeply inelastic scattering (SIDIS) have proved useful in recent years as inputs for phenomenological extraction of TMD parton distribution functions (TMD PDFs, sometimes just called TMDs) and TMD fragmentation functions (TMD FFs or simply FFs) [4–6]. Because of the absence of a TMD PDF, semi-inclusive annihilation of $e^+e^- \rightarrow h_1h_2X$ has been successfully used as a proxy for accessing the TMD FFs (add a reference the Prokudin’s extraction of Collins here).

By assuming single photon exchange and writing the QED interaction between the virtual photon and the nucleon as a generic vertex, then applying hermiticity, parity, and naive time-reversal invariance, the cross section for SIDIS can be written in a model independent way in terms of structure functions [2, 3].

$$\frac{d\sigma}{d\phi_h} \propto \sigma_0 \left[1 + A_{UU}^{\cos \phi_h} \cos \phi_h + A_{UU}^{\cos(2\phi_h)} \cos(2\phi_h) + \lambda A_{LU}^{\sin \phi_h} \sin \phi_h \right] \quad (1.1)$$

In this notation the coefficients A are referred to as moments, λ refers to the helicity state of the incoming lepton, and as is typical ϕ_h is the angle between the lepton and hadron scattering planes. Of particular interest to the present study is the $A_{LU}^{\sin \phi_h}$ moment which is predominantly composed of the structure function $F_{LU}^{\sin \phi_h}$. Due to the coupling of $A_{LU}^{\sin \phi_h}$ to the beam helicity, direct measurements of the ϕ_h dependence can be made by measuring the beam spin asymmetry.

$$A_{LU}^{\sin \phi_h} = \frac{d\sigma^+ - d\sigma^-}{d\sigma^+ + d\sigma^-} \quad (1.2)$$

The notation $d\sigma^\lambda$ refers to the helicity of the incoming lepton. Within the TMD framework, the structure function $F_{LU}^{\sin \phi_h}$ is a pure twist-three structure function.

$$F_{LU}^{\sin \phi_h} \propto \frac{M}{Q} \sum_a \left[h_L^{(a)} H_1^{\perp(a)} + g_{1L}^{(a)} \tilde{G}^{\perp(a)} + f_L^{\perp(a)} D_1^{(a)} + h_{1L}^{\perp(a)} \tilde{H}^{(a)} \right] \quad (1.3)$$

Boer Mulders h_1^\perp (leading order time-reversal odd TMD), g^\perp the twist-three time reversal odd TMD (higher twist analog of Sivers?), e is a chiral odd twist-three PDF (maybe the x^2 moment of e is related to transverse force acting on the transversely polarized quarks in unpolarized nucleon). As well as f_1 , the unpolarized.

Twist-three fragmentation functions \tilde{G}^\perp , \tilde{E} , and the Collins H_1^\perp as well as D_1 the unpolarized.

Chapter 2

Experiment

Jefferson National Lab houses the continuous electron beam accelerator facility (CEBAF) which is currently capable of providing 11 GeV electron beams to three experimental end stations, and 12 GeV to a fourth. The data that are analyzed in this study are from the run period E1-F, which occurred before the 12 GeV CEBAF upgrade, the details in this chapter describe the accelerator and CLAS detector at the time of the E1-F run period.

2.1 CEBAF

Proposed in 1982 and constructed between 1987-1997 the CEBAF accelerator at Jefferson lab was composed of a pair of linear accelerators and 9 recirculating arcs arranged in a racetrack shape [7?]. Originally designed to provide 4 GeV unpolarized electrons to three experimental halls, CEBAF was fitted with twin polarized electron guns, and upgraded to 6 GeV beam energy before the E1-F run period. CEBAF was built to provide an extremely high duty factor and an average beam current of up to $200 \mu A$.

2.1.1 Electron Injection & Polarization

CEBAF's injector provided 45 MeV electrons with 70%-80% average longitudinal polarization for the main accelerator. In order to provide an apparent continuous stream of events to the detectors, electron bunches were produced at a rate of $f = 1497 \text{ Mhz}$. To accommodate different requests for energy and beam current simultaneously, the injector produced three interspersed bunch trains at a frequency of $f/3 = 499 \text{ Mhz}$. The output beam energy $E = 45 \text{ MeV}$ was chosen so that injected electrons were *sufficiently relativistic*. In other words, when bunches of electrons at different energies simultaneously passed through the linear accelerators (LINACs), the relative phase difference (between different en-

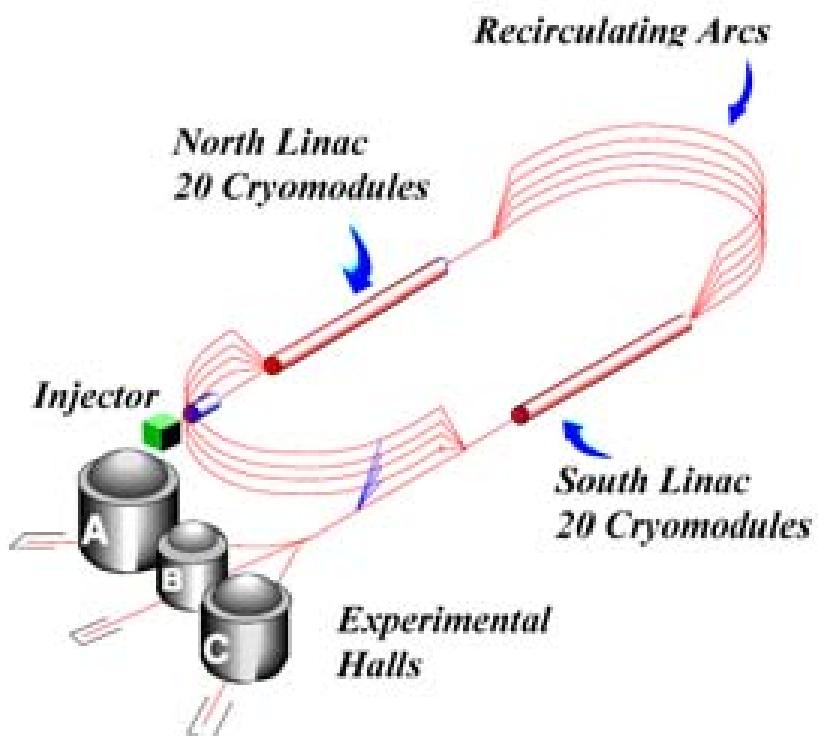


Figure 1: Layout of CEBAF.

Figure 2.1: Diagrammatic representation of CEBAF.

ergy bunches) accumulated over the distance remained less than 1° .

During early accelerator construction, the need for polarized electrons became apparent and the final polarized electron gun was produced in 2000. Production of polarized electrons was achieved by using twin polarized electron guns mounted at 15° with respect to the injector beam axis. Inside of each gun, electrons were liberated from gallium arsenide photo-cathodes by three independent diode lasers operated at a repetition rate of 499 Mhz . During polarized production, the diodes operated at a central wavelength of 850 nm . By manipulating the laser polarization using a Pockels cell, the electron beam spin is flipped at a rate of 60 Hz . Throughout the run period, an overall phase difference could be introduced by rotation of a wave-plate. As will be discussed in some detail later, changes in beam helicity due to wave-plate settings must be removed from the recorded data. The final output of the polarized electron guns produced an average longitudinal polarization of 70%-80%. After acceleration to 5 MeV the beam polarization was measured in the injector facility using a Mott polarimeter.

2.1.2 Acceleration of Electrons

The north and south LINACs were responsible for increasing the energy of the electrons from 45 MeV up to an impressive $\approx 5.7\text{ GeV}$ before delivery to the experimental halls A, B, and C. In order to achieve this each bunch of electrons passed through a total of 10 acceleration stages, 5 passes through each LINAC. The strong electric field needed to accelerate electron bunches was confined inside of superconducting 5-cell elliptical cavities. These cavities were machined from niobium, and operated at a temperature of 2.2° K . Developed at Cornell University, the cavities were operated at $1,500\text{ Mhz}$ with a gradient greater than 5 MV/m and a quality factor $Q_0 \geq 3 \cdot 10^9$ (the Q factor describes the monochromaticity of the cavity and is defined $Q_0 = f_0/\Delta f$). Each cavity was sealed inside of a cryo-unit, four such units were connected together to form an 8.5 meter cryo-module. Each LINAC was composed of 20 such cryo-modules connected together to increase electron energies by more than 500 MeV per pass.

The radio frequency (RF) that powers each cavity was sourced by water-cooled 5 kilowatt Klystrons located in groups of eight above each cryo-module. Phase locking of each cavity with a master oscillator ensures that the difference in phase between all cavities is less than one degree. The important super conductivity was maintained by circulation of liquid helium at 2.2° K produced at the on-site 5 kilo-watt helium liquefaction plant.

After re-circulation of five passes through each LINAC, full energy beams were delivered to the halls. Bunches were separated using an RF separator before entering their respective experimental



Figure 2.2: This aerial photograph contains annotations that show the accelerator path and the three experimental halls.

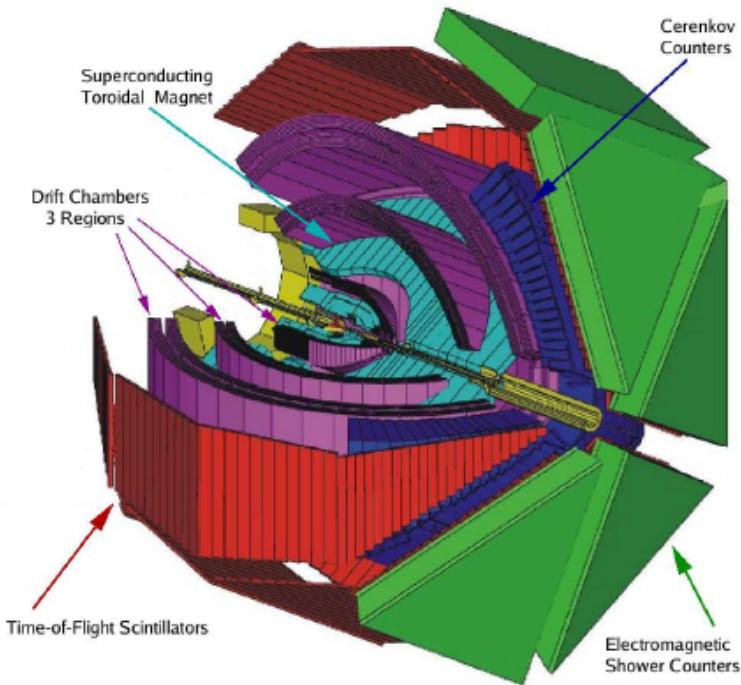


Figure 2.3: In this diagrammatic representation of CLAS, several important detector sub-systems are labeled.

halls. The beamline leading to the halls was also equipped with the ability to separate bunches before they complete five full passes delivering either three full energy beams, or two full energy beams and one lower, or one full energy beam and two of lower energy. This capability, combined with the flexible beam polarization and beam current provided by the injector ensured that each hall could experiment at it's desired settings simultaneously.

2.2 CLAS in Jefferson Lab Experimental Hall B

The CEBAF large acceptance spectrometer (CLAS), housed in Jefferson lab's Hall B, was used to record the E1-F dataset. Designed to detect particles over a very large angular range, the CLAS detector covered almost the full 4π solid angle around the target region. The detector was also designed to perform efficiently for particles with wide range of momena between 0.5 and 6.0 GeV. Overall detector design consisted of a large superconducting magnet that produced a toroidal field (this magnet was referred to as the torus), and six ideally identifcal *sectors*. Each sector of CLAS contained an identical set of sub-systems. After combining information from all sub-systems and running sophisticated reconstruction algorithms, complete events were able to be measured. This capability made CLAS unique in comparison with the arm style spectrometers of halls A and C. The major components of CLAS are listed below.

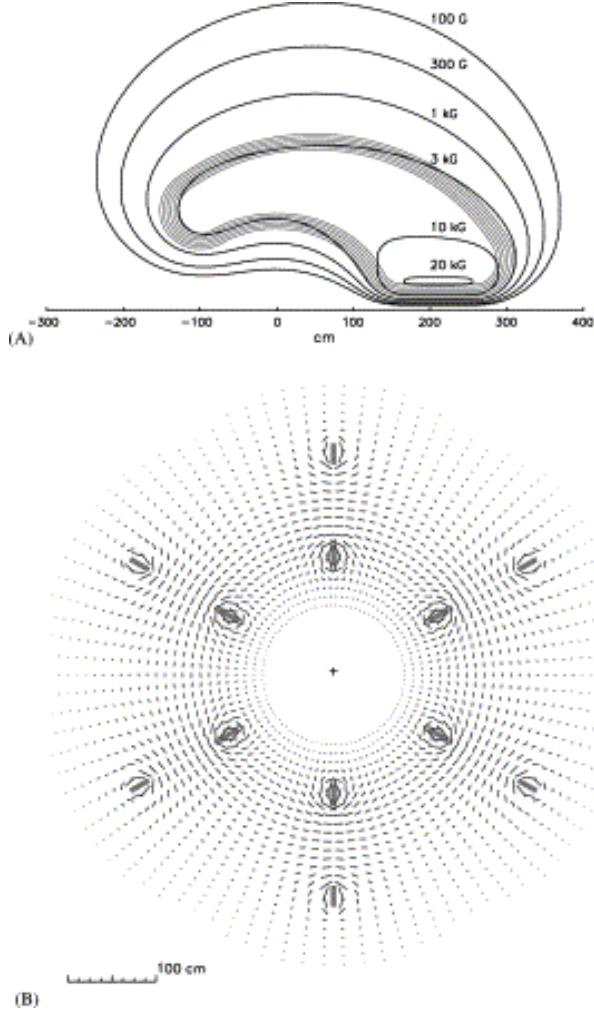


Figure 2.4: Diagrams of the CLAS torus field. This figure reproduced from [8]

2.2.1 CLAS Torus and Drift Chambers

Measuring the momentum of charged particles with $p > 200 \text{ MeV}/c$ was accomplished by measuring the curvature of the particle trajectory as it passed through the CLAS toroidal magnetic field. CLAS used six superconducting coils arranged 60° apart azimuthally around the beamline to create this strong field. The field produced, which varied from two tesla at lower angles to half a tesla at angles greater than 90° , curved charged particle trajectories in the θ direction without altering the azimuthal ϕ direction.

Spatially, the 18 drift chambers were divided up with six in each sector. In order to perform tracking before, inside, and after the torus three radially distinct drift chambers were constructed for each sector (these were called regions 1, 2, and 3). Each drift chamber consisted of 12 superlayers of hexagonal drift chamber cells. Angular measurements in the azimuthal direction were accomplished by offsetting the first six and last six superlayers by 6° . In total 35,148 individual drift chambers cells were used for tracking [9].

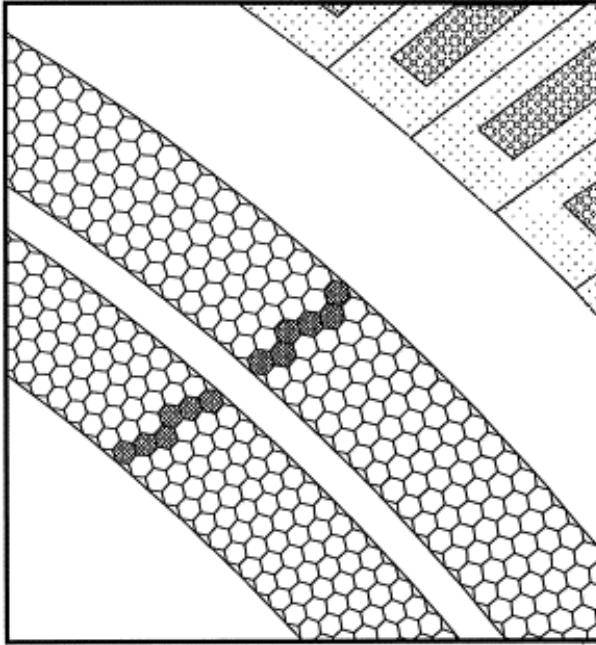


Figure 2.5: Illustration of a charged particle interacting with cells in the drift chamber. This figure was reproduced from [9]

2.2.2 CLAS Cherenkov Counter

Located behind (further downstream) the region 3 drift chambers, the Cherenkov counters (CC) greatly assisted in the separation of electrons and negatively charged pions for tracks with momentum less than the pion momentum threshold $p < p_\pi \approx 2.5 \text{ GeV}/c$ [8]. The CLAS CCs were divided into 6 sectors, like most other detectors. Each sector was divided into 18 segments in the polar angle θ away from the beamline. Furthermore, these segments are divided in half azimuthally to produce 12 half-sectors. Three mirrors, a light collecting Winston cone, a magnetic shield, and a 5 inch quartz face PMT were fitted to each of the 18 segments in all 12 half-sectors. During operation the CCs were filled with 6 m^3 each of C_4F_{10} gas. This sub-detector measured the number of photo-electrons produced for tracks between $8^\circ < \theta < 45^\circ$.

2.2.3 CLAS Time of Flight Scintillator

Measurements of velocity can be made by simply knowing the distance some object has in a given time period. Operating on this principle the CLAS time of flight (TOF) system allowed for the separation of π and K for momentum $p \leq 2\text{GeV}/c$. Constructed of 57 scintillating bars per sector, the TOF system covered an impressive area of 206 m^2 and spanned range $8^\circ \leq \theta \leq 142^\circ$. Each of the scintillating bars measured 5.08 centimeters in thickness, 15 or 22 centimeters in width, and measured between 32 and 450 centimeters in length. Shorter bars, which covered the relatively higher rate low scattering angle, were built with an intrinsic timing resolution of just 80 picoseconds. The timing resolution for longer

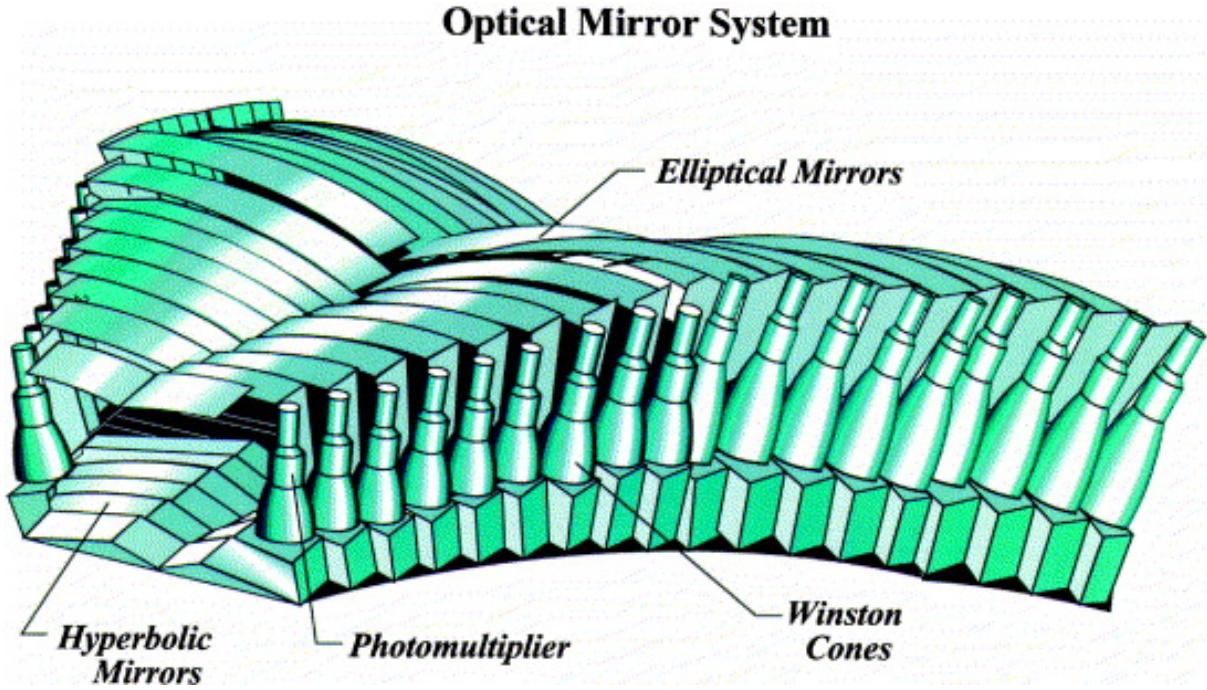


Figure 2.6: The CLAS Cherenkov Counter.

bars was designed to be 160 picoseconds, and measurements performed after the detector construction showed that the average timing resolution over the detector was 163 picoseconds [10].

During experiments where the electron beam was used, the start time for each event could be assigned by assigning $\beta = 1$ to the fastest electron measured in the final state. However, once the tagger magnet was powered on and photon beam was delivered on target, start time information came from the start counter. Originally designed with six counters, the start counter was constructed with three counters spanning the full angular range of the detector. The target was surrounded by these three thin scintillators which had sufficient resolution to determine the difference between two sequentially arriving bunches ($\sigma \approx 350 \text{ ps}$).

2.2.4 CLAS Electromagnetic Calorimeter

The outermost layer of the CLAS detector was the electromagnetic calorimeter (EC). This sampling calorimeter was a main component of the CLAS trigger and had several important roles. Foremost, the EC detected and triggered on electrons with $E > 0.5 \text{ GeV}$. Detecting neutral particles such as photons and neutrons were secondary and tertiary roles. By detecting photons with energies higher than 200 MeV, and having sufficient granular resolution, strongly decaying (π^0 or η) $\rightarrow \gamma\gamma$ particles were measured. Separation of neutrons and photons was achieved by combining information from the EC with timing information from the CLAS time of light system [11].

Structurally, the EC was composed in total of 1296 PMTs and 8424 scintillating strips in the six EC modules (one per sector). Alternating layers of lead and scintillator material were used to create a

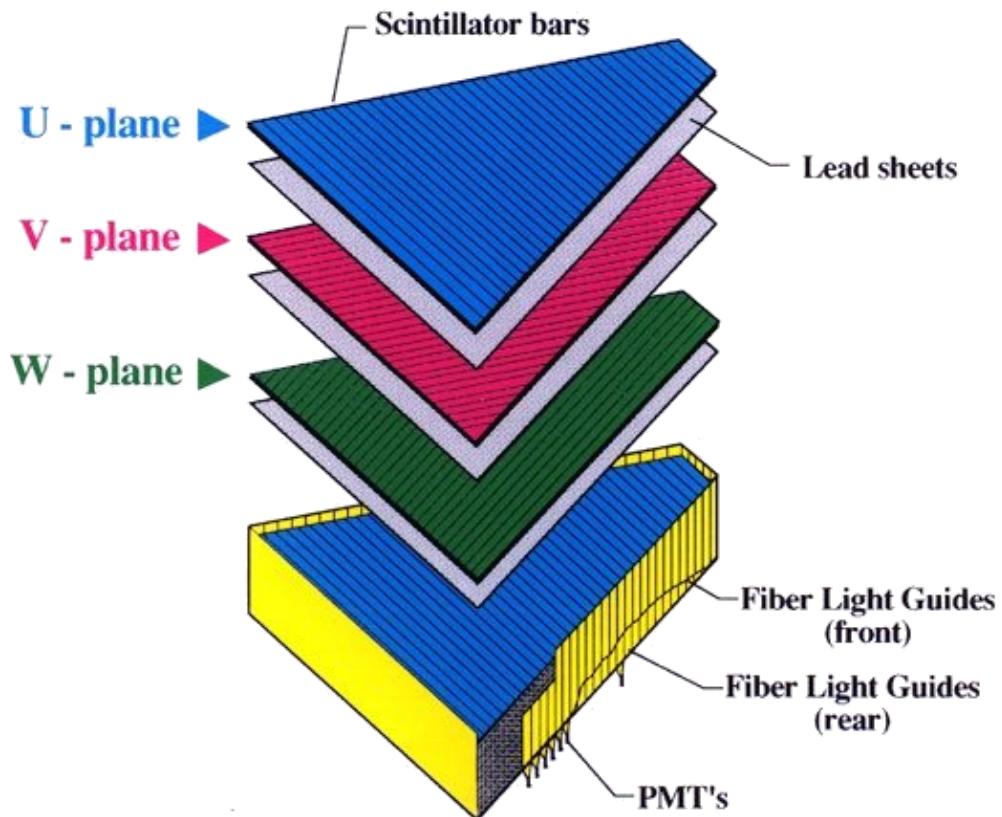


Figure 2.7: The U, V, W structure of CLAS electromagnetic calorimeter is shown above.

sampling fraction of approximately one-third for electrons. Measuring just 10 mm thick, and with a width of 10 cm (to balance cost of PMTs and granularity), the length of the scintillating strips depended on the angular location. Each EC module contained 3 sets of 13 layers offset by 120° to provide spatial information, these layers were referred to as U, V, and W.

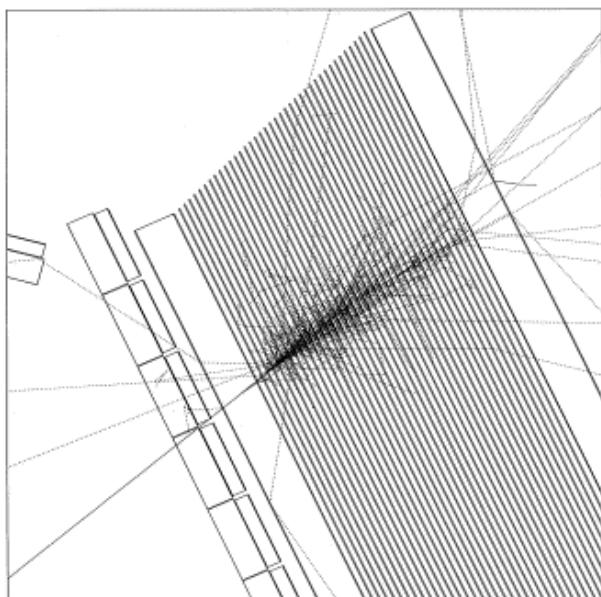


Figure 2.8: GEANT simulation of an electron showering in the EC. This figure originally appeared in [11]

Chapter 3

Basic Analysis & Corrections

3.1 Introduction

This chapter discusses analysis procedures that are common to the subsequent data analyses of pions and kaons. These procedures can be divided into two groups. The first type of basic analysis described is the aggregation or calculation of scalar values over the run-period (examples include luminosity and helicity). The second type of analysis procedure described is a correction to measured values. Vertex corrections, timing corrections, and kinematic corrections will be discussed.

3.2 Luminosity Calculation

A useful concept in accelerator/collider physics is the luminosity \mathcal{L} . Luminosity is defined as the number of collisions per unit area per unit time that could lead to some process of interest. Consider as an example elastic scattering of electrons from protons, the luminosity is the number of electron-proton collisions per unit time per unit area. The rate $\frac{dN}{dt}$ of the occurrence of events for some process X can be written in terms of this luminosity and the cross section for the process.

$$\frac{dN_X}{dt} = \mathcal{L}\sigma_X \quad (3.1)$$

For the fixed target case, the luminosity has a simple expression.

$$\mathcal{L} = \frac{j_e \rho_p l_T}{e} \quad (3.2)$$

Here l_t is the target length, ρ_p is the proton number density in the target, and j_e is the beam current. To find the total number of events which accumulate in some time t_{exp} the event rate is integrated with respect to time.

$$N_X = \int_0^{t_{exp}} \frac{j_e \rho_p l_T}{e} \sigma_X dt = \frac{\rho_p l_T}{e} \sigma_X \int_0^{t_{exp}} j_e dt = \frac{\rho_p l_T}{e} \sigma_X \Delta Q \quad (3.3)$$

Thus the experimentally observed cross section for some process X is,

$$\sigma_X = \frac{N_X}{\mathcal{L}_{int}} \quad (3.4)$$

where the number of events N_X is corrected for all effects and \mathcal{L}_{int} is the integrated luminosity as shown above.

Experimentally, the factor ΔQ can be calculated from charge deposition measurements by the Faraday cup. The Faraday cup charge is a scalar value written periodically into the output event stream, not with every recorded event. This information is stored in the output BOS files in a bank called TRGS, the variable is named FCUP_G2.

For this data analysis, the final ntuple (root files) used did not contain the Faraday cup charge information. For this reason, the authors used the BOS files directly and recorded the value of FCUP_G2 for every scalar reading, as well as the event number directly after each scalar entry (from the HEAD bank). This event number correlates directly to the event number stored in the root files used for analysis.

The total accumulated charge over a run is simply the sum over consecutive differences in the Faraday cup charge.

$$\Delta Q = \sum_{i=1}^{n-1} q[i+1] - q[i] \quad (3.5)$$

Here n denotes the number of scalar entries for a given file. Due to the periodic nature of the scalar bank writing events are also recorded after the last reading of the file, and before the first scalar reading of the next file in the run. To account for this the difference between consecutive files last and first readings is added to the total.

For the E1-F dataset, a run typically contains around 20 files, each representing a raw file size of 2 gigabytes. These files are named by run number, and given an index from 0 to $n_{files} - 1$. It is not uncommon that a run will contain missing files in the middle of the range. If this occurs, the charge difference between last/first reading is not added to the total.

Any charge which accumulates in a period of time where the number of events did not change is not

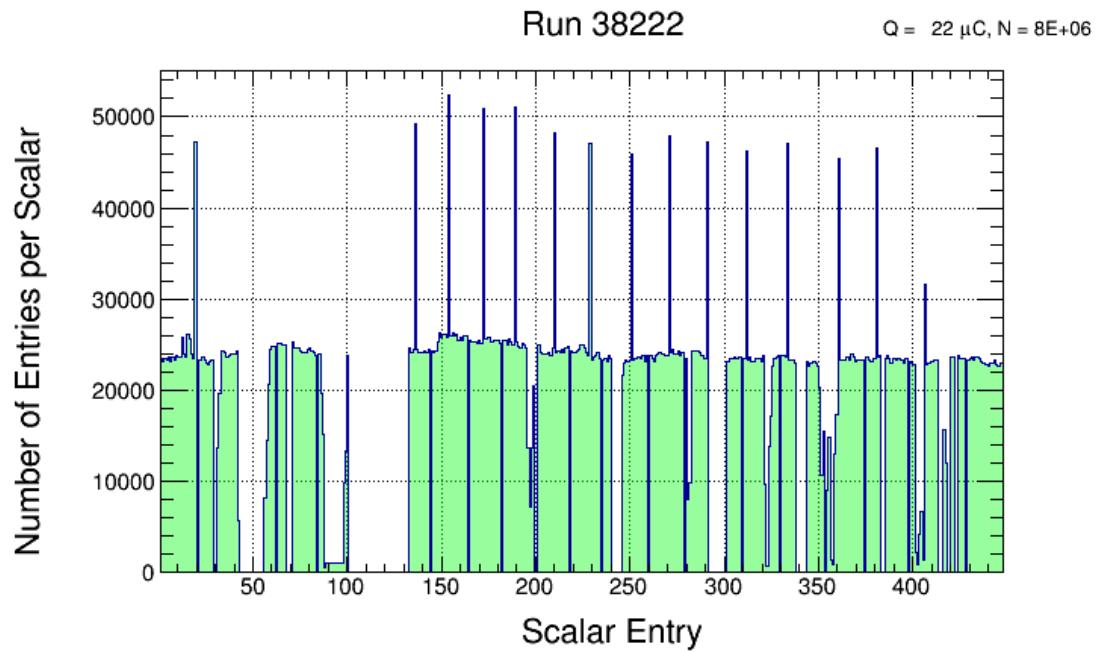


Figure 3.1: Entries per scalar reading for run 38222.

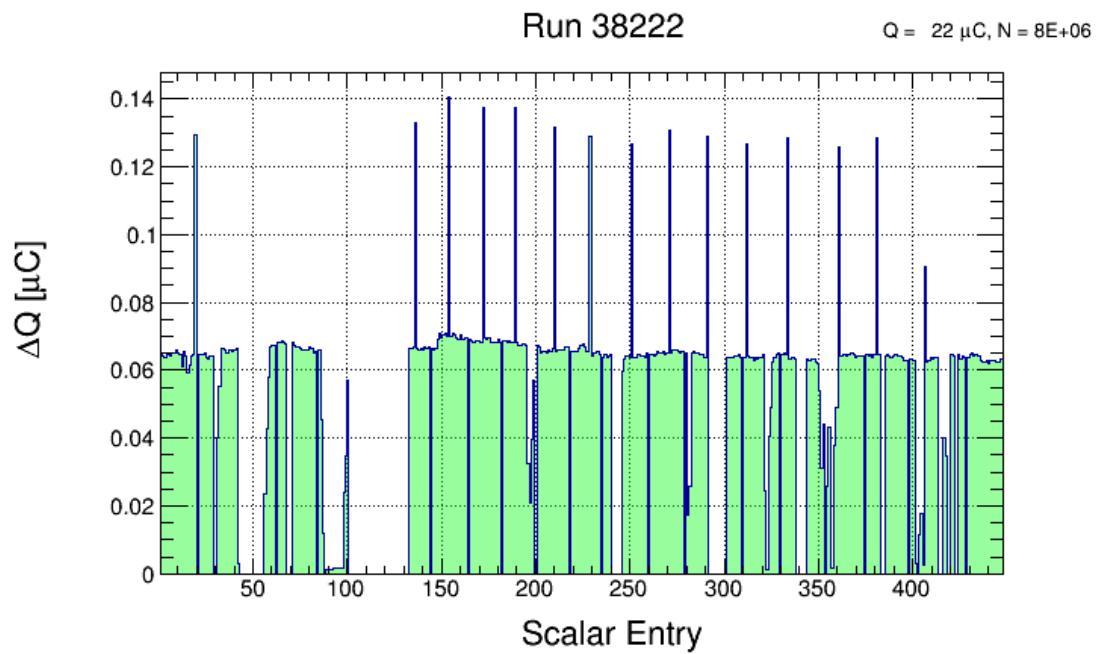


Figure 3.2: Charge per scalar reading for run 38222.

added to the total. Similarly, any events which occur within regions where no charge is recorded need to be discarded. This is accomplished by recording the bad event ranges for every file and removing these events from our analysis.

The result of this procedure is a numerical value of charge for each run. For practitioners, it is important to note that this value needs to be scaled by the DAQ scaling factor before it represents a value of charge. In our analysis, the numerical value of charge for a typical file is a few tens of micro-Coulombs.

3.3 Determination of Good Run List

The total dataset contains 831 runs. Due to the complex experimental setup, it is not uncommon for run conditions to change during a few of the runs such that the data collected are not of analysis quality. Imagine as a simple example that the liquid hydrogen target boils, the density is suddenly decreased, and the number of recorded events drops drastically (but the Faraday Cup charge would look the same). For this reason, a good run list is constructed and used in the analysis.

To construct this list, we simply count good electrons in every file and normalize that by the accumulated charge for that file. While the number of events collected varies from run to run the ratio defined above is a stable quantity – provided that the run conditions do not vary greatly. Runs which are within 3 standard deviations of the mean (calculated over the dataset) are used as good runs. The good run list used for this analysis contains 522 runs.

3.4 Helicity Determination

During the course of the E1-F run period the beam helicity convention was changed by the insertion of a half-wave plate at the injector. Our definition of + and – helicity must change in accordance with these wave-plate insertions. To monitor these changes, the value of $A_{LU}^{\sin \phi}$ for π^+ is recorded for every run. Whenever the asymmetry (which has a magnitude of around 3%) changes sign, we know that the sign convention has changed. These changes are then taken into account in the data analysis.

3.5 Vertex Corrections

Vertex information (v_x, v_y, v_z) is calculated based on the intersection of a track with the midplane (the plane which contains the beamline and bisects the sector at $\phi_{rel} = 0$). If the beam is not centered at

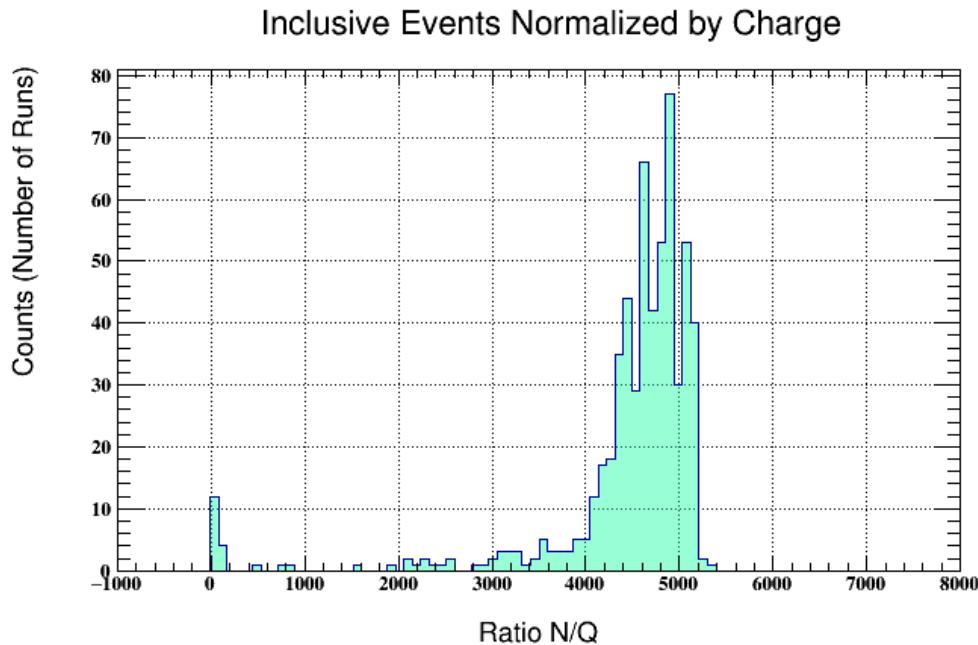


Figure 3.3: Inclusive electrons per file normalized by the total charge accumulated for the file. This quantity is used to make a good run list.

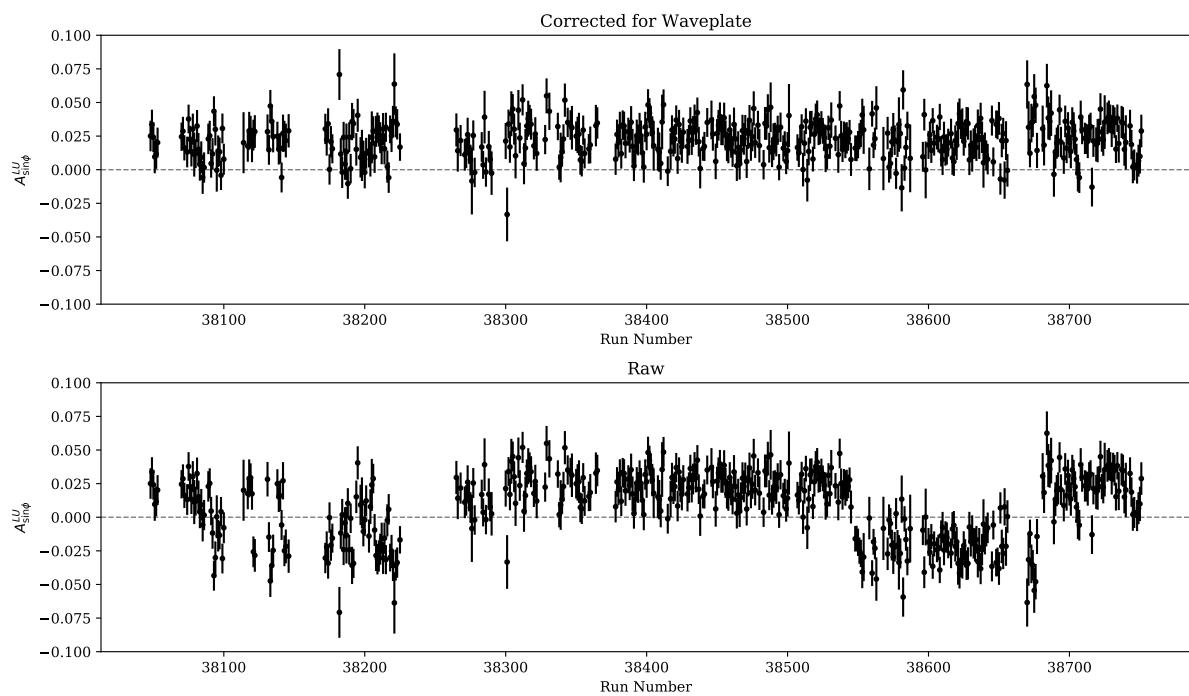


Figure 3.4: The waveplate position is determined and corrected by plotting the BSA for π^+ mesons as a function of the run. The top panel shows the corrected results, the bottom shows the results before changing the helicity.

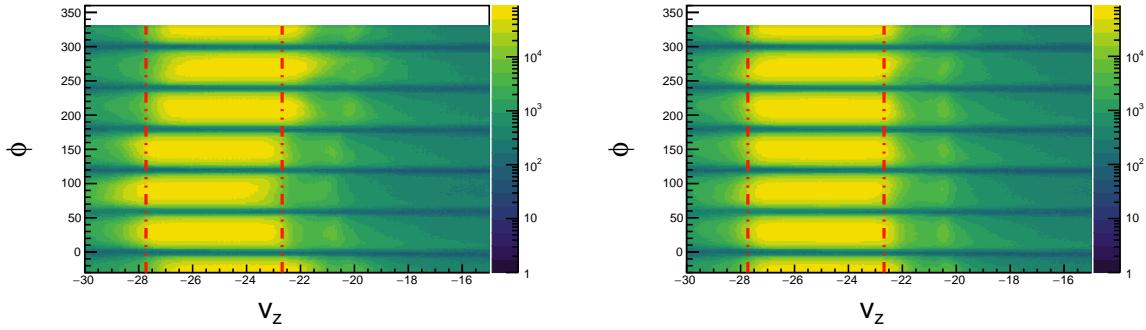


Figure 3.5: The z-vertex v_z position shown for different values of ϕ the azimuthal angle in the hall. The left figure shows the distribution before corrections are applied, the right after. The vertical red lines bound the region which we define as acceptable for electrons in our analysis.

$(x, y) = (0, 0)$, the calculation of vertex position needs to be corrected by shifting the midplanes in accordance with the target offset. This offset (x, y) is identified by plotting events from the control foil placed near the target, which has a z position of -20 cm.

For the E1-F run period, the beam position was (0.15, -0.25) cm.

3.6 Timing Corrections

Timing information comes from the time-of-flight detector system. After normal calibration, small offsets in timing between time of flights paddles still exist for the E1-F dataset. These biases can be removed on a run-by-run and paddle-by-paddle basis by adding a small shift t_{corr} . In order to determine this shift t_{corr} for each paddle, charged pions are used.

Using momentum information from the drift chambers the value of β can be predicted and the difference $\Delta\beta$ can be determined for each electron/pion pair.

$$\Delta\beta = \beta_{obs} - \beta_{pred} = \frac{d}{ct_{obs}} - \sqrt{1 + (m/p)^2} \quad (3.6)$$

Here m is assumed to be m_π . The offset $\Delta\beta$ from 0 is used to define the value of t_{corr} for each paddle. If this value is exceedingly small, no correction is applied. For some paddles with low statistics a reasonable value for t_{corr} cannot be obtained and these paddles are excluded from the analysis.

In the method described above, the calibrated paddle is the one which is struck by the pion. The electron paddle which was struck could also require calibration. In practice the magnitude of the correction term t_{corr} is small, and the paddle offset is (likely) randomly distributed about 0 when considering

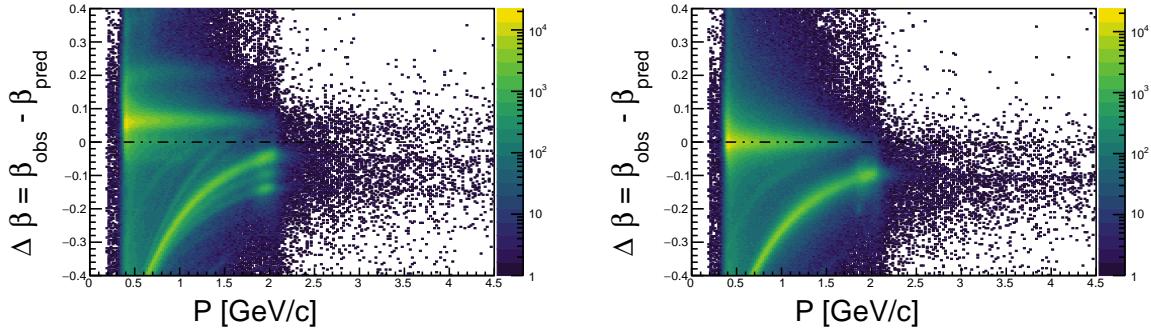


Figure 3.6: Timing corrections are shown for paddle 24 of sector 1. The left image shows the $\Delta\beta$ distribution before corrections. On the right the same is shown after correction of the timing for this paddle. We assume the mass of the track to be the pion, these show up as the green band. Heavier protons are visible below the pion band.

all paddles. By including events from many different (electron) paddles, miscalibration effects from the electron side cease to be important. This is demonstrated by the success of the technique in centering the $\Delta\beta$ distributions.

The work described in this section was performed by Nathan Harrison for the E1-F dataset.

3.7 Kinematic Corrections

The magnetic field map used in reconstruction to swim particle tracks cannot perfectly match the real magnetic field of the hall. As a result of this the reconstructed momentum of particles is often slightly off (on order of 1%). Small misalignments in detector positions also contribute to this effect. In order to correct for these small differences, the kinematics (p, θ) of charged tracks is corrected.

Various procedures exist for the correction of kinematic variables of measured particles, and they all rely on energy and momentum conservation applied to standard processes (such as elastic scattering). The procedure used to derive corrections for the E1-F dataset was developed and described by Marco Mirazita in [12].

In this analysis the need for correction to θ (the polar angle measured from the beamline) arises from misalignments in the drift chambers. This implies that the correction will be the same for positives and negatives, and this assumption is used in the correction algorithm. First elastic ($ep \rightarrow ep$) events are selected by identifying electron/proton events and using a missing mass around 0. The kinematics of the event are then calculated.

$$k^\mu = (k, 0, 0, k) \quad (3.7)$$

$$p^\mu = (M_p, 0, 0, 0) \quad (3.8)$$

$$k'^\mu = (k', k' \sin \theta, 0, k' \cos \theta) \quad (3.9)$$

$$p'^\mu = (E_p, -p' \sin \alpha, 0, p' \cos \alpha) \quad (3.10)$$

Applying energy and momentum conservation to the equations above yeilds 3 equations.

$$k + M_p = k' + \sqrt{M_p^2 + p'^2} \quad (3.11)$$

$$k' \sin \theta = p' \sin \alpha \quad (3.12)$$

$$k = k' \cos \theta + p' \cos \alpha \quad (3.13)$$

Using these equations, the electron angle θ and the proton angle α can be predicted by using the momenta (k', p') . These values are compared with measured values and iteratively corrected by tuning the parameters of a phi-dependent 2nd order polynomial.

$$\cos \theta = 1 - M_p \frac{k - k'}{kk'} \quad (3.14)$$

$$\tan \alpha = \frac{1}{p'} \frac{k' \sin \theta}{k - k' \cos \theta} \quad (3.15)$$

After θ corrections are applied, the momentum of the electrons are corrected by using an analogous procedure for k' instead of θ and α . The momentum corrections are calculated as functions of ϕ for each sector in one degree bins of θ . Finally, the positively charged particles momenta are corrected by selecting the exclusive event ($ep \rightarrow e\pi^+N$). In this reaction the scattered electron and pion are detected and the neutron is selected using a missing mass cut. Assuming the electron momentum, electron angle, and pion angle to be correct, the pion momentum correction is then calculated by iteratively improving the central position of the neutron mass peak to coincide with M_N . Marco Mirazita shows in his note that these corrections can be satisfactorily applied to all negative (coming from electron) and positive (coming from positive pi-meson) particles.

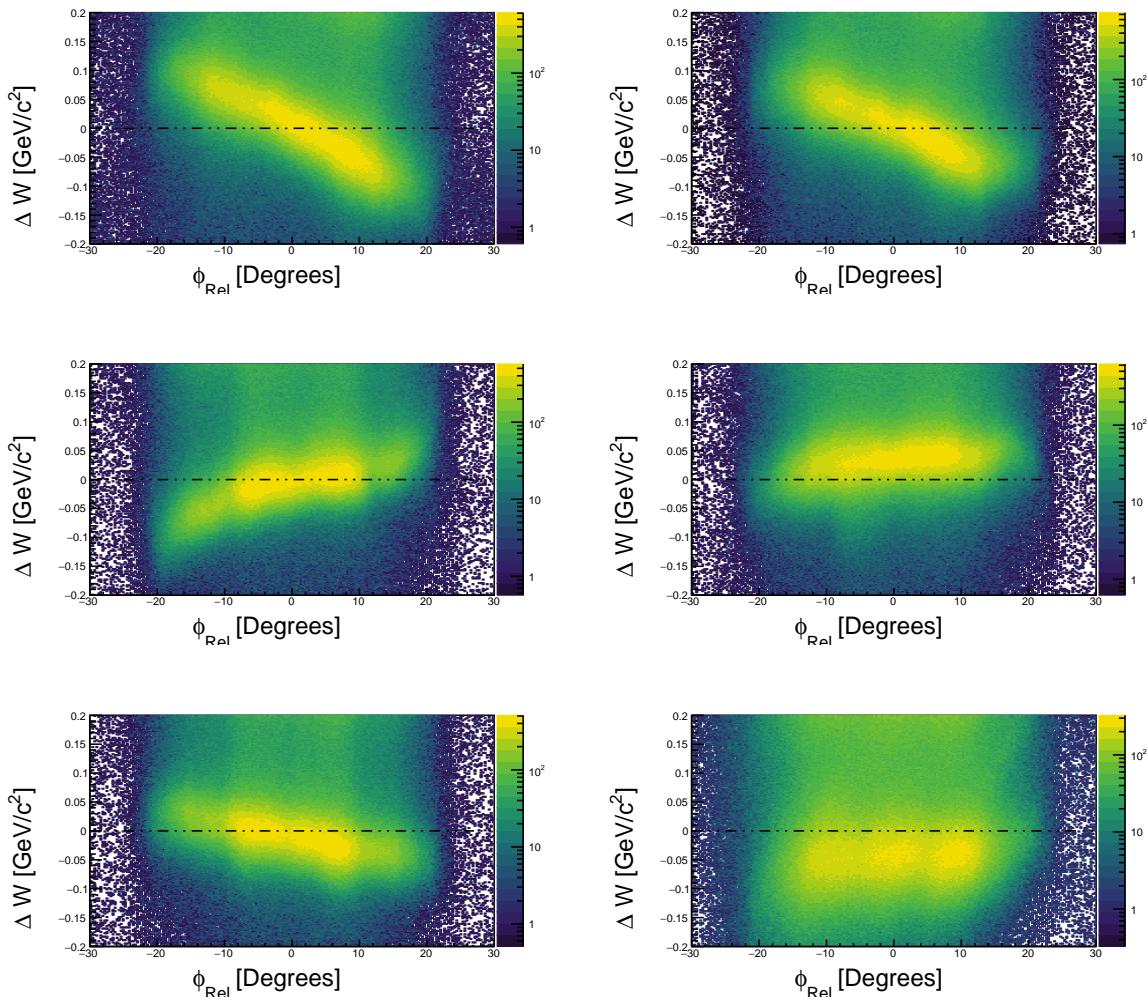


Figure 3.7: This figure shows the deviation from M_p of the W spectrum peak for elastic $ep \rightarrow ep$ events (before corrections).

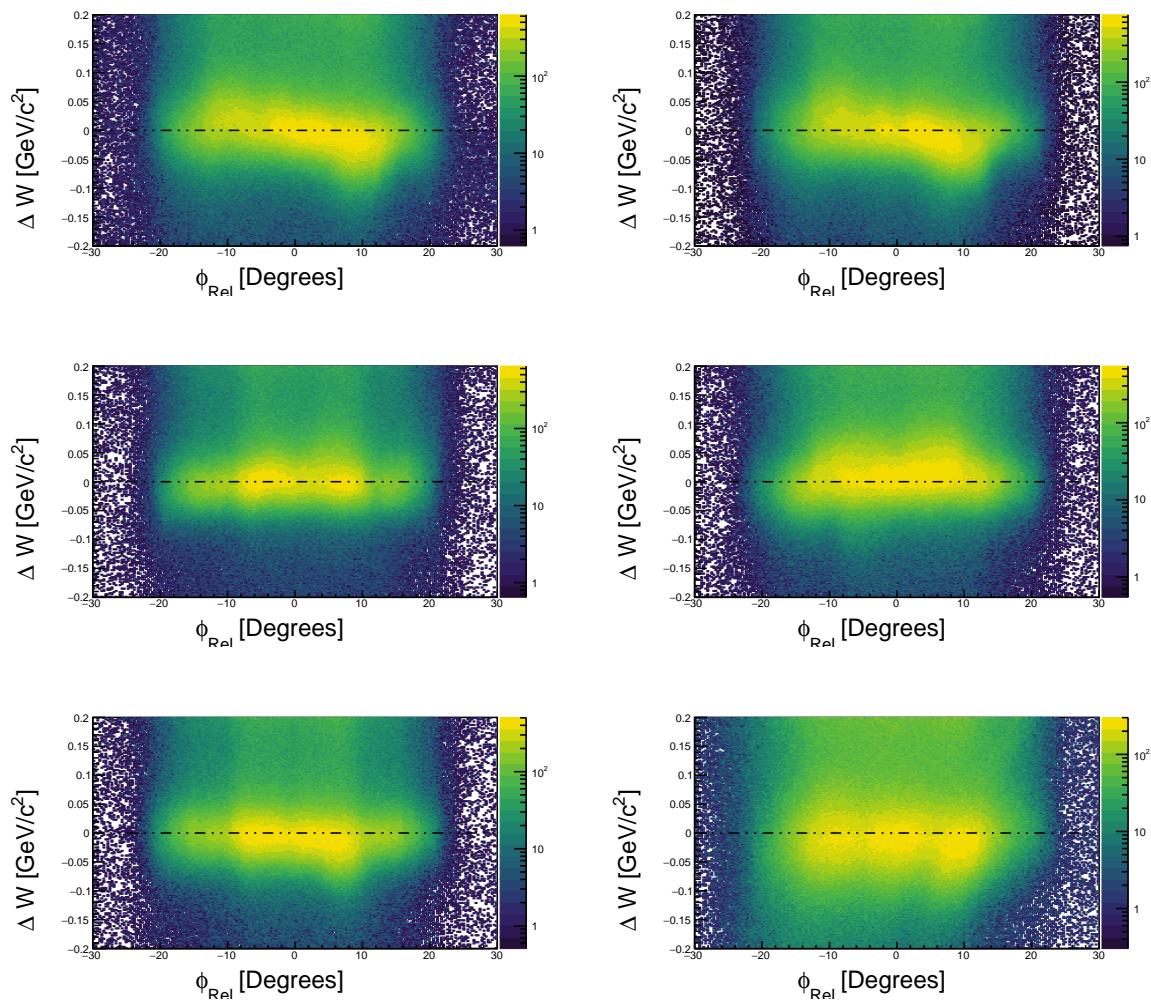


Figure 3.8: This figure shows the deviation from M_p of the W spectrum peak for elastic $ep \rightarrow ep$ events (after ϕ -dependent corrections).

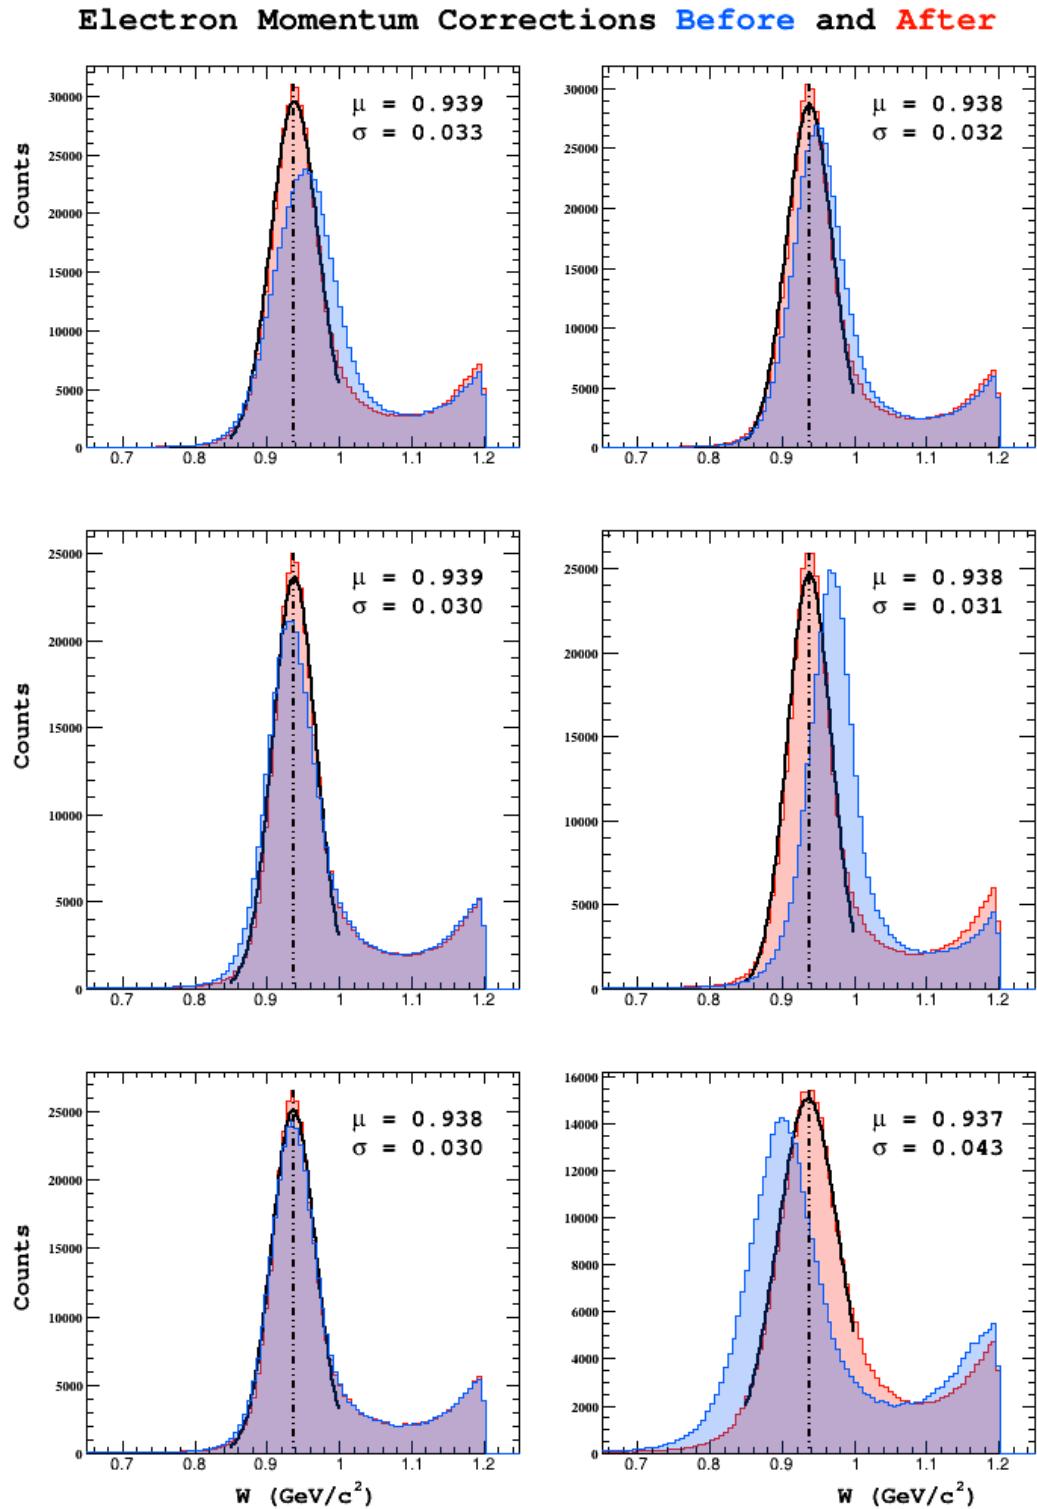


Figure 3.9: Elastic events shown in the spectrum of W before and after momentum corrections are applied.

Chapter 4

Particle Identification

4.1 Introduction

Particle identification (PID) is the process of classifying tracks as known particles. After reconstruction and matching of detector responses to each track, the reconstruction package `reccsis` assigns a preliminary particle identification based on loose selection criteria. In this analysis, tracks are classified based on a more stringent criteria. This chapter discusses the methodology used by the authors to classify particles.

4.2 Electron Identification

Electrons in CLAS are abundant, and the detection of an electron is a basic necessity for every event that will be analyzed. Each negative track is considered a possible electron, a series of physically motivated cuts is applied. If a track passes all cuts, it is identified as an electron. All track indices which pass electron identification are saved, and the one with the highest momentum is used in the analysis.

4.2.1 Electron ID Cuts

The cuts used to select electrons are enumerated below.

- Negative charge
- Drift chamber region 1 fiducial
- Drift chamber region 3 fiducial
- Electromagnetic Calorimeter fiducial (UVW)

- EC minimum energy deposition
- Sampling Fraction (momentum dependent)
- z-vertex position
- Cherenkov counter θ_{cc} matching to PMT number
- Cherenkov counter ϕ_{rel} matching to PMT (left/right)

Each cut will now be described in more detail.

Negativity Cut

Each track is assigned a charge based on the curvature of its trajectory through the magnetic field of the torus. This is done during the track reconstruction phase. The tracks are eliminated as electron candidates if they are not negatively charged.

Drift chamber fiducial

Negative tracks which pass geometrically close to the edges of the drift chamber are, from a tracking perspective, more difficult to understand. Often these tracks originate from downstream background, or are otherwise unacceptable. Additionally, tracks which fall outside of the fiducial region of the drift chambers are likely to fall outside of the fiducial region of the downstream detectors as well. For these reasons, it is common to remove tracks which are geometrically close to the boundaries of the drift chambers in region 1 as well as region 3 coordinate systems.

To implement this cut the (x, y) coordinates of the drift chambers are rotated into one sector. Then boundaries y_{left}, y_{right} are defined as linear functions of x . The boundary lines are parametrized by an offset h and an angle of the boundary line with respect to the center of the sector at $x = 0$. The slope of these lines is $\pm \cot(\theta)$.

$$y_{right} = h + \cot(\theta) \quad (4.1)$$

$$y_{left} = h - \cot(\theta) \quad (4.2)$$

Tracks passing this criterion are those which have $y > y_{left}(x)$ and $y > y_{right}(x)$.

Electromagnetic Calorimeter fiducial (UVW)

As tracks traverse the electromagnetic calorimeter they develop electromagnetic showers. If the track passes close to the edges of the detector, there is a chance that the shower will not be fully contained

| Region | Height h (cm) | Angle θ (degrees) |
|--------|-----------------|--------------------------|
| 1 | 22 | 60 |
| 3 | 80 | 49 |

Table 4.1: Cut parameters used for the DC fiducial cut.

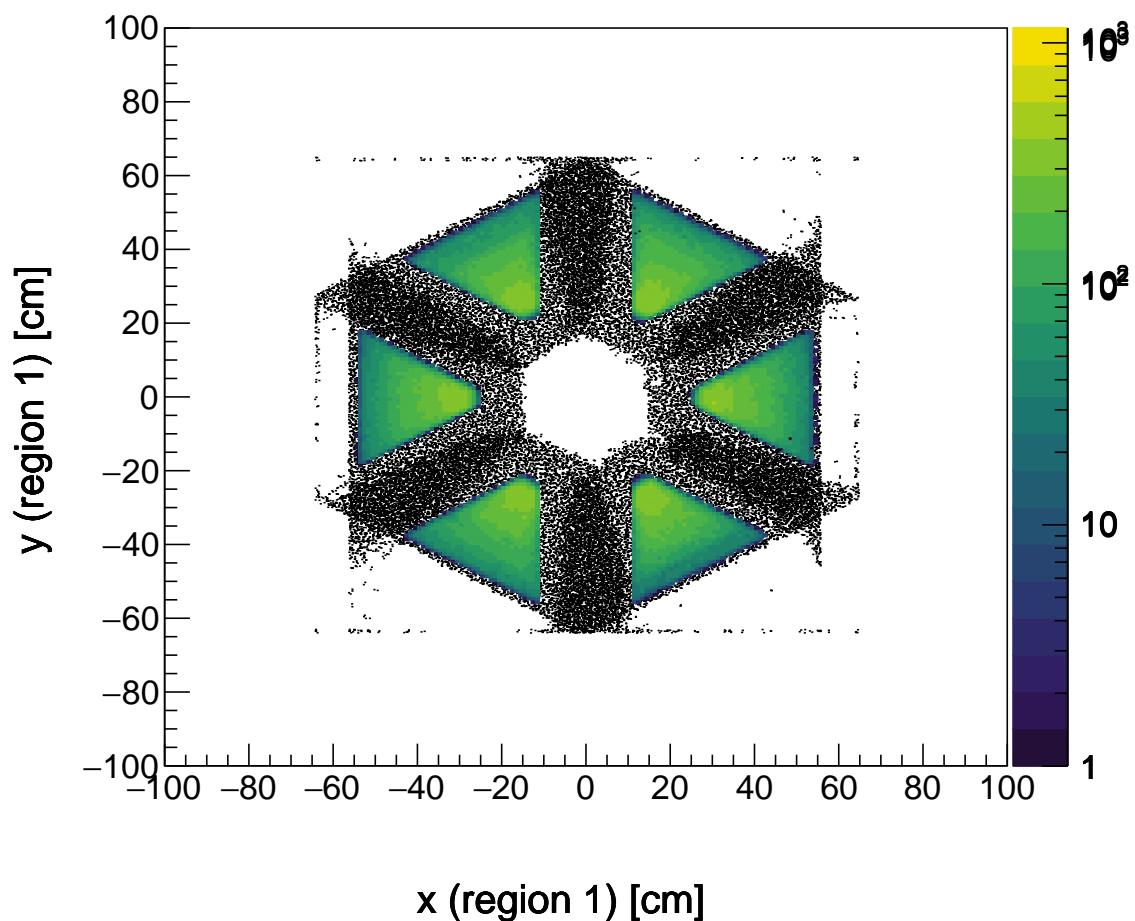


Figure 4.1: Tracks shown in color remain after the application of drift chamber region 1 fiducial cuts to all cuts, shown here as black points.

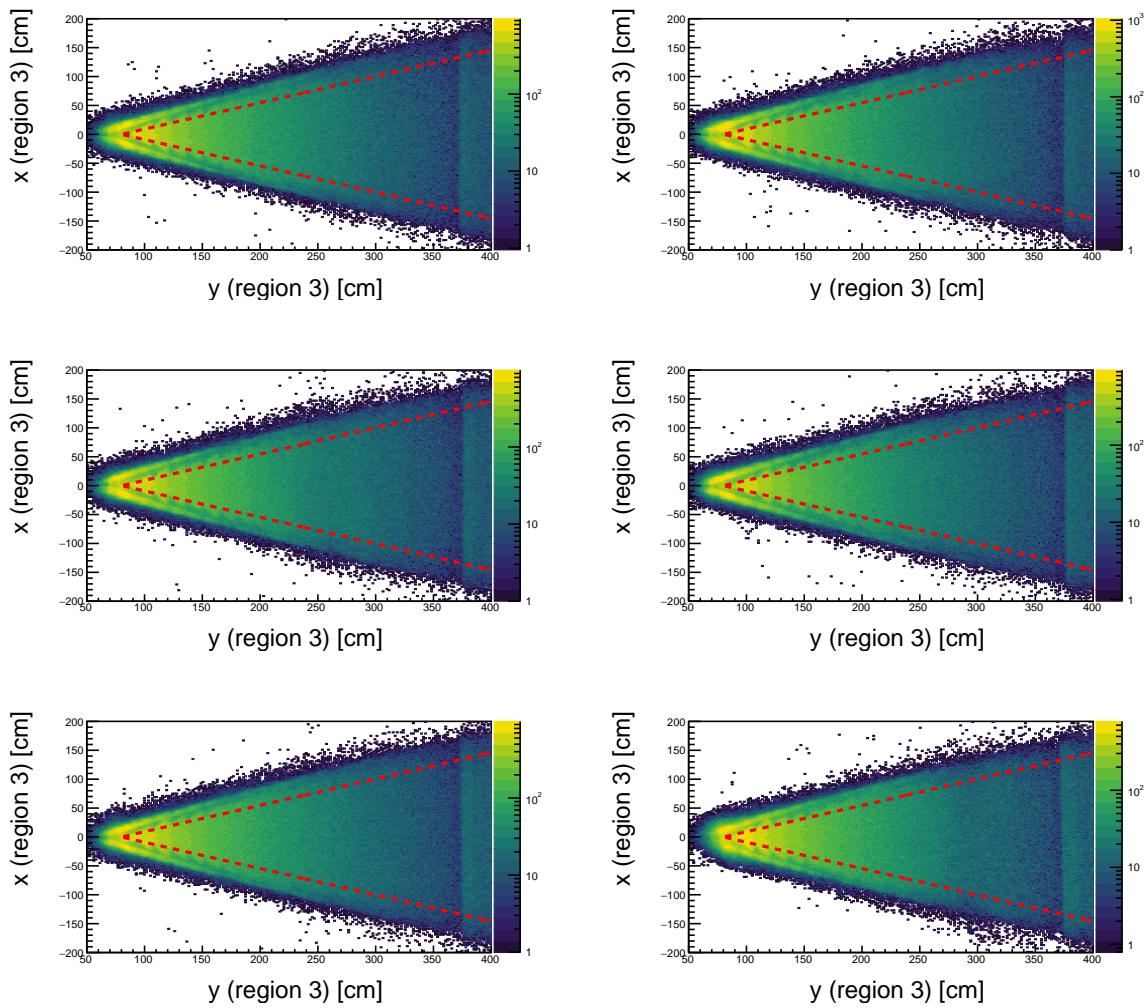


Figure 4.2: The selection criteria shown in red is applied to drift chamber region 3.

| EC Coordinate | Min (cm) | Max (cm) |
|---------------|----------|----------|
| U | 70 | 400 |
| V | - | 362 |
| W | - | 395 |

Table 4.2: Cut parameters used for the EC fiducial cut.

within the calorimeter volume (it spills out the edges). For this reason, it has become standard to remove the hits which fall within the outer 10 centimeters of each layer of the EC (10 centimeters is the width of a scintillator bar). This cut is applied in the U, V, W coordinate system.

EC minimum energy deposition

The negative tracks that start out as electron candidates are primarily composed of electrons and negative π mesons. One way to differentiate between these two species is to exploit the difference in energy deposition between the two in the electromagnetic calorimeter. Electron typically develop a much larger more energetic shower than π mesons, which minimally ionize the calorimeter material. The result is that the total energy deposition is typically larger for electrons than π mesons. In this analysis we require that at least 60 MeV was deposited in the inner calorimeter for electron candidates.

Sampling Fraction (momentum dependent)

The electromagnetic calorimeter is designed such that electrons will deposit $E_{dep}/p \approx 0.3$ approximately one-third of their energy, regardless of their momentum. In contrast to this, the ratio E_{dep}/p for π mesons decreases rapidly with momentum. To develop a momentum dependent cut for this distribution, all negative candidates are first filled into a two-dimensional histogram of E_{dep}/p vs. p . The histogram is then binned more coarsely in momentum, and projected into a series of 40 slices. Each of these slices is fit with a Gaussian to extract the position μ_i and width σ_i of the electron peak. Finally, the authors choose a functional form for the mean and standard deviation of the distributions to be a third order polynomial in momentum.

$$\mu(p) = \mu_0 + \mu_1 p + \mu_2 p^2 + \mu_3 p^3 \quad (4.3)$$

$$\sigma(p) = \sigma_0 + \sigma_1 p + \sigma_2 p^2 + \sigma_3 p^3 \quad (4.4)$$

Boundaries are constructed from this information by adding (subtracting) n_σ from the mean. In the nominal case, we use $n_\sigma = 2.5$.

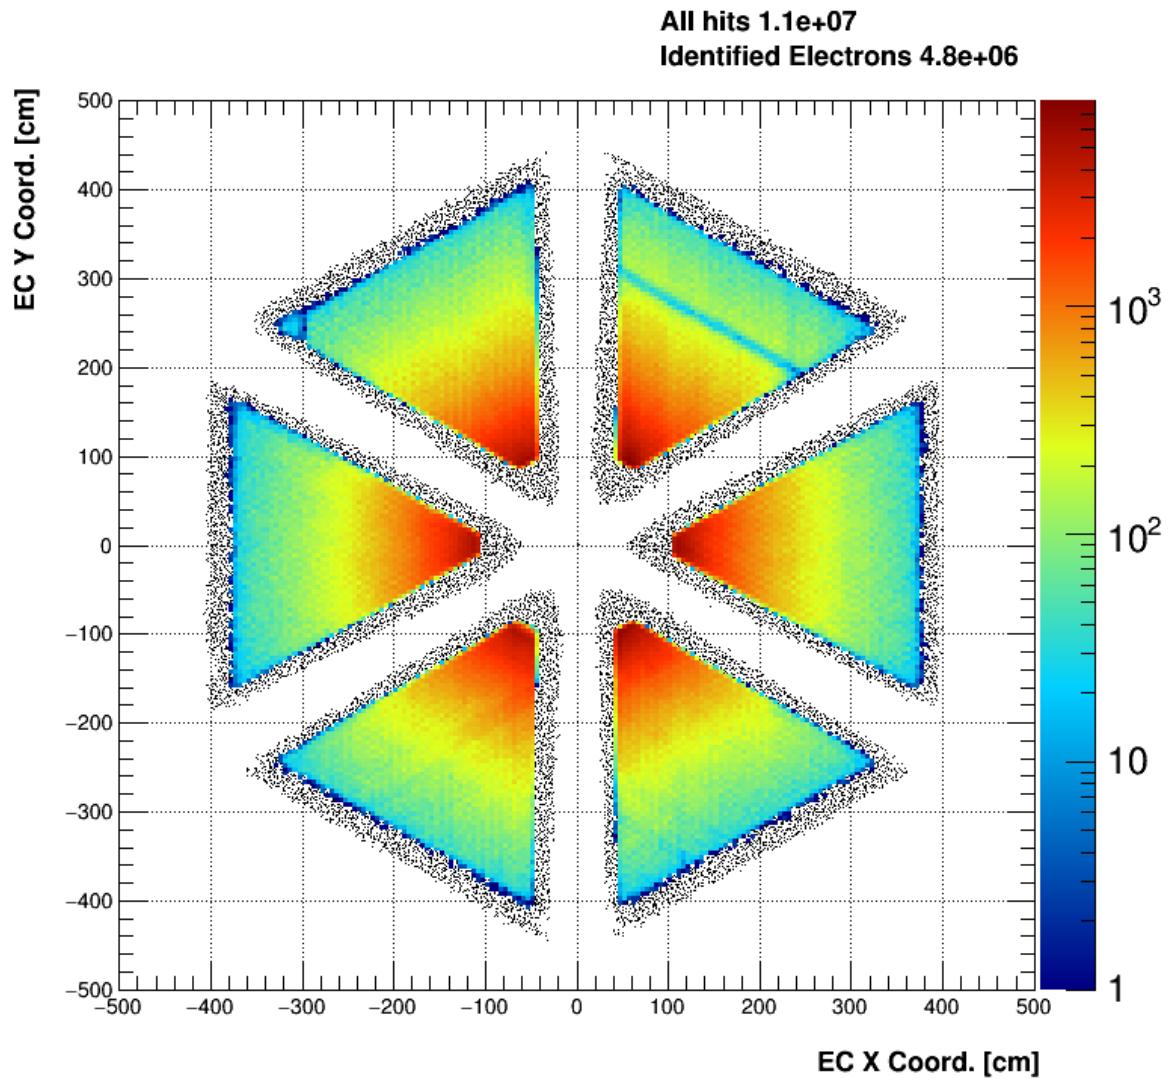


Figure 4.3: All negative tracks are shown here in black. In color, the tracks which pass the EC fiducial cut are shown.

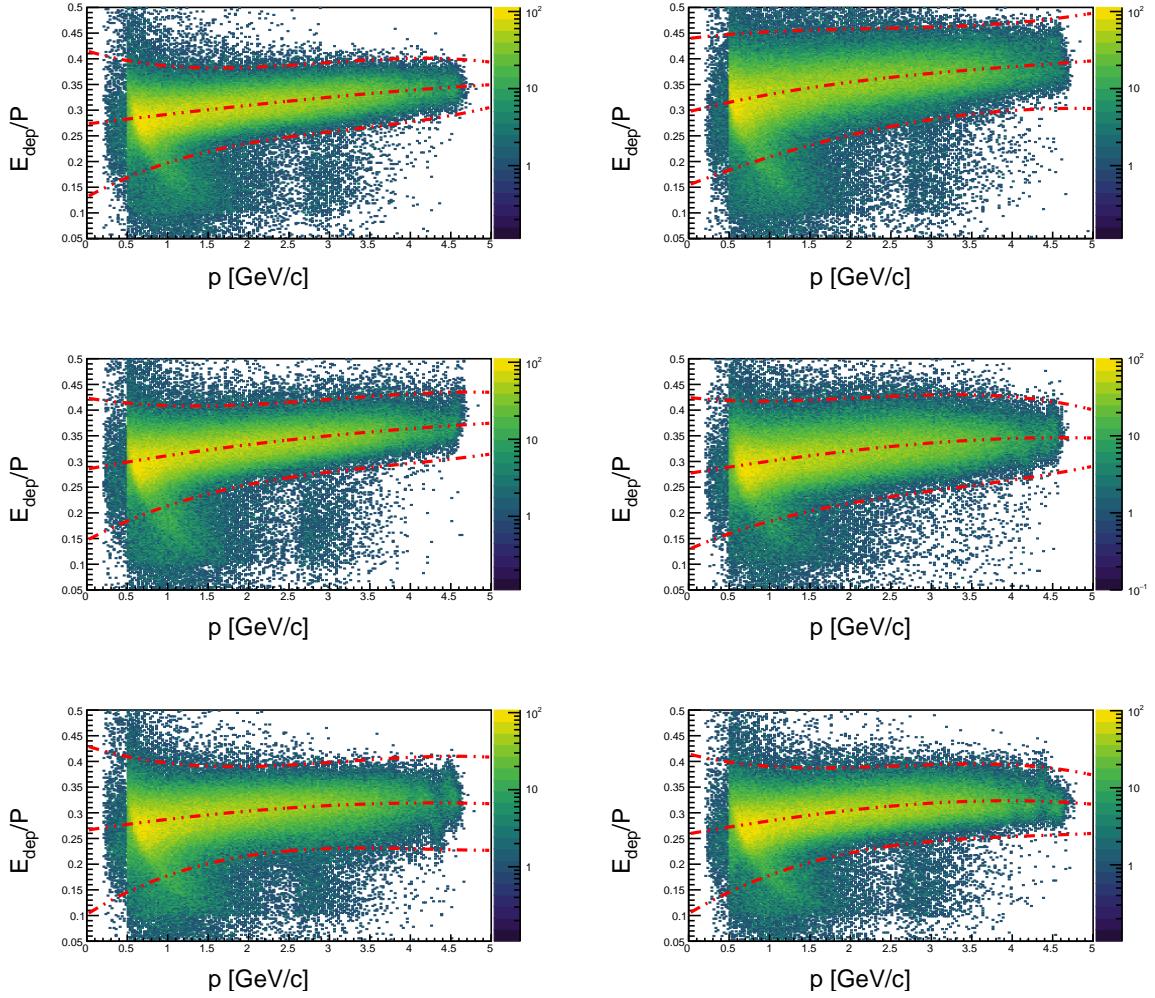


Figure 4.4: The sampling fraction selection boundary is shown here for the nominal value of $N_{sigma} = 4$.

$$f_{max}(p) = \mu(p) + n_\sigma \sigma(p) = (\mu_0 + n_\sigma \sigma_0) + (\mu_1 + n_\sigma \sigma_1)p + (\mu_2 + n_\sigma \sigma_2)p^2 + (\mu_3 + n_\sigma \sigma_3)p^3 \quad (4.5)$$

$$f_{min}(p) = \mu(p) - n_\sigma \sigma(p) = (\mu_0 - n_\sigma \sigma_0) + (\mu_1 - n_\sigma \sigma_1)p + (\mu_2 - n_\sigma \sigma_2)p^2 + (\mu_3 - n_\sigma \sigma_3)p^3 \quad (4.6)$$

Due to slight differences between the 6 sectors of the CLAS detector, the authors choose to calibrate and apply this cut for each sector individually. The results are shown in table 4.3.

z-vertex position

Electrons can be produced as part of e^+e^- pairs. For this analysis, these are not of interest. The authors choose to select only electrons which originate from the target and are believed to be the scattered incoming electron. For this reason the authors accept only electron candidates which have a z-vertex $v_z \in [-27.7302, -22.6864]$. This cut is applied after the vertex position has been corrected (this correc-

| Parameter | Sector 1 | Sector 2 | Sector 3 | Sector 4 | Sector 5 | Sector 6 |
|------------|--------------|--------------|--------------|--------------|--------------|--------------|
| μ_3 | -8.68739e-05 | 0.000459313 | 9.94077e-05 | -0.000244192 | -7.65218e-05 | -0.000392285 |
| μ_2 | -0.000338957 | -0.00621419 | -0.00267522 | -0.00103803 | -0.00222768 | -0.00105459 |
| μ_1 | 0.0191726 | 0.0393975 | 0.02881 | 0.0250629 | 0.0233171 | 0.0265662 |
| μ_0 | 0.2731 | 0.296993 | 0.285039 | 0.276795 | 0.266246 | 0.25919 |
| σ_3 | -0.000737136 | 0.000189105 | -0.000472738 | -0.000553545 | -0.000646591 | -0.000633567 |
| σ_2 | 0.00676769 | -0.000244009 | 0.00493599 | 0.00434321 | 0.00717978 | 0.00626044 |
| σ_1 | -0.0219814 | -0.00681518 | -0.0180929 | -0.0140827 | -0.0246181 | -0.022029 |
| σ_0 | 0.0474188 | 0.0475098 | 0.0461743 | 0.0492728 | 0.0546257 | 0.0517508 |

Table 4.3: μ and σ values used to construct the momentum dependent sampling fraction cut.

tion will be discussed in a subsequent chapter).

Cherenkov counter θ_{cc} and ϕ_{rel} matching to PMT

The placement of photo-multiplier tubes (PMT) in the Cherenkov counter allows for additional consistency conditions to be applied. The placement of 18 PMTs increasing in polar angle away from the beamline means that the PMT segment number is correlated to the angle which the electron has with the beamline at the Cherenkov counter θ_{cc} . Additionally, PMTs that are placed on the left and right of the detector can be used to check consistency with the azimuthal angle the track forms with the central line of the detector (ie $\phi_{rel} > 0$ means the track was in the right half of the sector, $\phi_{rel} < 0$ means the track was in the left half of the sector). An integer code is used to describe the PMT associated with the track. The left PMT is assigned value -1, the right 1, and a signal in both PMTs is assigned 0. If both PMTs have a signal, the track is allowed to pass. If the left PMT was the one that had a signal, only events with $\phi_{rel} < 0$ are allowed to pass. Similarly if the right PMT fired (code = 1), only events with $\phi_{rel} > 0$ are allowed to pass. Technical note: the integers in question can be obtained from the ntupple22 format tree by doing the following.

```
for (int index = 0; index < event.gpart; index++) {
    int pmt = event.cc_segm[index]/1000 - 1;
    int segment = event.cc_segm[index]%1000/10;
}
```

4.3 Hadron Identification

Hadron identification in CLAS is done by correlating particle momentum from the drift chambers with timing information supplied by the time of flight detector. In this analysis some quality assurance cuts are applied preliminarily, but they do not discriminate between different species of particle. The likelihood methodology described in this section is based on the discussion provided by the BES collaboration in [13].

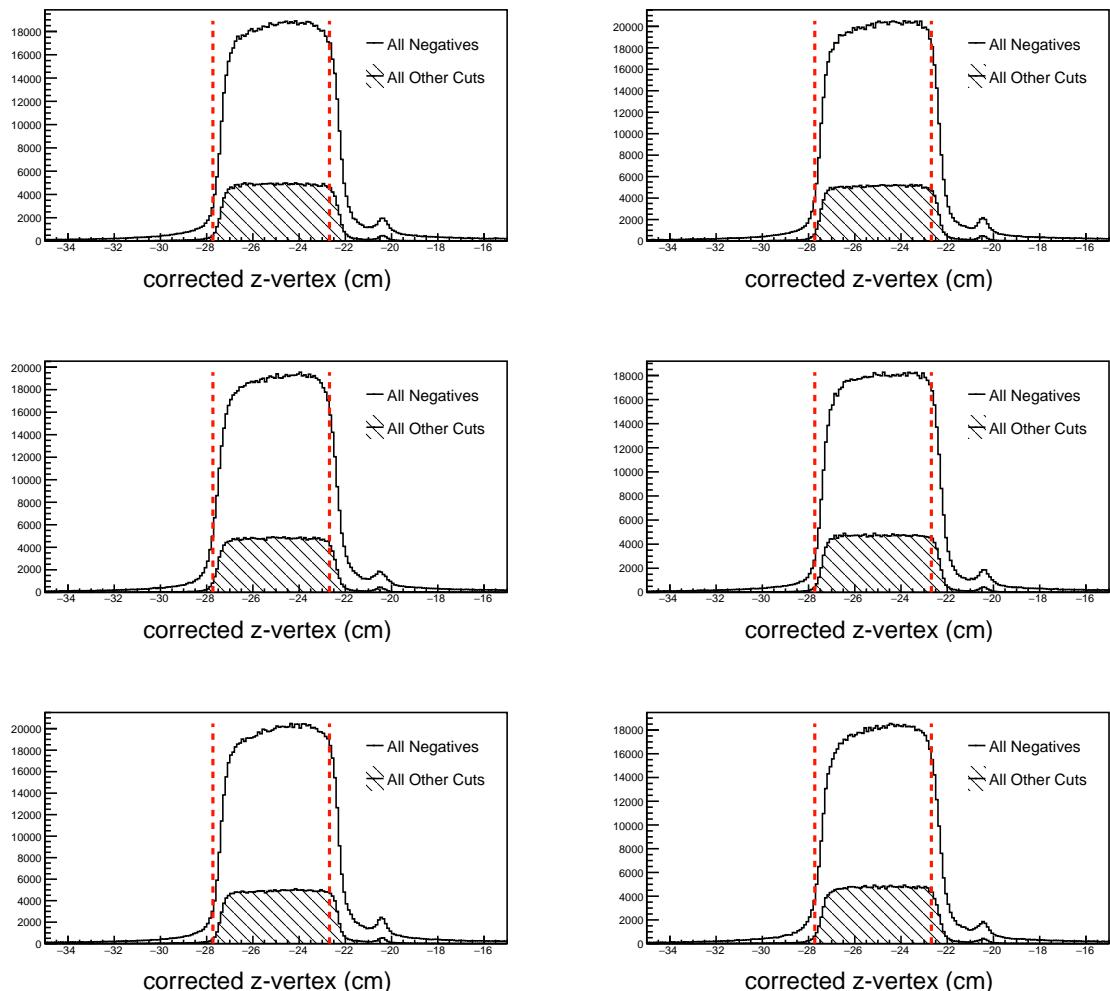


Figure 4.5: The track vertex cut is shown above. All negative tracks are shown in white, while the tracks passing all other criteria are shown in black hatch. The cut boundary is displayed as red lines. For E1-F the target center was located at -25 cm.

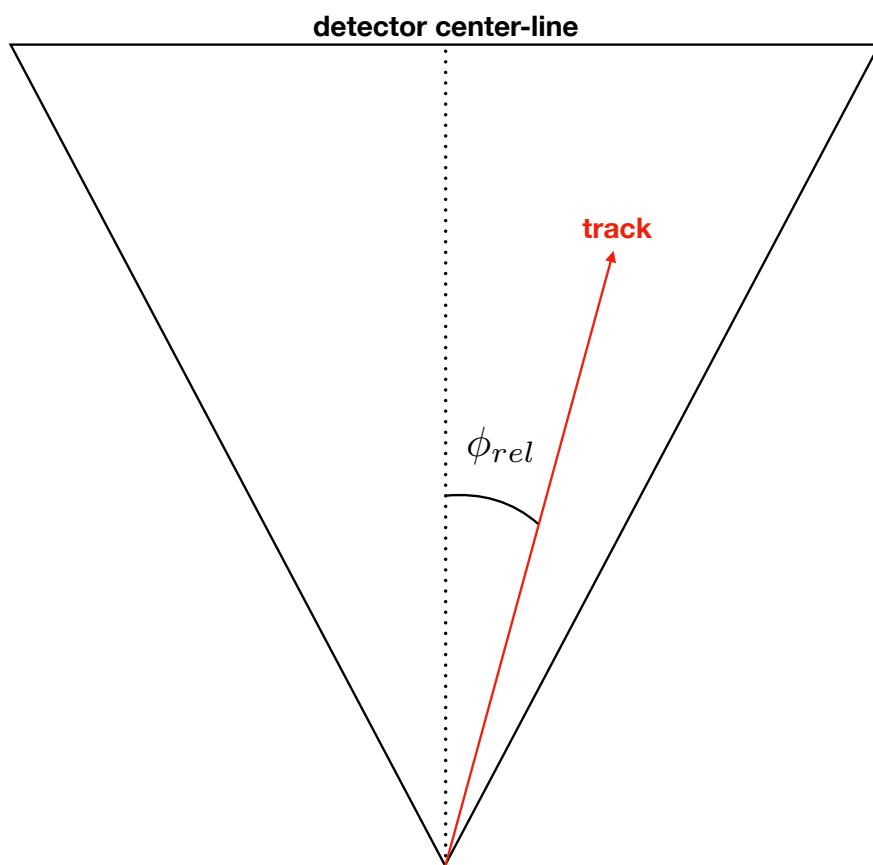


Figure 4.6: The angle ϕ_{rel} is the azimuthal angle between the central line of the detector and the track.

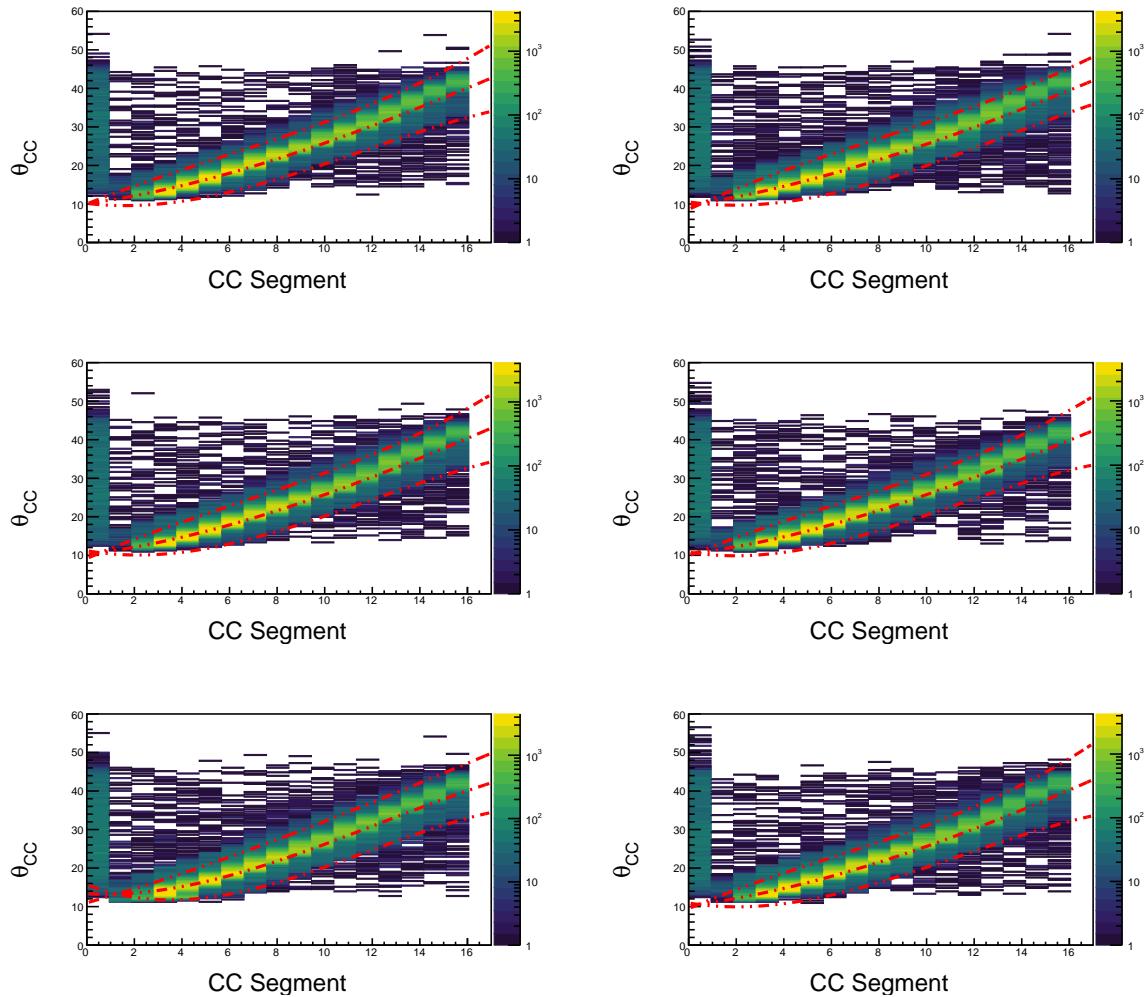


Figure 4.7: Correlation between θ_{CC} and the CC segment is shown above, with our selection boundaries overlaid in red.

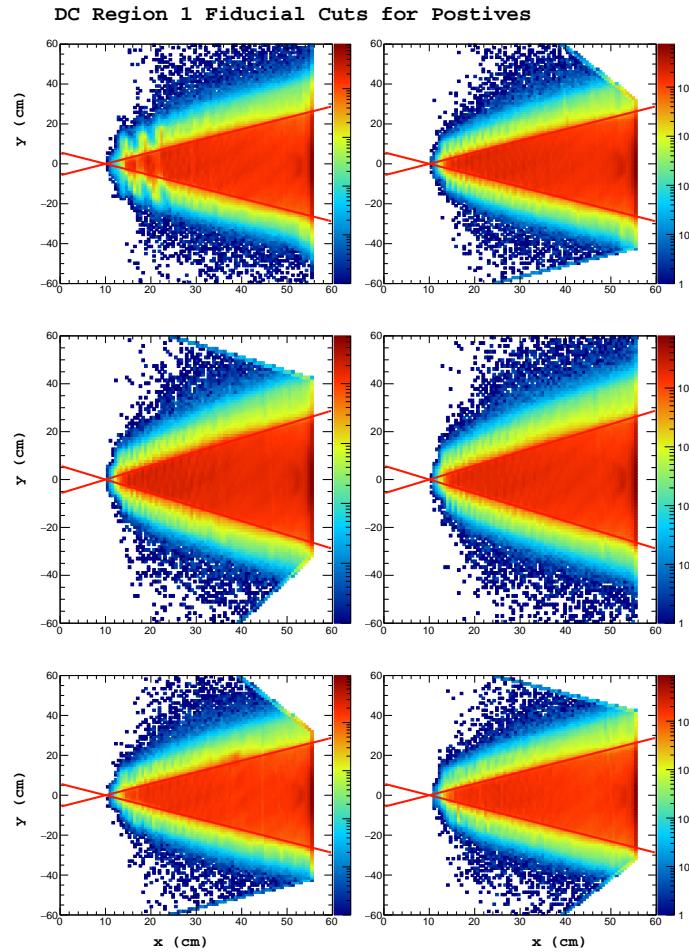


Figure 4.8: Shown above: Positive track hits on the region 1 drift chamber, events falling between the red lines are kept for analysis.

4.3.1 Hadron ID Cuts

The cuts used by the author for hadron classification are enumerated below.

- Drift chamber fiducial
- Hadron-electron vertex difference
- Likelihood maximization of $\beta(p, h)$

Drift chamber fiducial

Drift chamber fiducial cuts are applied (only region 1) using the same procedure as described for electrons. The parameters are for negative hadrons are those which are used for the electron. The parameters used for positive tracks are $h = 10, \theta = 60$.

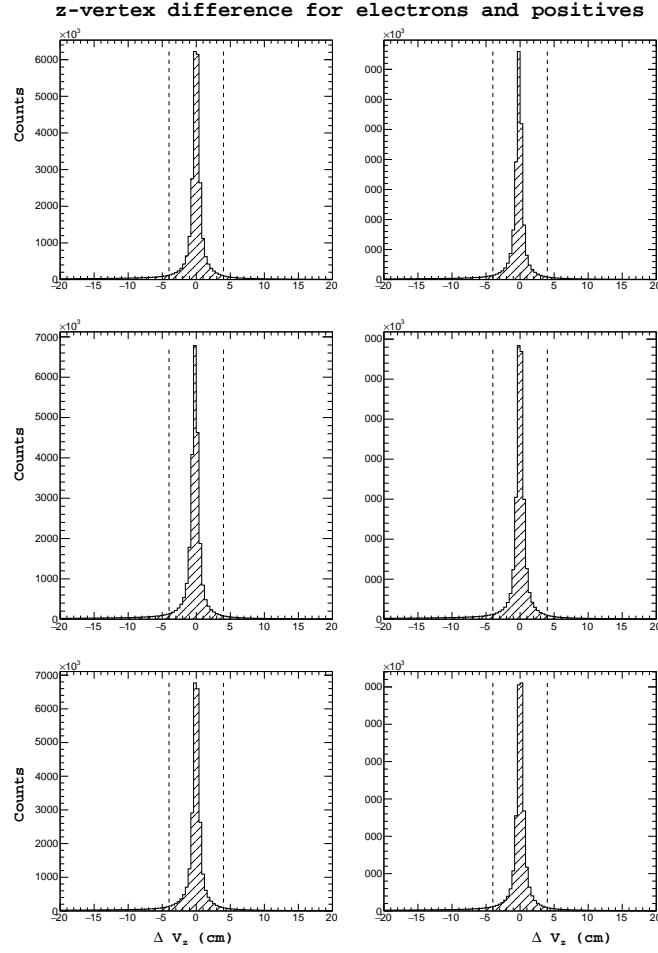


Figure 4.9: Shown above: The difference between the z-vertex position between detected electrons and positive tracks.

Hadron-electron vertex difference

The distance between the electron vertex and the hadron candidate track vertex is computed ($\delta v_z = v_z^e - v_z^+$). This distance is constrained to be within the length of the target (5 cm) see figure 4.3.1. If the analyst desires to look at events where the hadron is produced as the result of a decaying hadron, this cut should be removed.

Likelihood maximization of $\beta(p, h)$

In this section, positive hadrons are used as an example. The same method is applied to the negative hadrons. For each particle species considered, a normalized probability density function $P(x; p, h)$ is constructed for each input into the likelihood analysis. Here, x corresponds to the feature being used to categorize different particles (in our case, x is the β value measured by CLAS time-of-flight), p is the particle momentum, and h is the hadron being hypothesized (eg: in our case the possible values for

positive hadrons are pion, kaon, proton). In general if one uses a set of N variables $x = (x_1, x_2, \dots, x_N)$, the likelihood for a hypothesis h is defined below.

$$\mathcal{L}_h = \prod_{i=1}^N P_i(x_i; p, h) \quad (4.7)$$

In our case, the only random variable we consider is β , and the likelihood is just the PDF. Here, and in many cases where the choice is statistically appropriate, it is possible to use a Gaussian PDF for the variable $x_i (\beta)$.

$$P(\beta; p, h) = \frac{1}{\sqrt{2\pi}\sigma_\beta(p, h)} \exp \left\{ -\frac{1}{2} \left(\frac{\beta - \mu_\beta(p, h)}{\sigma_\beta(p, h)} \right)^2 \right\} \quad (4.8)$$

The identity is assigned by choosing the particle hypothesis h which maximizes the likelihood ratio.

$$\frac{\mathcal{L}_h}{\mathcal{L}_\pi + \mathcal{L}_K + \mathcal{L}_p} \quad (4.9)$$

Using this method, every positive track is assigned a particle identification. However, at times the likelihood value is quite small when compared with the maximum likelihood for that species. This is the case for positrons which are classified by this method as positive pions, because they are the closest particle for which a hypothesis has been provided. To avoid these situations, the confidence level α of each track is calculated and a cut is applied on the minimum confidence. This cut can be easily varied to see how it changes the analysis result.

$$\alpha = 1 - \int_{\mu - \beta_{obs}}^{\mu + \beta_{obs}} P(\beta; p, h) d\beta \quad (4.10)$$

This quantity represents the probability to observe a value of β as far from the mean as β_{obs} . Confidence levels of 0 then correspond to tracks which are poorly identified as the class h . In the case that the PDF is Gaussian, the standard 1, 2, and 3 sigma cuts on β vs. p can be understood simply as confidence levels of approximately $0.32 = 1 - 0.68$, $0.05 = 1 - 0.95$, and $0.01 = 1 - 0.99$.

Determination of probability density functions for likelihood method

The most important and most difficult part of constructing the likelihood ratio identification is the ascertainment of the mean and standard deviation of the probability density function (which depends on momentum) for the different particle hypothesis. In the case where exceptionally accurate monte carlo (MC) simulations of the detector are available, one can use the truth information and track matching to construct the β vs. p 2-dimensional histograms, and fit the $\mu(p)$ and $\sigma(p)$. In the absence of high quality MC, analysts typically fit directly the spectrum of β vs. p and extract the mean and variance. In this work, the authors chose to create an enhanced sample of candidates for each of the three positive

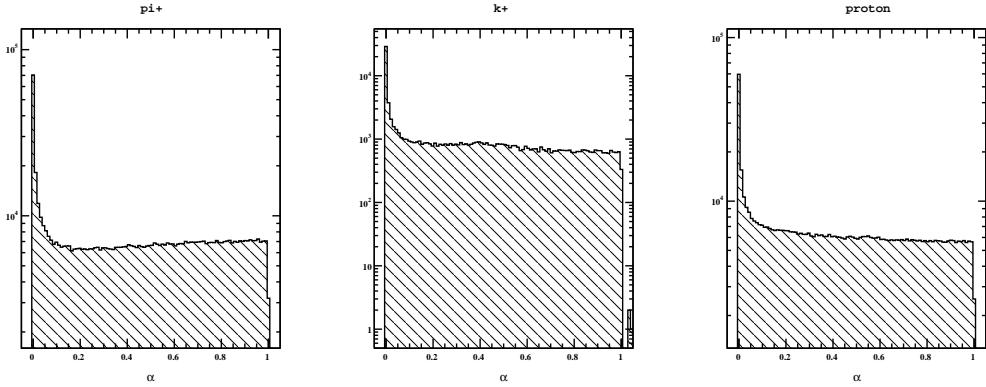


Figure 4.10: Shown above: The distribution of confidence level for all positive tracks after being classified by the likelihood ratio.

particles in question before doing the fitting. In this way, we hope to get a better quality fit of the true mean, and resolutions for the different species. For fitting of pion and proton resolutions, positive tracks are assumed to be pions and the missing mass of the event is calculated. Then, a cut is placed around the neutron mass. In doing so, we are selecting mainly two types of exclusive events. The first is $ep \rightarrow e\pi^+N$, and the second is $ep \rightarrow ep\pi^0$. In this way most positrons, and positive kaons are removed from the sample prior to fitting. The mean and variance are fit using a third order polynomial in p (MINUIT χ^2 minimization is used). The negative tracks π^- , K^- are fit directly as is normally done.

The parametrization used for the mean $\mu(p, h)$ and resolutions $\sigma(p, h)$ are shown below.

$$\mu(p, h) = \mu_{theory} + \Delta\mu \quad (4.11)$$

$$\mu_{theory} = \frac{1}{\sqrt{1 + (m_h/p)^2}} \quad (4.12)$$

$$\Delta\mu = \mu_0 + \mu_1 p + \mu_2 p^2 \quad (4.13)$$

$$\sigma(p, h) = \sigma_0 + \sigma_1 p + \sigma_2 p^2 \quad (4.14)$$

The values are displayed in the table below.

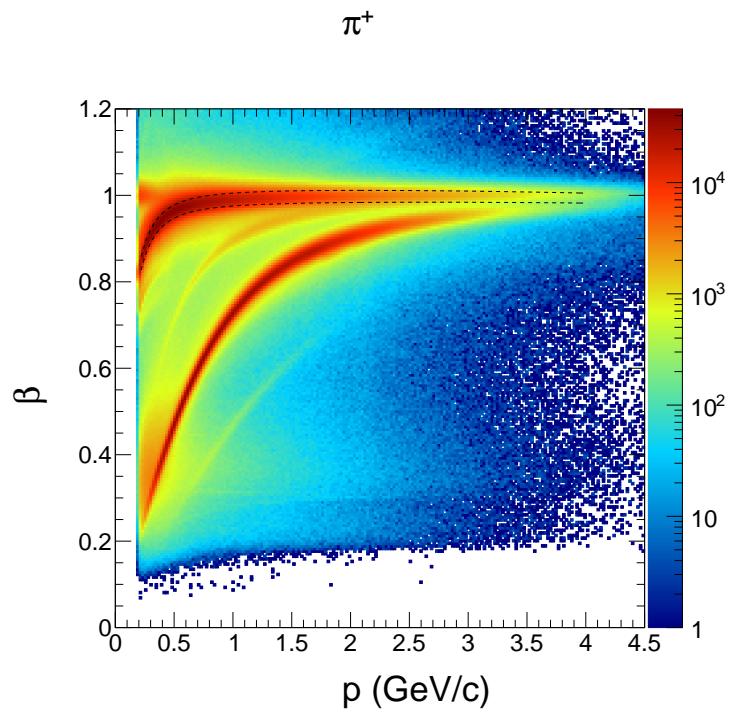


Figure 4.11: Shown above: All positive tracks overlaid with our determination of $\mu(p) \pm \sigma(p)$ for π^+

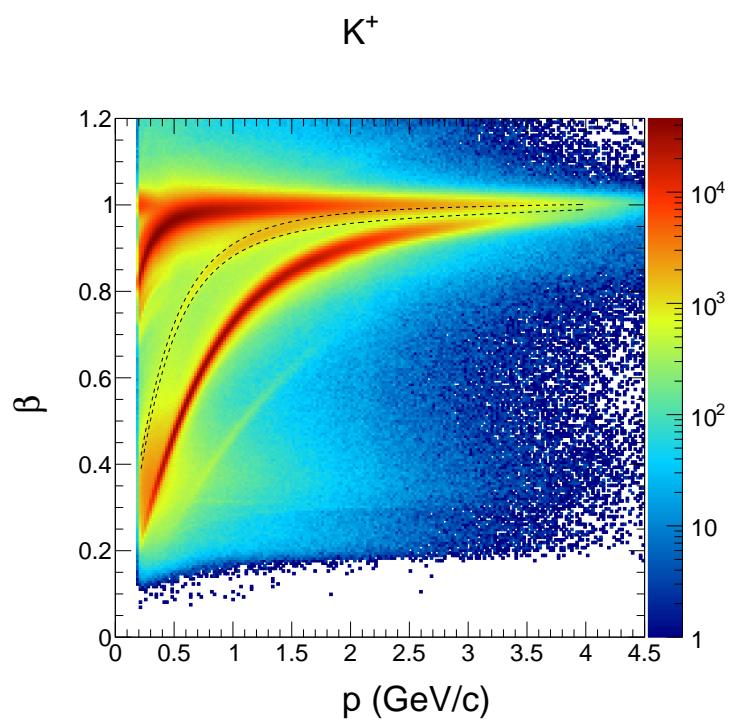


Figure 4.12: Shown above: All positive tracks overlaid with our determination of $\mu(p) \pm \sigma(p)$ for K^+

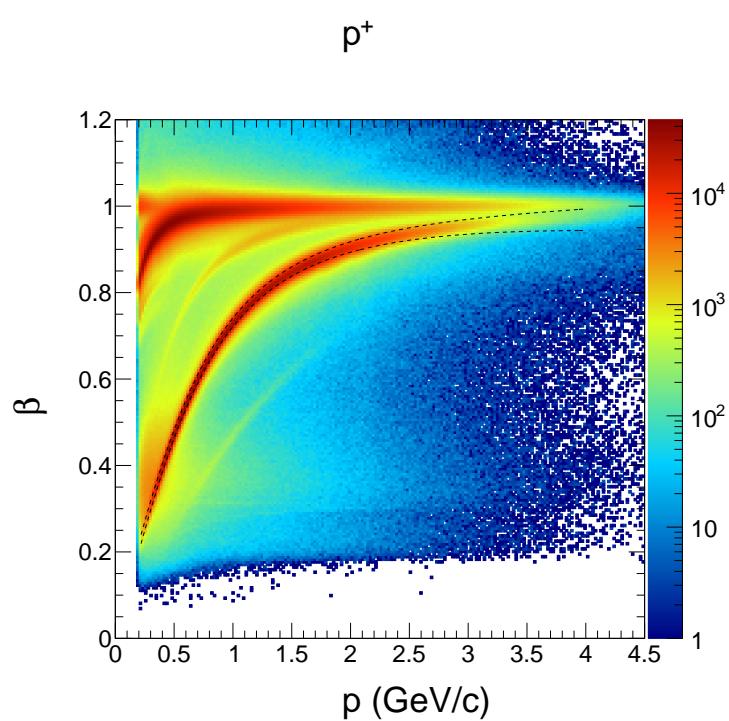


Figure 4.13: Shown above: All positive tracks overlaid with our determination of $\mu(p) \pm \sigma(p)$ for p^+

| Hadron | Parameter | Sector 1 | Sector 2 | Sector 3 | Sector 4 | Sector 5 | Sector 6 |
|---------|------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| K^+ | μ_2 | 0.00111554 | -8.97687e-05 | 4.78796e-05 | 0.000376425 | -0.00204856 | 0.000652209 |
| K^+ | μ_1 | -0.00468038 | 6.19414e-05 | -0.00081741 | -0.00107931 | 0.00629181 | -0.00264143 |
| K^+ | μ_0 | 0.00361012 | 0.00134921 | 0.00299674 | 0.00220194 | 0.000117821 | 0.00162582 |
| K^+ | σ_2 | -0.000331838 | -0.00105807 | -0.000712404 | -0.000573934 | -0.000259289 | 0.000508389 |
| K^+ | σ_1 | -0.00105857 | 0.00236686 | 0.000509169 | 0.000163467 | -0.00233617 | -0.00461598 |
| K^+ | σ_0 | 0.0154964 | 0.0117702 | 0.0140748 | 0.0143761 | 0.0184055 | 0.0180945 |
| π^+ | μ_2 | -0.000962041 | -0.000300602 | -0.000306326 | -3.2245e-05 | -0.00226511 | -0.000330818 |
| π^+ | μ_1 | 0.00296349 | 0.0016512 | 0.0021962 | 0.00176045 | 0.00750862 | 0.00126443 |
| π^+ | μ_0 | -0.00225794 | -0.00047045 | 0.000370406 | 0.000435526 | -0.000449409 | -0.00131045 |
| π^+ | σ_2 | -0.000127659 | 0.000691895 | -0.000289961 | 0.000315041 | -0.000936521 | -0.000131269 |
| π^+ | σ_1 | -0.000489092 | -0.0033948 | 0.00196853 | -0.00197841 | 0.00212778 | -0.000339411 |
| π^+ | σ_0 | 0.0155195 | 0.0167998 | 0.0124066 | 0.0157476 | 0.0145571 | 0.0141728 |
| p^+ | μ_2 | -0.00039358 | -0.000701003 | -0.000347651 | 0.0004854 | -0.00121666 | 0.000563786 |
| p^+ | μ_1 | -0.000295423 | 0.00170899 | 0.000794901 | -0.000744446 | 0.00376887 | -0.00353545 |
| p^+ | μ_0 | 0.00227353 | 0.00231676 | 0.00364672 | 0.00276859 | 0.00128827 | 0.00439605 |
| p^+ | σ_2 | 0.001429 | 0.00144256 | 0.00124456 | 0.00190709 | 0.00141039 | 0.0011516 |
| p^+ | σ_1 | -0.0021472 | -0.00262226 | -0.00196308 | -0.00385218 | -0.00186708 | -0.00186749 |
| p^+ | σ_0 | 0.0107541 | 0.0109091 | 0.0104381 | 0.0115449 | 0.0109969 | 0.0107759 |
| π^- | μ_2 | 3.28823666e-04 | -1.30673670e-05 | -2.32502052e-04 | -9.75619848e-04 | -5.89834444e-04 | 5.27496718e-04 |
| π^- | μ_1 | -3.94924663e-03 | -2.66028661e-03 | -1.28565631e-03 | 9.09410075e-04 | -2.01610684e-03 | -4.42276918e-03 |
| π^- | μ_0 | 9.48011169e-04 | 1.55078786e-03 | 1.43431985e-03 | 1.35056935e-03 | 4.59833580e-03 | 2.30751866e-03 |
| π^- | σ_2 | 4.37635504e-04 | 4.38306224e-04 | 5.32057510e-04 | 3.36999845e-04 | 7.74135462e-04 | 1.36515196e-04 |
| π^- | σ_1 | -3.28011836e-03 | -3.28456104e-03 | -3.82847286e-03 | -3.11749323e-03 | -4.63110728e-03 | -2.21229710e-03 |
| π^- | σ_0 | 1.63296567e-02 | 1.62229164e-02 | 1.59769911e-02 | 1.58803427e-02 | 1.74670064e-02 | 1.51753145e-02 |
| K^- | μ_2 | -2.72020947e-03 | -5.21081786e-03 | -2.13868763e-02 | -4.45600034e-03 | -7.60703841e-03 | -5.27074813e-03 |
| K^- | μ_1 | 1.78610401e-02 | 2.30787460e-02 | 9.49357818e-02 | 1.95764575e-02 | 3.63245785e-02 | 2.92417500e-02 |
| K^- | μ_0 | -2.26190100e-02 | -2.22562379e-02 | -1.02704771e-01 | -2.25931014e-02 | -5.10484618e-02 | -3.19918187e-02 |
| K^- | σ_2 | 1.76905114e-02 | 1.62989708e-02 | 3.60928130e-02 | 1.51270521e-02 | 1.91308107e-02 | 2.38470033e-02 |
| K^- | σ_1 | -7.74901862e-02 | -7.33041628e-02 | -1.57454534e-01 | -7.26870393e-02 | -9.23654247e-02 | -1.02397836e-01 |
| K^- | σ_0 | 1.07082820e-01 | 1.00573410e-01 | 1.93148260e-01 | 1.00993689e-01 | 1.26963814e-01 | 1.30057621e-01 |

Table 4.4: Values used to calculate the mean and resolutions for hadron likelihood based identification.

Chapter 5

Beam Spin Asymmetry Analysis

5.1 Introduction

Measurement of the beam spin asymmetry is carried out for the positively charged k-meson. As discussed in the introduction, the beam spin asymmetry theoretically depends on $F_{UU,L}$, $F_{UU,T}$, $F_{UU}^{\cos\phi}$, $F_{UU}^{\cos 2\phi}$, and $F_{LU}^{\sin\phi}$. By dividing the electron-kaon events into several bins of SIDIS kinematic variables, beam spin asymmetry measurements can be taken at different average values of the kinematic variables. Finally, the structure function ratios $A_{LU}^{\sin\phi}$, $A_{UU}^{\cos\phi}$, and $A_{UU}^{\cos 2\phi}$ can be extracted from each bin. In this chapter, we discuss the selection of SIDIS events, the binning used in this analysis, our measurement with associated systematic uncertainties, and the extraction of structure function ratios using the ϕ dependence in each kinematic bin.

5.2 Event Selection and Binning

Event Selection

After particle identification is performed on the event, those events which have a trigger electron and a positive kaon are kept for analysis. We discard events that do not have $W > 2$ and $Q^2 > 1$, because they are not considered to be part of the deeply inelastic region. Additionally, to avoid exclusive resonances in the $ep \rightarrow eK^+X$ spectrum, the authors impose a cut on the missing mass of the final state X . For this analysis we use $M_X(ep \rightarrow eK^+X) > 1.25$. Finally, we attempt to perform our measurement in the current fragmentation region where factorization has been proven. This is done by excluding events with $z_h < 0.25$. We also require that $z_h < 0.75$ to avoid exclusive events. This restriction on z_h is not applied to the z_h axis, where we measure across the entire experimentally observed range. After these selection criteria have been applied, the data is sorted into kinematic bin.

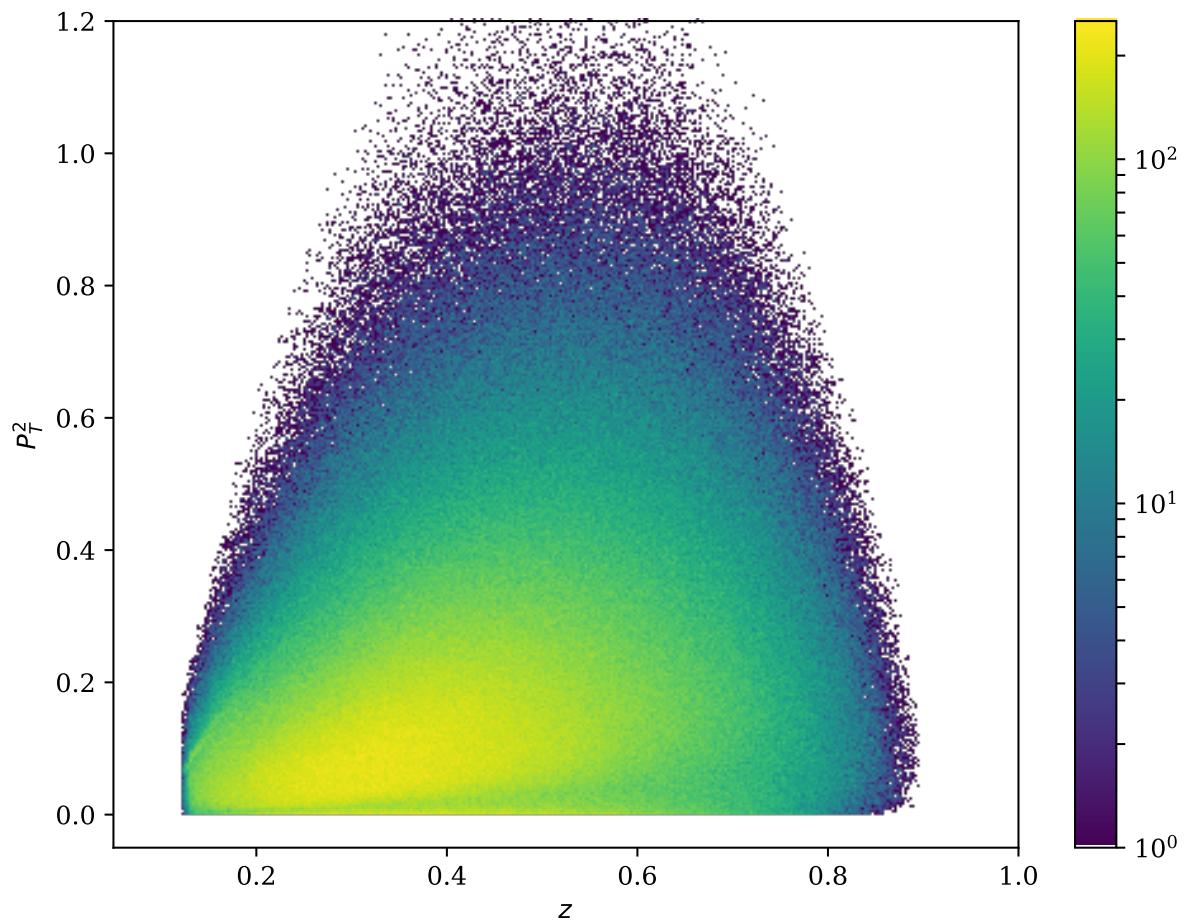


Figure 5.1: Correlation between z_h and P_T^2 for each event in our analysis sample.

Binning

For this study, the authors chose to measure the integrated beam spin asymmetry. This simply means that for a given axis (P_T for example), the events included have all observed values of the other kinematic variables (in this example x, z_h, Q^2). The axes studied are x, Q^2, z_h , and P_T . We chose to use 12 bins in ϕ and 10 bins of the other kinematic variables for a total of 120 analysis bins.

The bins were chosen using a simple method to ensure equal statistics in each bin. The procedure will be described using the axis x as an example. First, all events are sorted by their x value from smallest to largest. Then, the smallest and largest values are recorded, which are just x_1 and x_N if there are N events in the sample. Next, the target number of bins M is chosen (this choice is done by the analyst based on what he/she believes to be the best choice). Finally, the limits of each bin can be chosen simply by calculating the number of events per bin N/M and then using the value of x which corresponds to multiples of N/M in the sample.

$$\vec{b} = (x_1, x_{N/M}, x_{2N/M}, \dots, x_N) \quad (5.1)$$

Here, the symbol \vec{b} denotes a vector of $(M+1)$ x values which represent bin limits. The binning in ϕ is chosen to be regularly spaced between -180 and 180 degrees.

5.3 ϕ_h Distributions

Measured Asymmetry Values

In each bin i the beam spin asymmetry (here A_i) is calculated according to,

$$A_i = \frac{1}{P_e} \frac{n_i^+ - n_i^-}{n_i^+ + n_i^-} \quad (5.2)$$

where P_e is the average beam polarization over the dataset. The symbols n_i^\pm refer to the number of events counted in bin i with helicity \pm .

Statistical Uncertainties

The uncertainty on the measured value of A_i can be attributed to statistical uncertainty on the counts n_i^\pm , and the uncertainty associated with the measurement of P_e . The treatment of the statistical uncertainty reported on the measurement includes the contribution from counts, but not from the uncertainty in P_e which is included in the systematic errors. The uncertainty in a measured observable \mathcal{O} depends on the uncertainty of the parameters used to construct it $\vec{\theta}$ in the following way (see appendix).

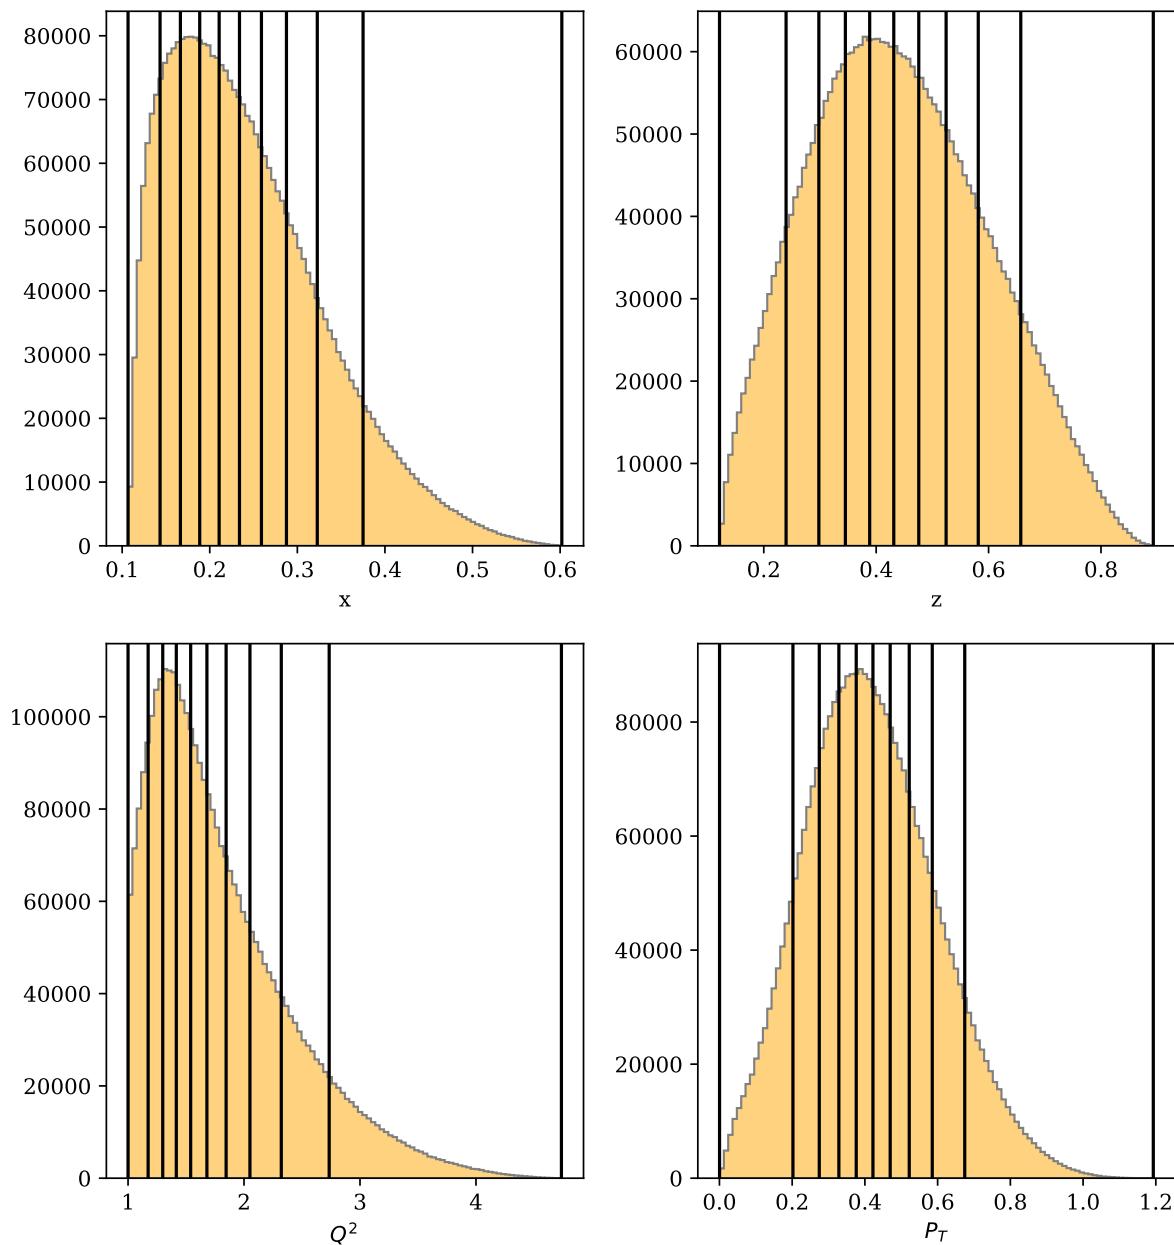


Figure 5.2: The binning used for each of the kinematic axes.

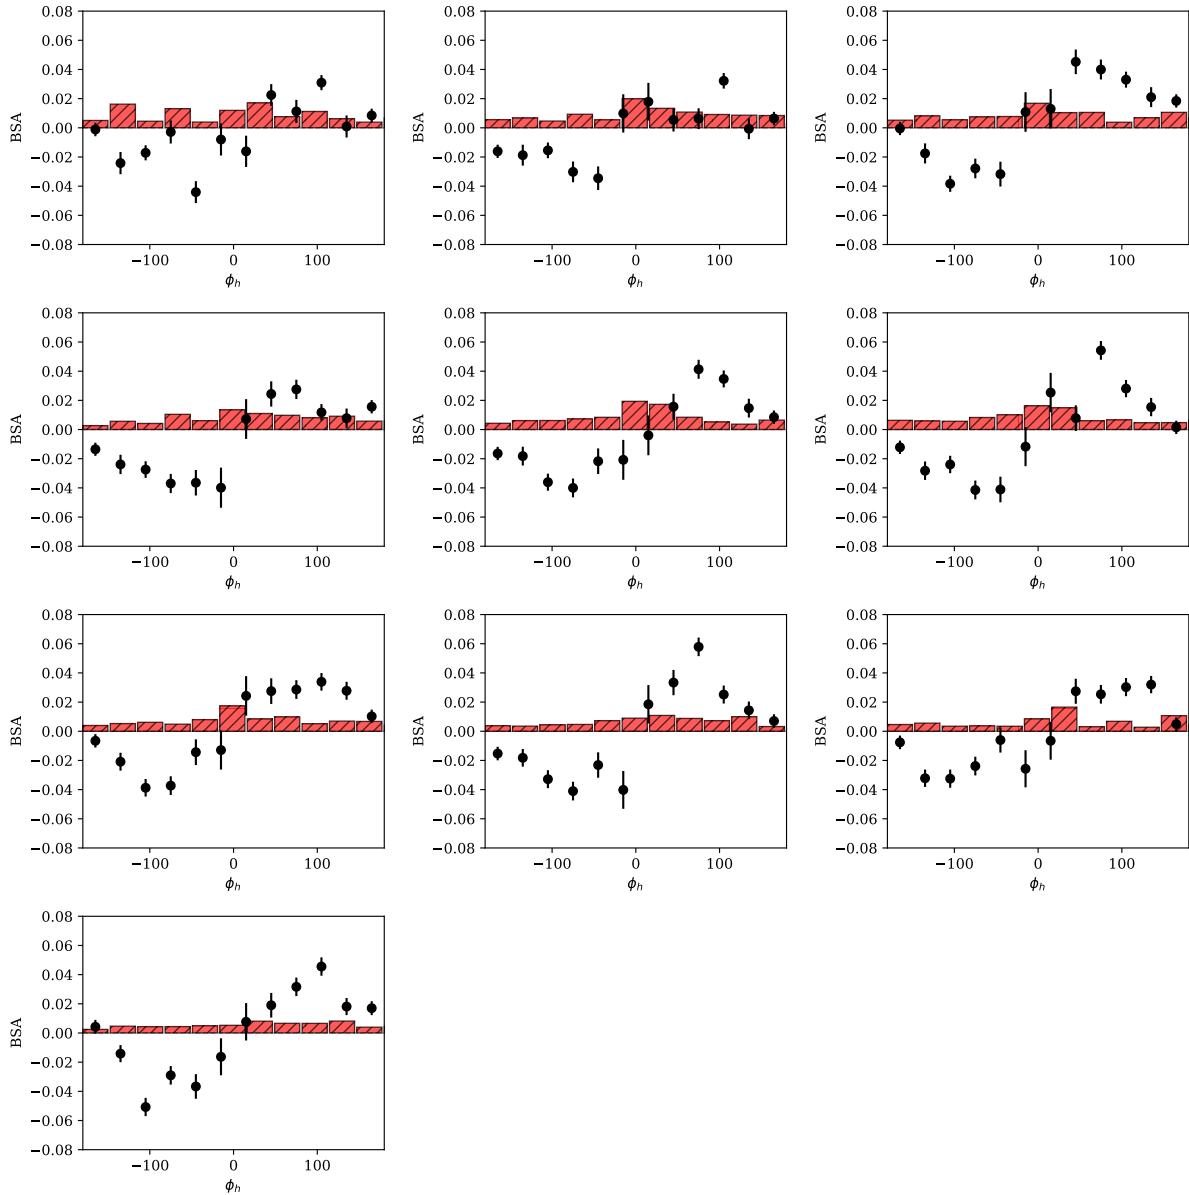


Figure 5.3: The ϕ_h dependence is shown for each bin of x , increasing in value from the top left to the bottom right. The statistical uncertainty is shown as black error bars on each point. The total systematic uncertainty is shown as a red bar centered at zero.

$$\sigma_{\mathcal{O}}^2 = \sum_{i=1}^N \sum_{j=1}^N \frac{\partial \mathcal{O}}{\partial \theta_i} \frac{\partial \mathcal{O}}{\partial \theta_j} \rho_{ij} \sigma_i \sigma_j \quad (5.3)$$

For the beam spin asymmetry in the i^{th} bin A_i one finds that without correlations ($\rho_{ij} = \delta_{ij}$) the error propagation proceeds as shown below.

$$\sigma_A^2 = \frac{A^2}{P_e^2} \sigma_{P_e}^2 + \frac{4(n_-^2 \sigma_+^2 + n_+^2 \sigma_-^2)}{P_e^2 (n_+ + n_-)^4} \quad (5.4)$$

The first term which is the contribution from the variance in the measurements of beam polarization will be included as a systematic error. The second term is used as the statistical error bars shown through the analysis. The counts n_{\pm}^i for the i^{th} bin are assumed to be Poisson in nature, and therefore have a variance equal to the expected number of counts $\sigma_{\pm}^2 = n_{\pm}^i$. With this expression for the statistical uncertainty on the counts, and dropping the beam polarization term for now, the expression becomes:

$$\sigma_A^2 = \frac{4n_+ n_-}{P_e^2 (n_+ + n_-)^3} \quad (5.5)$$

Systematic Uncertainties

Formalism

Systematic effects are shifts or biases in the measured result of some observable as a result of the procedure used in the measurement. Systematic effects can typically be identified and corrected for, or removed all together from the measurement. In the cases where an effect cannot be completely removed, the degree to which the correction for the effect is uncertain is included in the result of the measurement as a systematic uncertainty.

Sources of systematic effects can include background events from different processes which enter the sample, calibrations of different detector systems, misalignments in detector geometry, and biases in selection criteria. Each of the systematic sources mentioned here has at least one associated procedure for correcting it's effect on the analysis. As an example consider momentum corrections in CLAS. These corrections are performed to remove the effect of slight mis-alignments in detector geometry from what is in reconstruction, as well as slight differences between the true magnetic field and the field map used in reconstruction. These physical effects introduce a systematic effect, the particle 4-momenta reconstructed are shifted away from the true values. Standard reactions (elastic scattering) can be used to develop corrections for the 4-momenta of particles, and these corrections typically depend on a set of parameters $\vec{\theta}$, which have an associated parameter uncertainty described by a covariance matrix V_{ij} . It is these parameter uncertainties that propagate through to the final observables, and the assignment of

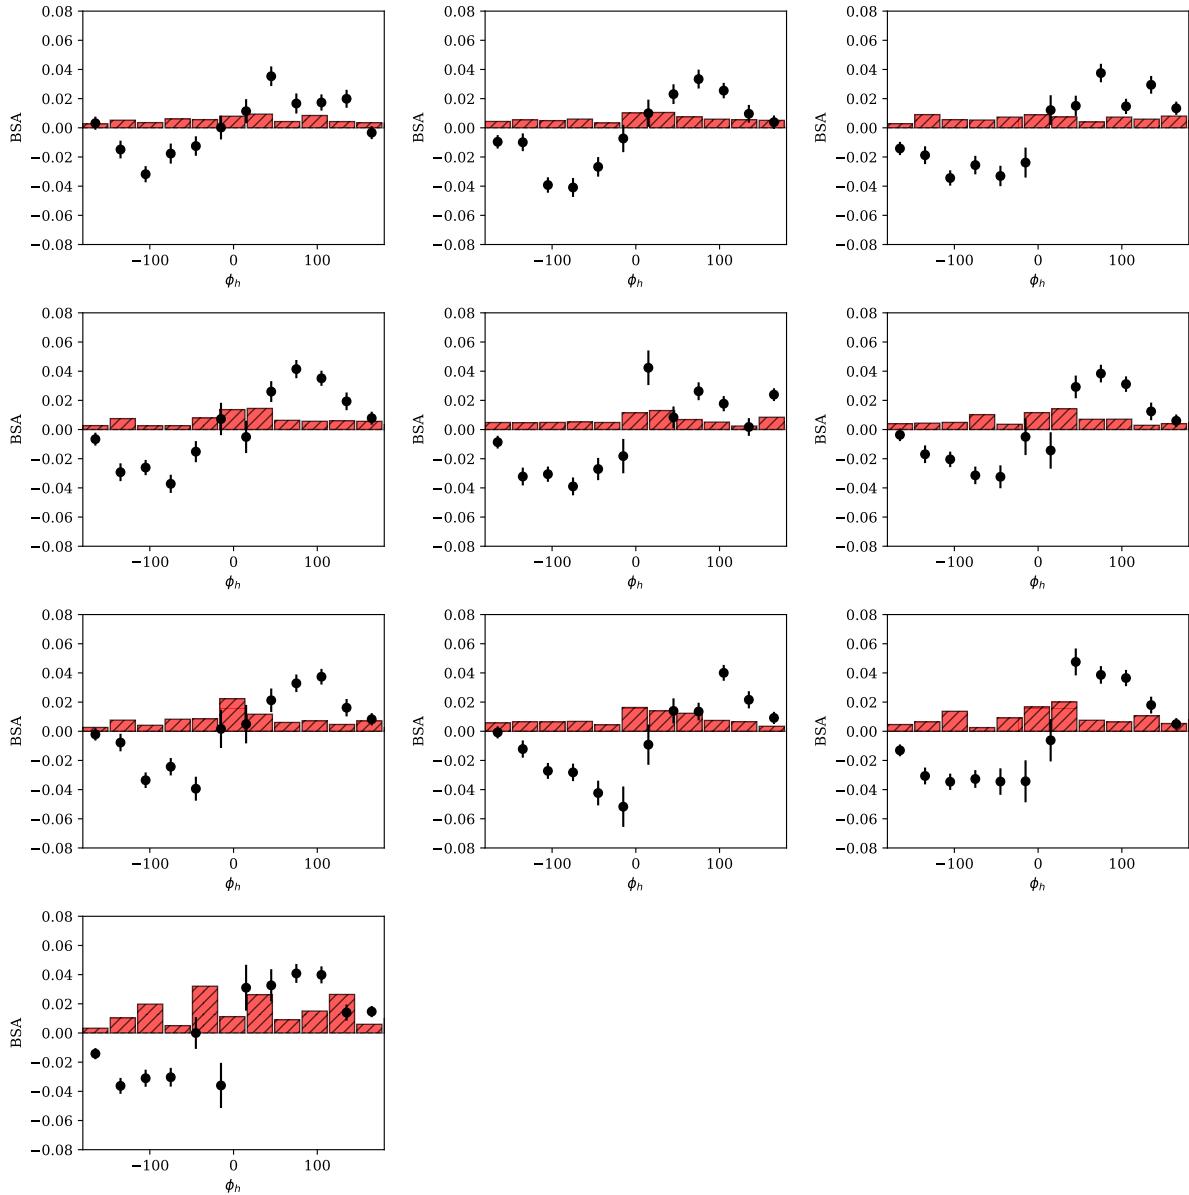


Figure 5.4: The ϕ_h dependence is shown for each bin of z_h , increasing in value from the top left to the bottom right. The statistical uncertainty is shown as black error bars on each point. The total systematic uncertainty is shown as a red bar centered at zero.

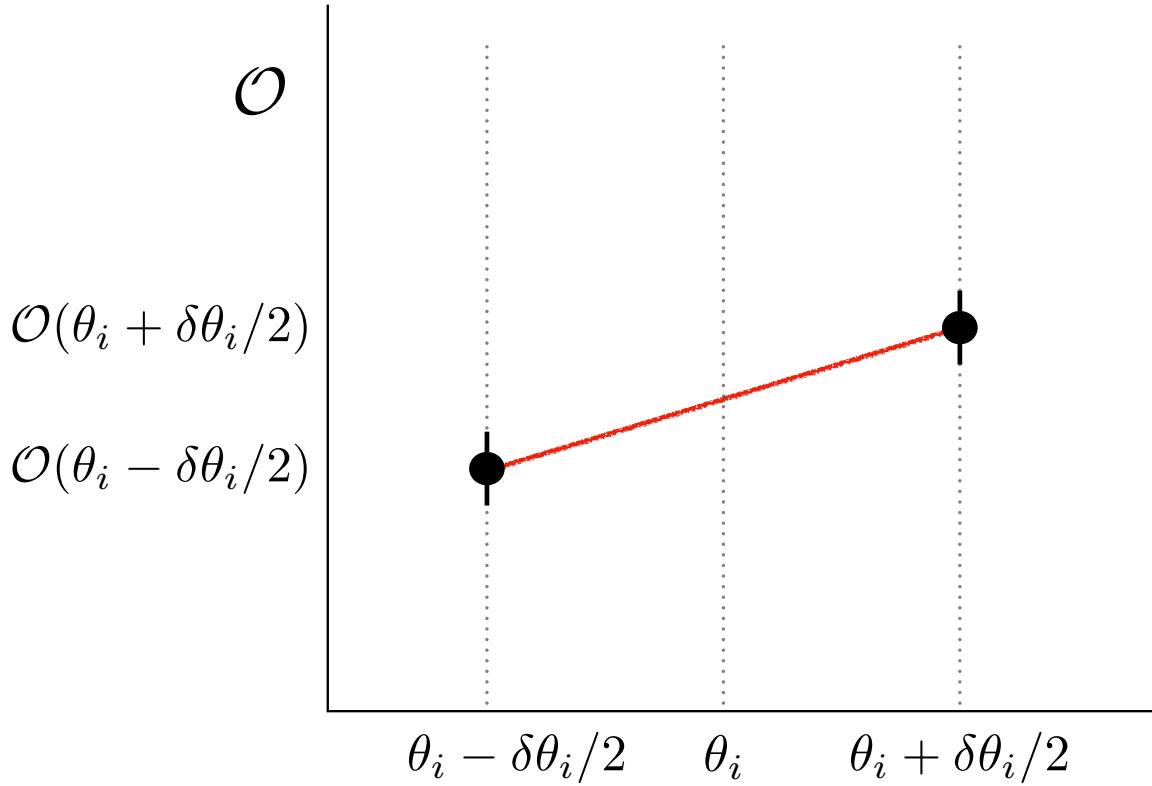


Figure 5.5: The analysis is run for variations in the input parameters θ_i to calculate the dependence of the result \mathcal{O} on each parameter, as described in this section.

the magnitude of such effects is then what is referred to as systematic uncertainty.

Systematic uncertainties can be included using the standard equation for error propagation. In some cases it is possible to analytically find the derivatives needed to calculate the dependence of the observable on a source of systematic uncertainty. This is the case for effect of the variance of the beam polarization on the beam spin asymmetry observable. However in many cases, it is not possible to analytically calculate the effect of some analysis parameter θ_i on the observable \mathcal{O} . Since the observable is usually calculated using some computational chain which starts with the input parameters $\vec{\theta}$, it is possible to find the dependence of the observable \mathcal{O} on the inputs numerically.

$$\frac{\partial \mathcal{O}}{\partial \theta_i} \approx \frac{\mathcal{O}(\theta_i + \sigma_{\theta_i}/2) - \mathcal{O}(\theta_i - \sigma_{\theta_i}/2)}{\sigma_{\theta_i}} \quad (5.6)$$

After inserting the above into equation 5.3 one finds,

$$\sigma_{\mathcal{O}}^2 = \sum_{i=1}^n \sum_{j=1}^n \rho_{ij} (\mathcal{O}(\theta_i + \sigma_{\theta_i}/2) - \mathcal{O}(\theta_i - \sigma_{\theta_i}/2)) (\mathcal{O}(\theta_j + \sigma_{\theta_j}/2) - \mathcal{O}(\theta_j - \sigma_{\theta_j}/2)) \quad (5.7)$$

| Source | Variation | Magnitude |
|------------------------------|----------------|-----------|
| Beam polarization | 0.024 | 0.000672 |
| DC Region 1 Fid. | 1 (cm) | 0.001344 |
| DC Region 3 Fid. | 3 (cm) | 0.001821 |
| EC-W | 12 (cm) | 0.000948 |
| EC-V | 12 (cm) | 0.000797 |
| EC-U | 12 (cm) | 0.002487 |
| Kaon Confidence (α) | 0.01-0.07 | 0.001827 |
| θ_{cc} Matching | σ | 0.001152 |
| EC Energy Deposition | 0.01 (GeV) | 0.001644 |
| p_{K^+} | $2.5-E_{beam}$ | 0.002360 |
| EC Sampling Fraction | 0.5σ | 0.001240 |
| Z-Vertex | 0.5 (cm) | 0.002581 |
| Statistical | - | 0.007494 |
| MC Estimate | - | 0.002917 |

Table 5.1: Different sources of systematic effect considered in this analysis. The magnitude of the effect is shown here averaged over all bins. The units of the shift are just the same units of the asymmetry value.

where ρ_{ij} is the correlation $V_{ij}/\sigma_i\sigma_j$. In most cases, these correlations are assumed to be zero. In some cases, when the parameters θ_i , θ_j come from a fit one may have a correlation provided by the covariance matrix and it should be used. In the case where correlations are assumed to be zero, the total systematic uncertainty is simply the quadrature sum of the shift in the observable within the uncertainty window on each parameter.

$$\sigma_{\mathcal{O}}^2 = \sum_{i=1}^n \left[\mathcal{O}(\theta_i + \sigma_{\theta_i}/2) - \mathcal{O}(\theta_i - \sigma_{\theta_i}/2) \right]^2 \quad (5.8)$$

Another approach exists that takes into account possible correlations between the analysis parameters θ_i . This approach has not yet been widely used, and probably requires a thorough understanding of systematics using the previously described method before its application. The approach consists of generating monte carlo M sets of parameters $\vec{\theta}$ and obtaining M results for the observable \mathcal{O} . The results are then interpreted probabilistically and the observable value and total systematic error are reported as the mean and standard deviation of the results.

$$\langle \mathcal{O} \rangle = \frac{1}{M} \sum_{i=1}^M \mathcal{O}_i \quad (5.9)$$

$$\sigma_{\mathcal{O}}^2 = \frac{1}{M-1} \sum_{i=1}^M (\mathcal{O}_i - \langle \mathcal{O} \rangle)^2 \quad (5.10)$$

Sources of Systematic Uncertainty

The table 5.1 below summarizes the sources of systematic effects considered in this analysis.

Except for the beam polarization and the momentum of the kaon track, all parameters listed in the table are treated using the formalism outlined above. The beam polarization uncertainty quoted at 2.4%

contains contributions from the standard deviation of the Moller polarimetry measurements (0.2%), residual target polarization effects (1.4%), and atomic motion/finite acceptance corrections (0.8%).

Because of the inability to distinguish kaon, pion, and proton tracks at higher momentum, the maximum kaon track momentum is varied between 5.5 (no maximum) and 2.5 GeV. The difference between these results is quoted as a systematic uncertainty and added in quadrature with the other sources. This source of systematic uncertainty has a larger effect on the z_h -axis, because z_{max} is limited by limiting p_{max} . While for the large z_h -bins this contribution is dominant, its size is comparable with other systematic sources throughout the remainder of the bins.

5.4 Extraction of Modulations

The motivation to measure the beam spin asymmetry in several kinematic bins as well as bins of ϕ_h is to perform an estimate of the value of structure functions at the kinematic points (or the average value of the structure functions over the range of values included in a point). To do this, the authors perform parameter estimation on the ϕ_h distributions taking as a model the theoretical dependence of the beam spin asymmetry on ϕ_h .

$$f(\phi_h, \vec{a}) = \frac{a_0 \sin \phi_h}{1 + a_1 \cos \phi_h + a_2 \cos(2\phi_h)} \quad (5.11)$$

The parameters \vec{a} are the structure function ratios we wish to extract. The simplest way to extract these parameters is to use a standard fitting package like `Minuit` or `scipy.optimize.minimize`. In these approaches, χ^2 is defined as the square difference between the observed data values and those predicted by the model, normalized by the error. If the fluctuation between the data and theory predictions is on the order of the error, the χ^2 is simply on the order of the number of data points. The parameters \vec{a} which best describe the data are those which make the $\chi^2(\vec{a})$ assume it's minimum value. This minimization is done in practice with gradient descent or quasi-Newton's method based algorithms, and we will not discuss details of these here. It is sufficient to say that these methods produce the parameters \vec{a} , and an estimate of the covariance matrix V . These parameters and their errors become the extracted value and uncertainty on the extracted values of the structure function ratio in each bin.

Unfortunately, applying the standard single-fit procedure described above does not always produce stable results. In some cases, the resulting parameter sets are reasonable, in other cases however the parameters in the denominator become unphysically large and oppose each other. This effect has motivated previous analysts to search for other means of extracting the dominant $\sin \phi_h$ behaviour from the distributions. One common technique is to assume that a_1 and a_2 of above are small compared to

1. The analyst can then fit the ϕ_h distribution with just one linear parameter a_0 . This produces a stable result, but has the disadvantage that one needs to introduce a systematic uncertainty associated with the difference observed between using the full model (with a restricted range for the parameters in the denominator) and the results obtained using the single parameter model. In order to avoid this, the authors choose to use a Monte Carlo method of replicas. The replica method consists of generating N_{rep} psuedo-data ϕ_h distributions which have a normal distribution located at the observed value, and with a variance equal to the statistical errors on the associated data point.

$$\vec{A}_{rep} = \mathcal{N}(\vec{A}, \sigma_A) \quad (5.12)$$

Where here \vec{A} is a vector of length n_{phi} bins, representing the measured beam spin asymmetry for each value of ϕ_h in a given kinematic bin. Each of these distributions is fit with the full model, and the resulting parameter values are saved. The final reported value for each fit parameter, as well as it's uncertainty can be reported as the mean, and standard deviation of the fit results. This procedure which is similar to bootstrapping, can be seen as an attempt to fit the underlying distribution that generated the data while avoiding the statistical noise. This technique has been discussed in [14].

$$\langle a_j \rangle = \sum_{i=1}^{N_{rep}} a_j^{(i)} \quad (5.13)$$

$$\sigma_{a_j}^2 = \frac{1}{N_{rep} - 1} \sum_{i=1}^{N_{rep}} (a_j^{(i)} - \langle a_j \rangle)^2 \quad (5.14)$$

Results

We observe that the term $A_{LU}^{\sin\phi}$ is weakly dependent on the kinematic variables. The value is around +3% for most bins.

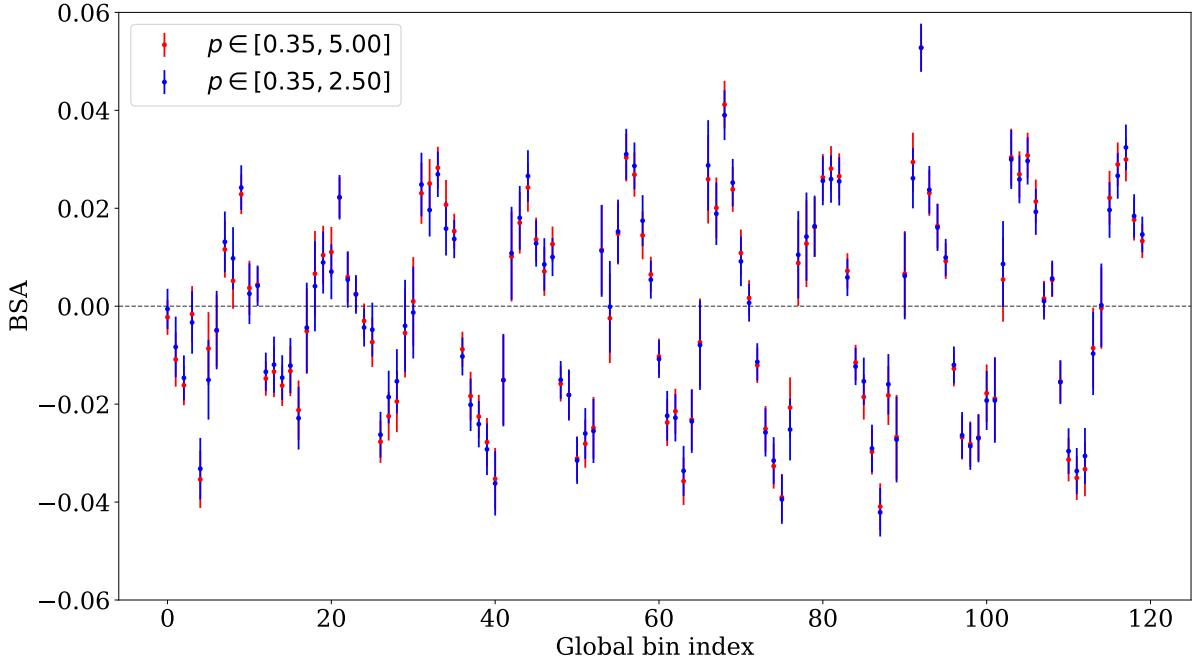


Figure 5.6: The BSA for each bin of x, ϕ_h (all plotted together on the x-axis) is compared with and without a maximum momentum (no tracks exceed 5 GeV) for the kaon track. The global bin coordinate on the x-axis is $i + n_\phi * j$ where i is the ϕ_h bin, j is the x bin, and n_ϕ is the number of ϕ bins (12). Both i and j start at 0.

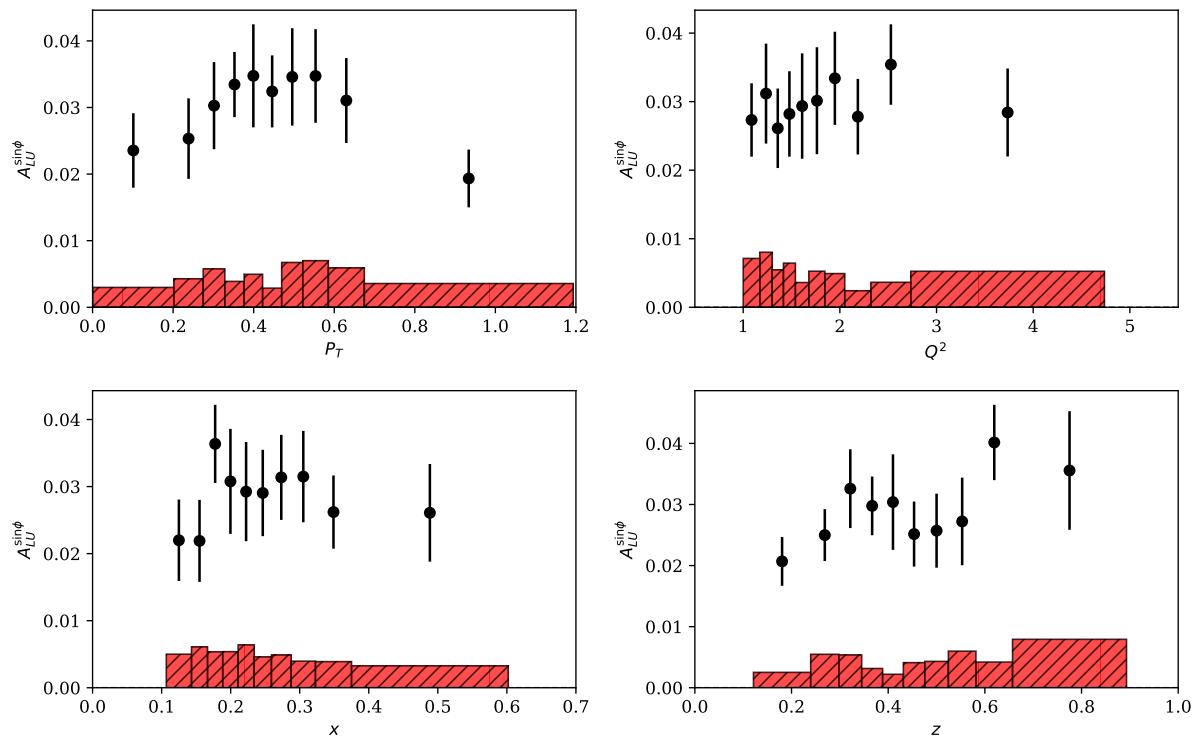


Figure 5.7: Our extraction of $A_{LU}^{\sin\phi}$ for the kinematic bins described above. The black error bars represent uncertainty in the extraction of the parameter value. Red error bars are systematic uncertainties.

Appendix A: Derivation of formulas related to errors

Propagation of errors

Let \vec{x} be a set of n random variables $\vec{x} = (x_1, x_2, \dots, x_n)$ and known mean $\mu_i = \langle x_i \rangle$ and covariance $V_{ij} = \langle x_i x_j \rangle - \langle x_i \rangle \langle x_j \rangle$. Suppose that we measure a function $f(\vec{x})$ that depends on the variables \vec{x} and we want to understand how the covariances V_{ij} on \vec{x} will show up manifest themselves as errors on our measurement of $f(\vec{x})$. We can start by expanding our function around the expected value of x_i .

$$f(\vec{x}) \approx f(\vec{\mu}) + \sum_{i=1}^n \frac{\partial f}{\partial x_i} \Big|_{x_i=\mu_i} (x_i - \mu_i) \quad (15)$$

We can then take the expectation value of our function.

$$\langle f(\vec{x}) \rangle = \langle f(\vec{\mu}) \rangle + \sum_{i=1}^n \frac{\partial f}{\partial x_i} \Big|_{x_i=\mu_i} \langle x_i - \mu_i \rangle \quad (16)$$

Where here the term $\langle x_i - \mu_i \rangle$ is zero.

$$\langle x_i - \mu_i \rangle = \langle x_i \rangle - \mu_i = \mu_i - \mu_i = 0 \quad (17)$$

It is apparent then that the expectation value of our function f evaluated close to the expected values of our variables \vec{x} is just the function evaluated at the expectation value of the random variables \vec{x} .

$$\langle f(\vec{x}) \rangle = \langle f(\mu) \rangle = f(\mu) \quad (18)$$

We can also consider the second moment $\langle f^2(\vec{x}) \rangle$,

$$\langle f^2(\vec{x}) \rangle \approx \left\langle \left(f(\vec{\mu}) + \sum_{i=1}^n \frac{\partial f}{\partial x_i} \Big|_{x_i=\mu_i} (x_i - \mu_i) \right)^2 \right\rangle \quad (19)$$

which is,

$$= \langle f^2(\mu) \rangle + \sum_{i=1}^n \sum_{j=1}^n \frac{\partial f}{\partial x_i} \Big|_{x_i=\mu_i} \frac{\partial f}{\partial x_j} \Big|_{x_j=\mu_j} \langle (x_i - \mu_i)(x_j - \mu_j) \rangle + 2 \left\langle f(\mu) \sum_{i=1}^n \frac{\partial f}{\partial x_i} \Big|_{x_i=\mu_i} (x_i - \mu_i) \right\rangle \quad (20)$$

and the last expectation value vanishes due to the same logic used when calculating the first moment. We recognize the term $\langle (x_i - \mu_i)(x_j - \mu_j) \rangle$ as the element of the covariance matrix V_{ij} . Our second moment is then complete as follows.

$$\langle f^2(\vec{x}) \rangle = f^2(\mu) + \sum_{i=1}^n \sum_{j=1}^n \frac{\partial f}{\partial x_i} \Big|_{x_i=\mu_i} \frac{\partial f}{\partial x_j} \Big|_{x_j=\mu_i} V_{ij} \quad (21)$$

We can then calculate the variance of the function.

$$\sigma_f^2 = \langle f^2(\vec{x}) \rangle - \langle f(\vec{x}) \rangle^2 \quad (22)$$

$$= (f^2(\vec{\mu}) - f^2(\vec{\mu})) + \sum_{i=1}^n \sum_{j=1}^n \frac{\partial f}{\partial x_i} \Big|_{x_i=\mu_i} \frac{\partial f}{\partial x_j} \Big|_{x_j=\mu_i} V_{ij} \quad (23)$$

$$= \sum_{i=1}^n \sum_{j=1}^n \frac{\partial f}{\partial x_i} \Big|_{x_i=\mu_i} \frac{\partial f}{\partial x_j} \Big|_{x_j=\mu_i} V_{ij} \quad (24)$$

This is the standard error propagation formula which is widely used. These correlations σ_{ij} can arise from several sources.

- Common measurement uncertainties.
- Correlations in $x_i x_j$ leading to correlations in $\sigma_i \sigma_j$.

References

- [1] E. Leader and M. Anselmino, *Proceedings, 8th International Symposium on High-energy Spin Physics: Minneapolis, Minnesota, USA, September 12-17, 1988. Vol. 1, 2*, Z. Phys. **C41**, 239 (1988), [AIP Conf. Proc.187,764(2008)].
- [2] P. J. Mulders and R. D. Tangerman, Nucl. Phys. **B461**, 197 (1996), [Erratum: Nucl. Phys.B484,538(1997)], arXiv:hep-ph/9510301 [hep-ph].
- [3] A. Bacchetta, M. Diehl, K. Goeke, A. Metz, P. J. Mulders, and M. Schlegel, JHEP **02**, 093 (2007), arXiv:hep-ph/0611265 [hep-ph].
- [4] A. Airapetian *et al.* (HERMES), Phys. Rev. Lett. **103**, 152002 (2009), arXiv:0906.3918 [hep-ex].
- [5] A. Airapetian *et al.* (HERMES), Phys. Rev. **D87**, 074029 (2013), arXiv:1212.5407 [hep-ex].
- [6] M. Aghasyan *et al.* (COMPASS), Phys. Rev. **D97**, 032006 (2018), arXiv:1709.07374 [hep-ex].
- [7] Y. C. Chao *et al.*, J. Phys. Conf. Ser. **299**, 012015 (2011).
- [8] G. Adams *et al.*, Nucl. Instrum. Meth. **A465**, 414 (2001).
- [9] M. D. Mestayer *et al.*, Nucl. Instrum. Meth. **A449**, 81 (2000).
- [10] E. S. Smith *et al.*, Nucl. Instrum. Meth. **A432**, 265 (1999).
- [11] M. Amarian *et al.*, Nucl. Instrum. Meth. **A460**, 239 (2001).
- [12] M. Mirazita, “Kinematic corrections for e1-f,” .
- [13] R.-G. Ping *et al.*, Int. J. Mod. Phys. **A24S1**, 23 (2009).
- [14] G. Watt and R. S. Thorne, JHEP **08**, 052 (2012), arXiv:1205.4024 [hep-ph].