

WaterPressureSensor / Single-sided module carrier

A2: SINGLE-SIDED PCB REVIEW - VERIFY MECHANICS BEFORE FABRICATION


USB on U1 is the only power input. Direct sensor signal to A0.

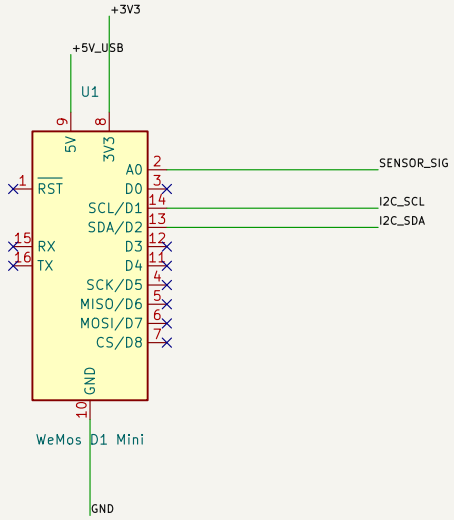

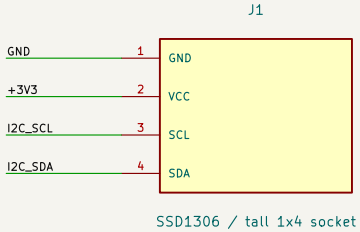


SSD1306 / tall 1x4 socket

OLED: second tier OVER WeMos; tall 1x4 socket
Front view, left to right: 1 GND, 2 VCC, 3 SCL, 4 SDA
VCC = 3.3V from U1; reference envelope 27 x 27 x 3.5mm

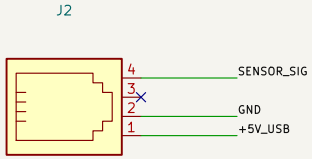

RJ-10 / 4P4C PCB jack

J2: RJ-10 / 4P4C PCB-mounted socket
1: +5V_USB 2: GND 4: SENSOR_SIG to U1.A0
3: reserved / unused on carrier



USB power source in U1

MECHANICAL CHECKS BEFORE FABRICATION
1. Type-C WeMos header fit and OLED header pitch/offset
2. Actual RJ-10 jack versus selected EVERCOM family
3. Elevated socket mating height and RF clearance

PCB intent: B.Cu only; through-hole assembly
No external analog conditioning, per user requirement
RJ-10 pin 3 and unused MCU pins are NC; no ERC exclusions

Electrical connections defined; mechanical verification pending

Sheet: /
File: WaterPressureSensor.kicad_sch

Title: WaterPressureSensor - module carrier

Size: A4	Date: 2026-10-17	**Rev: A2 REVIEW**
KiCad E.D.A. 10.0.6		Id: 1/1