
HAMMERHEADS MUST NOT BE USED FOR COMMERCIAL PROJECTS



NOTES:

- 1. TURNAROUNDS SHALL BE REQUIRED WHEN DRIVEWAYS OR ACCESS ROADS EXCEED 50-FEET IN LENGTH, OR AS REQUIRED BY CAL
- 2. DRIVEWAY AND ACCESS ROAD WIDTHS PER DWGS FP-7 AND FP-8.
- 3. ALL RADII MUST BE MEASURED FROM THE CENTER OF THE BULBOUT TO THE EDGE OF DRIVING SURFACE OR FACE OF ASPHALT DIKE OR CONCRETE CURB.
- 4. MAXIMUM CROSS SLOPE THROUGHOUT THE TURNOUT MUST NOT EXCEED 5 % IN ANY DIRECTION.
- 5. OPTIONAL: VEHICLE OVERHANG LIMITS, DRIVING SURFACE IN THIS AREA IS NOT REQUIRED, HOWEVER SURFACE MUST BE LEVEL AND CLEAR OF ALL OBSTRUCTIONS.
- 6. VEGETATION CLEAR ZONE PER DWG FP-6 MUST BE MAINTAINED FOR CAL FIRE ACCESS.
- 7. DEAD-END ACCESS ROAD LENGTHS MUST NOT EXCEED THAT SHOWN IN TABLE 1, OR AS APPROVED BY CAL FIRE.

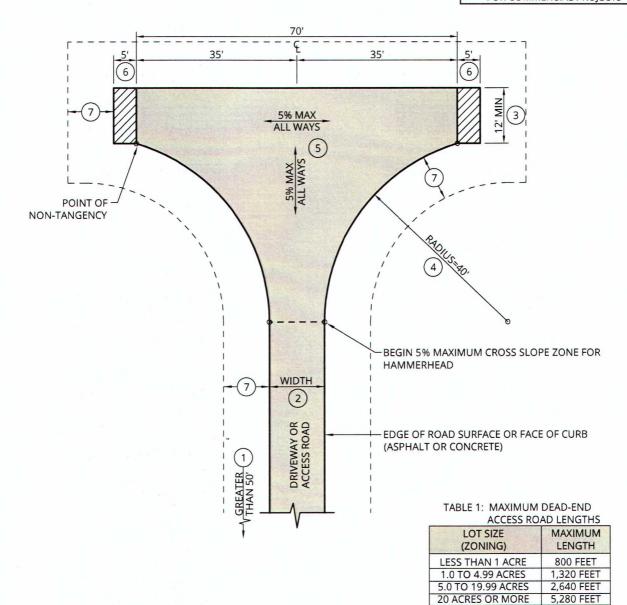

COUNTY OF SAN LUIS OBISPO FIRE DEPARTMENT / CAL FIRE

TURNAROUND HAMMERHEAD

FOR PRIVATE DRIVEWAYS & ACCESS ROADS

Adopted:	Scale:
Aug. 2014	1"=20'
Revised:	Revision No.:
Apr. 2017	1
Drawing No.:	P-14