
Perfboard 70 × 50 mm, top view (component side), rev B.3

2.54 mm grid, 24 × 18 holes Ø1.0; 4 × 4 mm corner notches; SW2 actuator points to the x = 70 edge

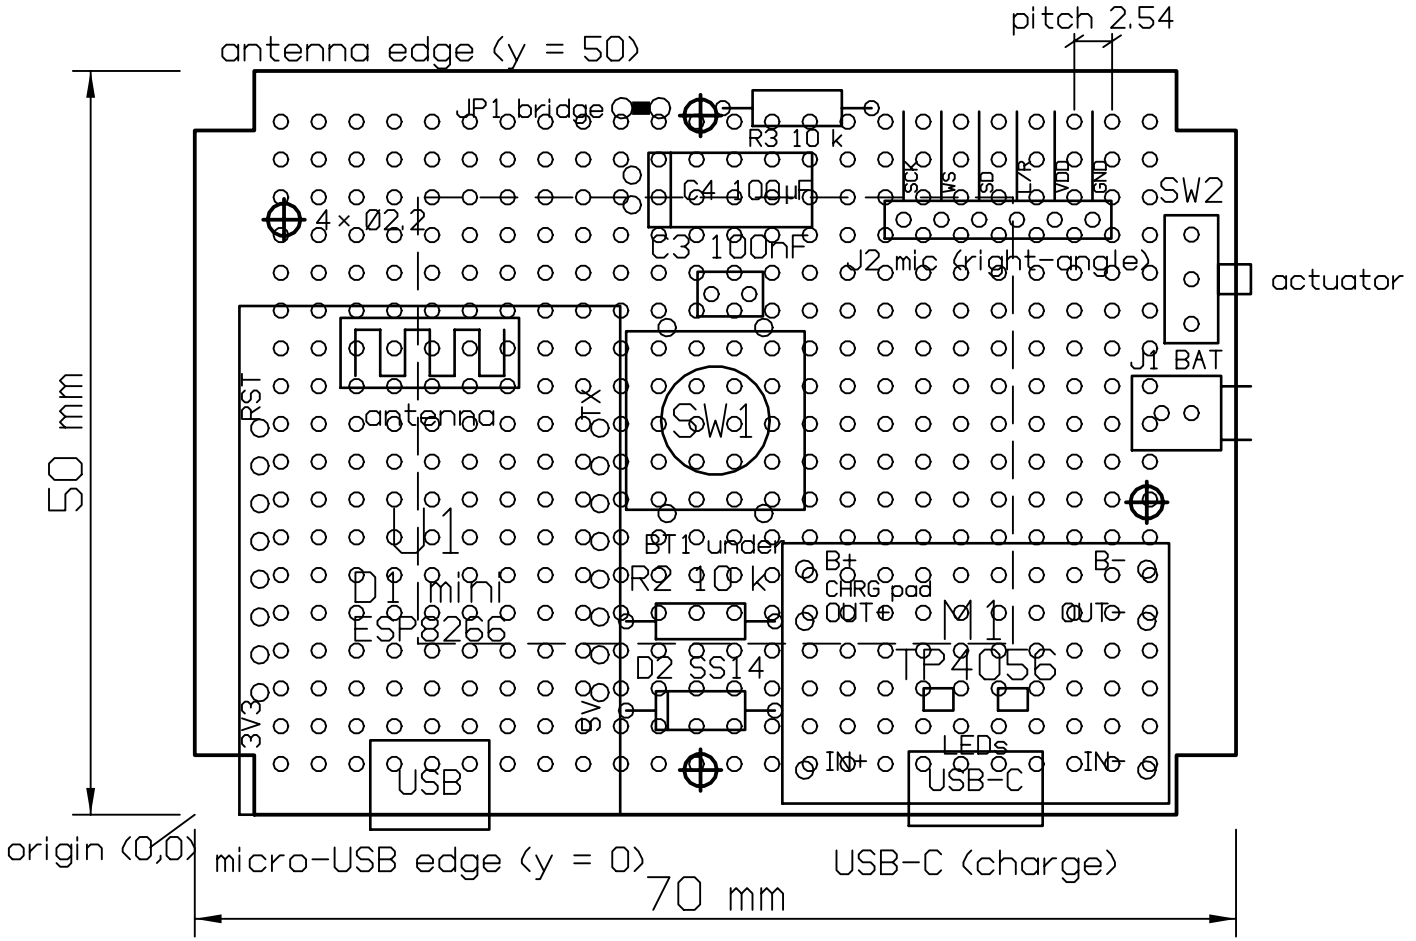

— — BT1 LiPo 803040 (40 × 30 × 8) taped to the floor under the perfboard, centred (35, 26.5)

10 mm M2 INMP441 I2S mic under the lid, 6 wires into J2 from y = 50

D2 band (cathode) toward U1; JP1 = solder bridge (closed = battery mode)