
Perfboard 70 × 50 mm, top view (component side), rev B.1

2.54 mm grid, 24 × 18 holes Ø1.0; SW2 actuator points to the x = 70 edge

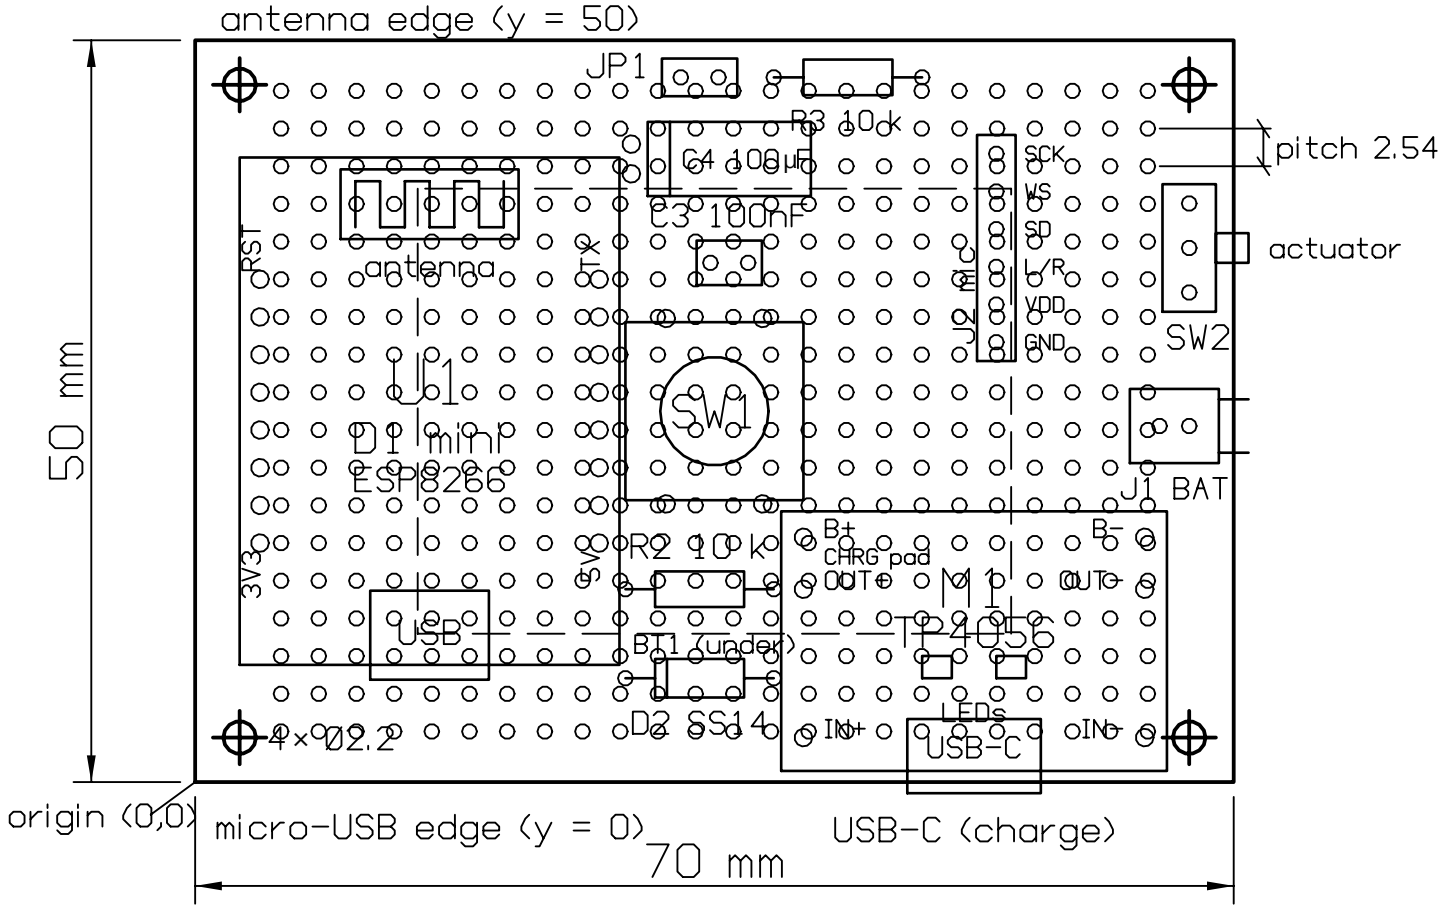

— — BT1 LiPo 803040 (40 × 30 × 8) taped to the floor under the perfboard, centred (35, 25)

10 mm M2 INMP441 I2S mic sits under the lid, 6 wires to header J2; D2 band (cathode) toward U1