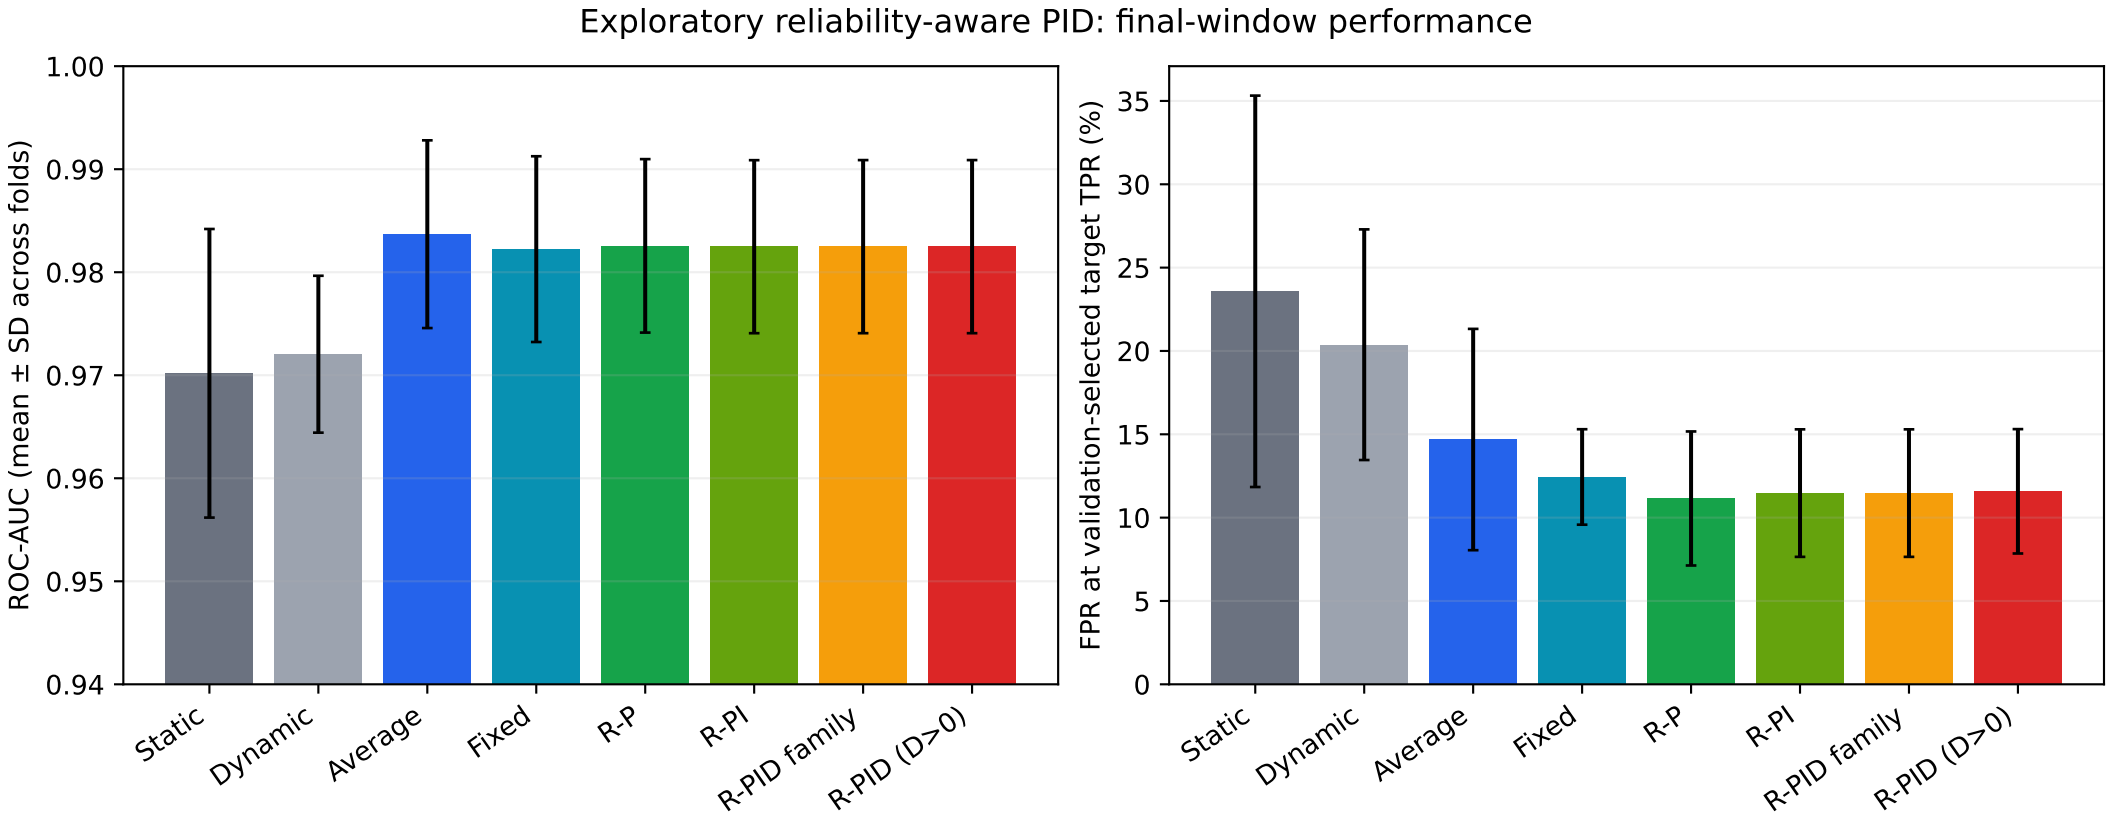
Exploratory reliability-aware PID: final-window performance
ROC-AUC (mean ± SD across folds)
1.00
0.99
0.98
0.97
0.96
0.95
0.94
Static
Dynamic
Average
Fixed
R-P
R-PI
R-PID family
R-PID (D>0)
FPR at validation-selected target TPR (%)
35
30
25
20
15
10
5
0
Static
Dynamic
Average
Fixed
R-P
R-PI
R-PID family
R-PID (D>0)